




PLAN VIEW

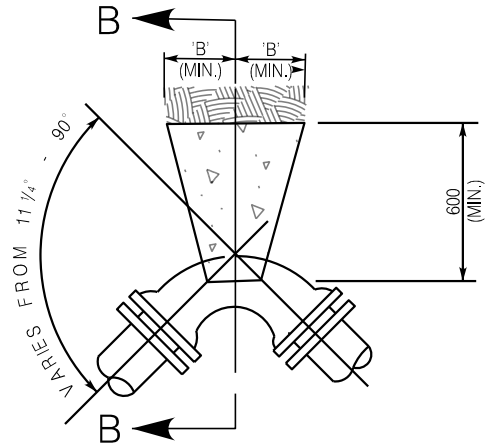

PLAN VIEW




**TEES
SECTION A-A**




**11 1/4° - 22 1/2° - 45° & 90° BENDS
SECTION B-B**

DIMENSION 'A'	
100 TO 200 DIA.	250 TO 300 DIA.
300	450

	DIMENSION 'B'			
	150 DIA.	200 DIA.	250 DIA.	300 DIA.
45°	300	300	600	600
90°	300	400	600	600
22 1/2° & 11 1/4°	300	300	300	300

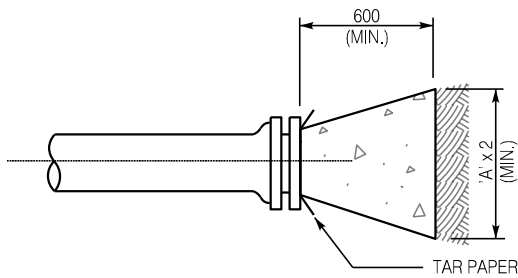


PLAN VIEW

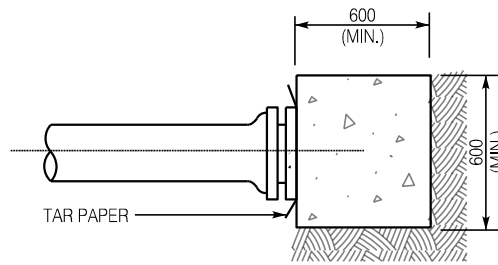

**PLUGS - PERMANENT
SIDE VIEW**

NOTES:

1. ABOVE ANCHOR BLOCKS TO BE USED ON MECHANICAL JOINT AND TYTON JOINT FITTINGS.
2.  DENOTES UNDISTURBED GROUND.
3. ALL CONCRETE TO BE 32 MPa.

City of Hamilton
Public Works Department

**CONCRETE ANCHOR BLOCKS FOR
300mm DIA. WATERMAINS AND SMALLER**

DIMENSIONS SHOWN ARE IN MILLIMETRES
UNLESS OTHERWISE NOTED (N.T.S.)

DATE
June 2025

REV No
2

FORMERLY: RWS-400

HAMILTON STD No

WM-204.01