



SIDE ELEVATION
(DETAIL B)

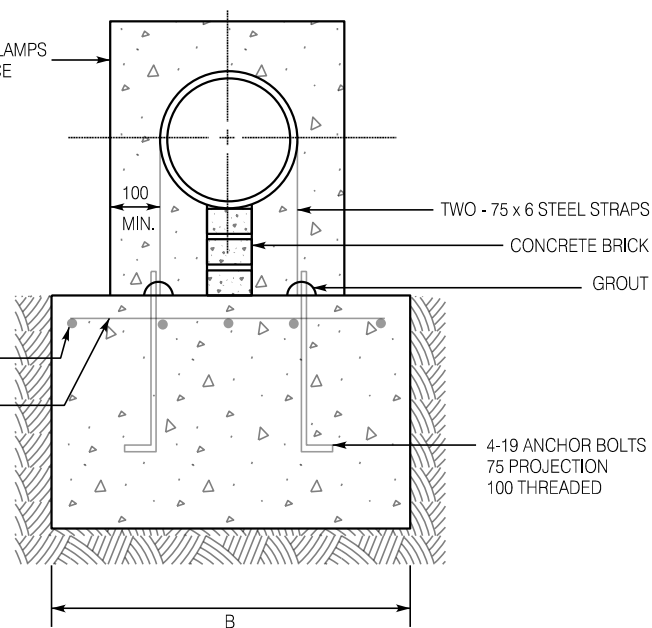


SECTION B-B

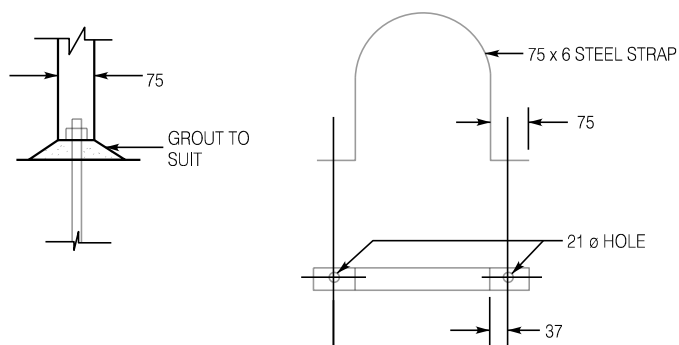

STEEL STRAPPING
DETAILS

NOTES:

1.  DENOTES UNDISTURBED GROUND.
2. ALL CONCRETE TO BE 32 MPa.
3. MINIMUM COVER OF CONCRETE OVER REINFORCING TO BE 75mm.
4. ALL REINFORCING STEEL TO BE GRADE 400.

		MIN. DIMENSION (mm)			
		22 ½° BEND		45° BEND	
		A	B	A	B
PIPE DIA. (mm)	150	900	550	1100	800
	200	1050	700	1400	900
	250	1200	850	1600	1100
	300	1400	950	1700	1300

City of Hamilton
Public Works Department

**CONCRETE ANCHOR BLOCK FOR
100mm TO 300mm DIA. WATERMAIN LOWERING**

DIMENSIONS SHOWN ARE IN MILLIMETRES
UNLESS OTHERWISE NOTED (N.T.S.)

DATE
June 2025

REV No

FORMERLY: RWS-413(2)

HAMILTON STD No

WM-204.15