Local Planning Appeal Tribunal

Tribunal d'appel de l'aménagement local

17-239-LPAT-01 Exhibit A

17-240-LPAT-01 Exhibit B



ISSUE DATE: November 16, 2018

CASE NO(S).:

PL171450

The Ontario Municipal Board (the "OMB") is continued under the name Local Planning Appeal Tribunal (the "Tribunal"), and any reference to the Ontario Municipal Board or Board in any publication of the Tribunal is deemed to be a reference to the Tribunal.

PROCEEDING COMMENCED UNDER subsection 17(24) of the Planning Act, R.S.O. 1990, c. P.13, as amended

Appellant:

1826210 Ontario Inc.

Appellant:

Centurion (Dundas) Holdings Ltd.

Appellant:

Marz Homes Holdings Inc.

Appellant:

Ministry of Municipal Affairs; and others Proposed Official Plan Amendment No. 69

Subject: Municipality:

City of Hamilton

OMB Case No.:

PL171450 PL171450

OMB File No.:

OMB Case Name:

Centurion (Dundas) Holdings Ltd. v. Hamilton

(City)

PROCEEDING COMMENCED UNDER subsection 34(19) of the Planning Act, R.S.O. 1990, c. P.13, as amended

Appellant:

1804487 Ontario Inc.

Appellant:

1826210 Ontario Inc.

Appellant:

2294643 Ontario Inc.

Appellant:

2531083 Ontario Inc.; and others

Subject:

By-law No. 17-240

Municipality:

City of Hamilton

OMB Case No.:

PL171450

OMB File No.:

PL171451

PROCEEDING COMMENCED UNDER subsection 12(1) of the Local Planning Appeal Tribunal Act, 2017, S.O. 2017, c. 23, Sched. 1, and Rule 9.01 of the Tribunal's Rules of Practice and Procedure

Request by:

City of Hamilton

Request for:

Request for Directions

Heard:

By Written Motion

APPEARANCES:

Parties

Counsel/Representative*

City of Hamilton ("City")

Joanna Wice

64 Main Street East Hamilton Inc.

No appearance

939158 Ontario Inc.

Nick DeFilippis*

1804487 Ontario Inc.

Peter Tice

1826210 Ontario Inc.

Sam Esposto*

2294643 Ontario Inc.

Johanna Shapira and Yvonne Choi

2531083 Ontario Inc.

Peter Tice

Canadian Tire Real Estate Limited

(CTREL)

Melissa Winch

Centurion (Dundas) Holdings Ltd.

Anna Toumanians

Choice Properties Real Estate Investment Trust (CP REIT) and

Loblaw Properties Limited

David Neligan and Eileen Costello

Hamilton-Halton Home Builders' Association

Denise Baker

King Stuart Developments Inc.

Marc Kemerer

LJM Developments Inc.

Russell Cheeseman and E. C. Cheeseman,

Student-at-law

Marfad Holdings Inc.

Anna Toumanians

Marz Homes Holdings Inc.

David Ionico

Ministry of Municipal Affairs and

Claire Young

Housing

MM Green Development (Stoney

Creek) Inc.

Anna Toumanians

Rolanco Network Inc.

No appearance

Rose Hamilton Homes Inc.

Russell Cheeseman and E. C. Cheeseman,

Student-at-law

Royal Connaught inc.

No appearance

Slate Asset Management

Raj Kehar

DECISION OF THE TRIBUNAL DELIVERED BY BLAIR S. TAYLOR AND ORDER OF THE TRIBUNAL

INTRODUCTION

- [1] In August of 2018, the City of Hamilton brought a written Motion seeking partial approval of the Urban Hamilton Official Plan Amendment 69 ("UHOPA") and deeming parts of Zoning By-law No. 17-240 ("ZBA") to be in force and effect based on the Affidavit of Joanne Hickey-Evans dated August 23, 2018.
- [2] The Tribunal considered the matter at a Pre-hearing Conference on October 10, 2018 and as the Tribunal did not have in evidence the UHOPA or the ZBA, directed that the City could forward to the Tribunal and all parties the UHOPA and ZBA, and the Tribunal would consider the Motion.
- [3] On or about October 26, 2018 the Tribunal received the Affidavit of Joanne Hickey-Evans dated October 26, 2018 to which annotated versions of the UHOPA and ZBA were attached. These materials were also provided to all parties and prospective parties.
- [4] The Tribunal has now marked the communication from the City as Exhibit 5A and the October 26, 2018 Affidavit by Joanne Hickey-Evans as Exhibit 5B to these proceedings.
- [5] The Tribunal was advised by the City in an email dated November 13, 2018 that the City had received no notice of any objection to the Motion from any circulated party.

- [6] Based on the Affidavits of Joanne Hickey-Evans and the consent of the parties, the Tribunal will grant the Motion giving partial approval to the UHOPA and the ZBA as found in Exhibit 5, Tab A and B respectively.
- [7] The Tribunal's Order is attached.

"Blair S. Taylor"

BLAIR S. TAYLOR MEMBER

If there is an attachment referred to in this document, please visit www.elto.gov.on.ca to view the attachment in PDF format.

Local Planning Appeal Tribunal

A constituent tribunal of Environment and Land Tribunals Ontario Website: www.elto.gov.on.ca Telephone: 416-212-6349 Toll Free: 1-866-448-2248

ATTACHMENT 1

ORDER OF THE TRIBUNAL

THIS MATTER having come before the Tribunal in a written motion filed on August 23, 2018, and having read the affidavit of Joanne Hickey-Evans dated October 26, 2018 to which is appended the annotated version of Urban Hamilton Official Plan Amendment 69, and the annotated version of Zoning By-law 17-240, and having received no objections to the partial approval of either document from any of the parties, THE TRIBUNAL ORDERS AS FOLLOWS:

- 1. The Urban Hamilton Official Plan Amendment 69 (the "UHOPA") came into effect on the day after the last day for filing a notice of appeal, being December 8, 2017, in accordance with the provisions of subsection 17(27) of the *Planning Act*, RSO 1990, c P.13, with the exceptions as shown in Exhibit "A" to the affidavit of Joanne Hickey-Evans, sworn October 26, 2018, and found in Exhibit 5B at Tab A.
- 2. Zoning By-law 17-240 (the "By-law") is deemed to have come into force on the day the By-law was passed, being November 8, 2017, in accordance with subsection 34(31) of the *Planning Act*, with the exceptions as shown in Exhibit "B" to the affidavit of Joanne Hickey-Evans, sworn October 26, 2018 and found in Exhibit 5B at Tab B.
- 3. The coming into effect of certain portions of the By-law shall be strictly without prejudice to, and shall not have the effect of:
 - (a) limiting the resolution of an appellant's appeal;
 - (b) affecting a party's right, to seek to modify, delete or add to the unapproved associated text; or
 - (c) limiting the jurisdiction of the Tribunal to consider and approve modifications, deletions or additions on a general or site-specific basis.

- 4. The coming into effect of certain portions of the By-law is without prejudice to the positions taken by the parties to any site-specific appeal so that if those appeals proceed to a hearing, either on their own or as may be consolidated with other appeals, the City will not take the position that the Tribunal ought not to approve site-specific modifications to the affected sections, tables, definitions, maps, schedules, and associated text, on the basis that they deviate from or are inconsistent with such sections, tables, definitions, maps, schedules, and associated text on a City-wide basis (or as approved in respect of other lands which are subject to the same sections, tables, definitions, maps, schedules, and associated text). However, this does not affect the City's right to assert that the approved sections, tables, definitions, maps, schedules, and associated text should be applied to the specific sites without modification on the basis that they constitute good planning;
- 5. Notwithstanding anything ordered above, the City has not conceded that any portions of the UHOPA or the By-law that have not come into effect or that are not deemed in effect are properly under appeal and the City has reserved the right to bring motions or take any other action to have the breadth and scope of any appeal determined by the Tribunal at a future date.
- 6. Notwithstanding anything ordered above, the Tribunal retains jurisdiction to consider and approve modifications to any policies, schedules, and associated text approved as may be appropriate to dispose of any of the outstanding appeals before the Tribunal, in accordance with section 87 of the *Ontario Municipal Board Act*, RSO 1990, c O.28, which continues to apply in these proceedings as a result of section 1 of O Reg 101/18.
- 7. Any potential settlements may be brought forward for approval by the Tribunal by way of telephone conference call if appropriate in the circumstances upon prior notice and circulation of the information to the parties, scheduling permitting.

This is Exhibit "B" referred to in the affidavit of Joanne Hickey-Evans sworn before me, this 26th day of October, 2018

A Commissioner of Oaths

Jillian Claire Manser, a Commissioner, etc., Province of Ontario, for the City of Hamilton. Expires April 13, 2021.

Authority:

PL171450 - The portions of text shown with yellow highlighting and the lands shown with purple hatching show the portions of the Bylaw that remain under appeal.

Last updated: October 25, 2018

Item 11, Planning Committee Report 17-017 (PED16100(c)) CM: October 25, 2017

Ward: 1, 2, 3, 4, 5, 6, 7, 8, 9,

10, 11, 12, 13, 15 **Bill No. 240**

CITY OF HAMILTON

BY-LAW NO. 17-240

To Amend By-law 05-200 to Create New Commercial and Mixed Use and Utility Zones Utility for the City of Hamilton

WHEREAS the City of Hamilton's new comprehensive Zoning By-law, being By-law No. 05-200, came into force on May 25, 2005;

WHEREAS this By-law represents the seventh stage of the Zoning By-law to create new Commercial and Mixed Use and Utility Zones, amending certain provisions of By-law No. 05-200 and, applying to certain lands located within Wards 1 – 13, and 15 of the City, as hereinafter described and depicted; and,

WHEREAS this By-law conforms with the Urban Hamilton Official Plan upon adoption of Official Plan Amendment No. 69.

NOW THEREFORE the Council of the City of Hamilton enacts as follows:

- 1. That SECTION 1: ADMINISTRATION of By-law No. 05-200 is hereby amended as follows:
- 1.1. That Subsection 1.11 LEGAL NON-CONFORMING USES be amended by deleting the word "and" from clause 1.11b).
- 1.2. That Subsection 1.11 LEGAL NON-CONFORMING USES be amended by adding the following new clauses:
 - "d) Swimming pools, hot tubs, and accessory buildings, including but not limited to sheds, garages and gazebos on a lot containing a single detached or duplex dwelling which is prohibited by the applicable zoning by-law, but which was lawfully used as a single detached or duplex dwelling on the date of the passing of this by-law shall be permitted as follows:
 - i) the location and height complies with the applicable provisions of this by-law; and,
 - ii) this exemption shall not apply to the Open Space and Parks Classification Zones; or,
 - e) In accordance with Subsection 34(10) of the Planning Act, R.S.O., 1990 c.P. 13, as amended, the addition of any porch, deck, balcony, unclosed fire escape or open stair to a single detached or duplex dwelling which is prohibited by this by-law, but which was lawfully used as single detached

(Page 2 of 247)

C5a

C6 C7"

or duplex dwelling on the date of the passing of the by-law, shall be permitted as follows:

- i) the location complies with applicable provisions of this by-law; and,
- ii) this exemption shall not apply to the Open Space and Parks Classification Zones.
- 2. That SECTION 2: INTERPRETATION of By-law No. 05-200 is hereby amended as follows:
- 2.1. That Section 2.1 is amended by adding the following new clause:

Mixed Use Medium Density - Pedestrian

"f) Utility Classification

Focus Zone

g)

<u>Zones</u>	
Parking Zone	U3
Commercial and Mixed Use Classification	
<u>Zones</u>	
Residential Character Commercial Zone	C1
Neighbourhood Commercial Zone	C2
Community Commercial Zone	C3
Mixed Use High Density Zone	C4
Mixed Use Medium Density Zone	C5

- 3. That SECTION 3: DEFINITIONS of By-law No. 05-200 is hereby amended as follows:
- 3.1. That the following new definitions be added:

District Commercial Zone

Arterial Commercial Zone

"Casino	Shall mean a building or structure, or part thereof, in which any activity or game of chance or skill for money as approved by the Province of Ontario or other designated approval authority, and may include accessory restaurants and offices, and shall not include Adult Entertainment Parlour, bingo hall, or Commercial Entertainment.

(Page 3 of 247)

Dwelling Unit in	Shall mean a building used or intended
Conjunction with a	to be used for human habitation but
Commercial Use	shall not include a recreational vehicle
	or tent, and shall be located in the same
	building as a commercial use permitted
	in the zone.
Funeral Home	Shall mean a building or structure or
	part thereof, used for the purpose of
	furnishing funeral supplies and services
	to the public and includes facilities
	intended for the preparation of corpses
	for internment or cremation and may
	include a chapel and a crematorium.
Home Improvement	Shall mean a retail store predominantly
Supply Establishment	selling a focused range of building
	supplies including, but not limited to
	paints, carpets, tiles, bathroom fixtures,
	lighting fixtures and similar products.
Landscaped Parking	Shall mean a curbed portion of land for
Islands	the growing of ornamental shrubs or
	trees, flowers, grass, and other
	vegetation, suitable to the soil and
	climatic conditions of the area of land for
	the purpose of landscaping within a
	parking lot, and shall include walkways,
	fire hydrants, decorative walls or
	features and light standards, and shall
	form part of a Planting Strip or Landscaped Area.
Motor Vehicle	Shall mean a use within a building or
Dealership	structure, or part thereof, where new
Dealership	and/or used motor vehicles are stored or
	displayed for the purpose of sale, rental
	or leasing and may include a building for
	the storage and sale of accessories and
	lubricants for motor vehicles and an
	associated Motor Vehicle Service
	Station.
Motor Vehicle Gas Bar	Shall mean a use on a lot, where fuel or
	lubricants are offered for sale but where
	no provision is made for the repair or
	maintenance of motor vehicles and may
	include the sale of foods and
	convenience items but shall not include
	a Motor Vehicle Service Station or a
	Motor Vehicle Wrecking Establishment.
	mater terrore treetaining motion month

(Page 4 of 247)

Motor Vehicle Washing Establishment Performing Arts Theatre	Shall mean a building or structure or part thereof, used for either the mechanical or manual cleaning or washing of motor vehicles and shall include motor vehicle detailing. Shall mean a building or structure or part thereof, used for the presentation of musical, theatrical, dance, or other live performances and may include lounges, dressing rooms, workshop rooms, storage areas, but shall not include a cinema.
Residential Zone	 i) The residential districts in Hamilton Zoning By-law No. 6593; and, ii) The residential zones in Ancaster Zoning By-law No. 87-57, Town of Dundas Zoning By-law No. 3581-86, Town of Flamborough Zoning By-law No. 90-145-Z, Township of Glanbrook No. 464 and City of Stoney Creek Zoning By-law No. 3692-92.
Shopping Centre	Shall mean one or more buildings, or part thereof, containing a group of four or more separate commercial establishments, catering to the broader shopping customer, comprehensively planned and maintained as a single cohesive and integrated site."

3.2. That the definition of **Amenity Area** be amended:

By deleting the word "residential" between "of" and after "lot", and adding the words "Planting Strip" at the end of the sentence.

3.3. That the definition of **Building and Lumber Supply Establishment** be amended:

By deleting the words "predominantly selling of lumber and a wide range of building and home decorating supplies" and replacing with "and any associated outdoor storage which predominantly sells lumber and a wide range of building and home construction materials".

(Page 5 of 247)

3.4. That the definition of **Commercial Entertainment** be amended:

By removing the word "or" after the word "Arcade" and adding the words "or Casino" after the word "Parlour", and deleting the words "performing arts theatre" before "bingo halls".

3.5. That the definition of **Commercial Recreation** be amended:

By adding the words "indoor and outdoor" before the words "racquet courts".

3.6. That the definition of **Drive-Through Facility** be amended:

By adding the words "and a Motor Vehicle Service Station" after the words "a Motor Vehicle Washing Establishment".

3.7. That the definition of **Hotel** be amended:

By adding the words "but shall not include a Casino" after the word "commercial recreation".

3.8. That the definition of **Motor Vehicle Service Station** be amended:

By deleting the words "the use of land, building, or structure, or part thereof" with "an establishment used for the", and adding the word "and" after the word "accessories".

3.9. That the definition of **Retail** be deleted and replaced with the following definition:

"Retail

Shall mean the sale or rental of goods or materials to the ultimate consumer which shall include but not limited to Building or Contracting Supply Establishment, Building and Lumber Supply Establishment, Home Furnishing Retail Establishment, Home Improvement Supply Establishment, but shall not include a restaurant, farm implement dealership, the sale or rental of motor vehicles and the sale of motor vehicle fuel or major recreational equipment."

- 4. That SECTION 4: GENERAL PROVISIONS of By-law No. 05-200 is hereby amended as follows:
- 4.1. That Subsection 4.8.1 RESIDENTIAL ZONES, DOWNTOWN D5 AND DOWNTOWN D6 ZONES, INSTITUTIONAL ZONES, SETTLEMENT COMMERCIAL, SETTLEMENT INSTITUTIONAL, SETTLEMENT RESIDENTIAL ZONES, AND TRANSIT ORIENTED CORRIDOR ZONES be amended by adding the words "COMMERCIAL AND MIXED USE ZONES" after the words "TRANSIT ORIENTED CORRIDOR ZONES", so that it shall read as follows:

(Page 6 of 247)

- "4.8.1 RESIDENTIAL ZONES, DOWNTOWN D5 AND DOWNTOWN D6 ZONES, INSTITUTIONAL ZONES, SETTLEMENT COMMERCIAL, SETTLEMENT INSTITUTIONAL, SETTLEMENT RESIDENTIAL ZONES TRANSIT ORIENTED CORRIDOR ZONES, AND COMMERCIAL AND MIXED USE ZONES"
- 4.2. That Subsection 4.12 VACUUM CLAUSE be amended by adding the following new clause for provisions to the Commercial and Mixed Use Zones:
 - "f) Commercial and Mixed Use Zones

Appealed by Appellant No. 7 (Canadian Tire Real Estate Limited (CTREL)) respecting Section 4.12 f).

- Notwithstanding any other provisions of this By-law, any lot within the Commercial and Mixed Use Zones of this By-law and the location thereon of any building or structure, existing on the effective date of this By-law, shall be deemed to comply with the regulations for any required setbacks, front yard, façade building length, flankage yard, rear yard, lot width, lot area and building height and are permitted by this By-law.
- ii) In addition to Section 4.12.f)i) and notwithstanding Sections 10.3.3a)ii), 10.4.3a)ii), 10.5.3a)ii) and 10.6.3a)ii), and Sections 10.3.3i) ii) and iii), 10.5.3g) ii) and iii), 10.5a.3g) ii) and iii), and 10.6.3g) ii) and iii), within the lands zoned, Community Commercial (C3) Zone, Mixed Use High Density (C4) Zone, Mixed Use Medium Density (C5) Zone, Mixed Use Medium Density (C5) Zone, or District Commercial (C6) Zone, an addition or alteration to a legally existing commercial building, to a maximum of 10% of the existing Gross Floor Area existing on the date of the passing of the By-law, shall be permitted. Appealed by Appellant No. 9 (Choice Properties Real Estate Investment Trust (CP REIT) and Loblaw Properties Ltd.) respecting Section 4.12 f) ii).
- (iii) In addition to Section 4.12.f)ii), an addition or alteration to an existing building shall be permitted to replace the existing legally established parking spaces prior to the addition provided the minimum legally established parking requirements are exceeded.
- g) Parking Space Size for All Zones
 - i) Notwithstanding any other provisions of this By-law, parking spaces located within any zone and approved after May 25, 2005 and prior to the effective date of this By-law shall be deemed to comply with the regulations for the length and width and are permitted by this Bylaw.
- 4.3. That Subsection 4.18c) TEMPORARY USES be amended by revising the following clause to add the Commercial Mixed Use Zones:

(Page 7 of 247)

- "c) Temporary retailing in a Downtown D1, D2, D3, or D4 Zone, in a Transit Oriented Corridor TOC1, TOC2, or TOC3 Zone, or in a Commercial and Mixed use C1, C2, C3, C4, C5, C5a, C6, and C7 Zone in accordance with the following provisions:"
- 4.4. That Subsection 4.25 DRIVE THROUGH REGULATIONS be amended by adding the following new clauses:
 - "c) Locational specific regulations
 - i) No Drive-Through Facility shall be permitted to locate between any required parking area and the main entrance for the use;
 - ii) No Drive-Through Facility stacking lane shall be permitted between the street and the building, except where other buildings on the same lot occupy the space between the Drive-Through Facility and a street; and,
 - iii) Required stacking spaces shall not be permitted in any aisle providing access to the required parking nor obstruct the ability to access a parking space.
 - iv) No Drive-Through Facility, including the stacking space, and any access driveway or manoeuvring space to provide access to the Drive-Through Facility, shall be permitted less than 12.0 metres from a Residential Zone measured from the property line of the lot containing the Drive-Through Facility abutting a Residential Zone or where the lots are separated by a public street, from the lot line closest to the Residential Zone.
 - d) Where a Landscaped Area occupies the space between a Drive-Through Facility and a Residential Zone or an Institutional Zone property line:
 - i) A minimum 3.0 metre planting strip shall be provided and maintained along that portion of the lot line that abuts a Residential Zone or Institutional Zone property line or lot containing a residential use; and,
 - ii) In addition to Section 4.19, a minimum 1.8 metre solid visual barrier shall be provided and maintained along that portion of the property line that abuts Residential Zone or Institutional Zone property line or a lot containing a residential use."
- 4.5. That Subsection 4.32 REDUCTION IN REGULATIONS RESULTING FROM PUBLIC TRANSIT FACILITIES be added:

"No person shall have deemed to have contravened any provisions of this By-law by reason only to the of the fact that a part or parts of any lot or have been

(Page 8 of 247)

- conveyed, acquired, leased, or placement of easements by the City of Hamilton or the Government of Ontario for the placement of public transit facilities."
- 5. That SECTION 5: PARKING REGULATIONS of By-law 05-200 is hereby amended as follows:
- 5.1. That Subsection 5.1a)ii) be amended by revising the following clause to add I "and Mixed Use Zones" as follows:
 - "Notwithstanding Subsection 5.1a)i), where the provision of parking on the same lot as the use requiring such parking is not possible, or not practical, such parking facilities may be located on another lot within 300.0 metres of the lot containing the use requiring the parking. Such alternate parking shall only be situated in a Commercial and Mixed Use, Industrial or Downtown Zone or within the same zone as the use requiring such parking, and shall be subject to Subsection iii) herein."
- 5.2. That Subsection 5.2b) be deleted and replaced by the following new clauses:
 - (b) Unless permitted by another regulation in this By-law, parking space sizes shall be: Appealed by Appellant No. 6 (2531083 Ontario Inc.), Appellant No. 10 (Hamilton-Halton Homebuilders Association), Appellant No. 12 (LJM Developments Inc.) and Appellant No. 18 (Rose Hamilton Homes Inc.) respecting Section 5.2 b).
 - i) Minimum 3.0 metres in width and 5.8 metres in length;
 - ii) Notwithstanding Subsection i) herein, a minimum 2.8 metres in width and 5.8 metres in length shall be permitted within an above ground or underground parking structure, but shall not apply to an attached or detached garage to a Block Townhouse Dwelling, Duplex Dwelling, Maisonette Dwelling, Semi-Detached Dwelling, Single Detached Dwelling, or Street Townhouse Dwelling.
 - iii) Where a wall, column, or any other obstruction is located abutting or within any parking space within an above ground or underground parking structure, the minimum width of a parking space shall be increased by 0.3 metres.
 - iv) Notwithstanding Subsection i) herein, where 10 or more parking spaces are required on a lot, the minimum parking space size of not more than 10% of such required parking spaces shall be a width of 2.6 metres and a length of 5.5 metres, provided that any such parking space is clearly identified as being reserved for the parking of small cars only.

 Appealed by Appellant No. 11 (King Stuart Developments Inc.) respecting Section 5.2 b) iv).
 - v) Notwithstanding Subsection b) herein, light standards, including the base, located at the intersection of 4 parking spaces shall not be considered as an obstruction."

(Page 9 of 247)

- 5.3. That Subsection 5.2 DESIGN STANDARDS be amended by revising clause Subsection 5.2f) to delete "5.5 metres" and replace it with "5.8 metres".
- 5.4. That Subsection 5.2 DESIGN STANDARDS be amended by renumbering 5.2 x) to 5.2g).
- 5.5. That Subsection 5.2 DESIGN STANDARDS be amended by adding the following new clauses:
 - "h) In addition to Section 5.1 a) v) and Subsection e) herein, the following Planting Strip requirements shall apply to a parking lot in a Commercial and Mixed Use Zone and the Parking (U3) Zone where 50 or more parking spaces are provided on a lot:
 - Landscaped Areas or Landscaped Parking Islands with a minimum combined area of 10% of the area of the parking lot and associated access driveway and manouvering areas shall be provided and maintained;
 - ii) Each Landscaped Area or Landscaped Parking Island shall have a minimum width of 2.8 metres and a minimum area of 10.0 square metres;
 - iii) In addition to Section 5.6, the number of required parking spaces required to accommodate the Landscaped Area or Landscaped Parking Island within the parking lot shall be reduced by the amount needed to accommodate the minimum Landscaped Parking Island requirement as required by Subsection 5.1a)v)i), up to a maximum of 10% of the required parking spaces.
 - i) In addition to Subsection c) herein, the minimum aisle width shall be designed and provided in accordance with the following requirements:

Parking Angle Degree	Aisle Width
0°	3.7 m
15°	3.7 m
30°	3.7 m
45°	4.5 m
60°	5.5 m
75°	6.0 m
90°	6.0 m"

5.6. That Subsection 5.6c) and 5.6e) PARKING SCHEDULES be deleted and replaced with the following clause:

(Page 10 of 247)

"c) Parking Schedule for all Zones, except the Downtown Zones

Appealed by Appellant No. 7 (Canadian Tire Real Estate Limited (CTREL)) and Appellant No. 9 (Choice Properties Real Estate Investment Trust (CP REIT) and Loblaw Properties Limited) respecting Section 5.6 c

Properties Real Estate Investment Trust (CF	REIT) and Lobiaw Properties	Limited) respecting Section 5.6 c).
Column 1	Column 2	
i. Residential Uses		
Single Detached Dwelling,	1 per unit.	
Semi-Detached Dwelling,		
Duplex Dwelling		
Dwelling Unit		
Dwelling Units and Dwelling		
Unit in Conjunction with a		
Commercial Use		
(Commercial and Mixed Use		
(C5) and (C5a) Zones and all		
Transit Oriented Corridor		
(Zones) (By-law 16-264, October 12, 2016)		
(By-law 10-204, October 12, 2010)		
i) Dwelling Units less	0.3 per unit.	
than 50.0 square	0.0 per unit.	
metres in gross floor		
area		
<u>urou</u>		
ii) Dwelling Units	Minimum.	Maximum.
greater than 50.0		
square metres in		
gross floor area		
1 = 3 units	0.3 per unit.	1.25 per unit.
Multiple Dwelling		here a dwelling unit is 50
Street Townhouse Dwelling		oss floor area or less, in
		shall be provided at a
	rate of 0.3 per unit.	
AA W. L. D. W.		
Multiple Dwelling		
(Commercial and Mixed Use		
(C5) and (C5a) Zones and all		
Transit Oriented Corridor		
Zones) (By-law 16-264, October 12, 2016)		
(By-law 10-204, October 12, 2010)		
i) Dwelling Units less	Minimum.	Maximum.
than 50.0 square		
metres in gross floor		

(Page 11 of 247)

Column 1	Column 2		
area			
	0.3 per unit.	1.25 per unit.	
ii) Dwelling Units	Minimum.	Maximum.	
greater than 50.0			
square metres in			
gross floor area 1 – 14 units	0.7 per unit.	1 25 per unit	
15 – 50 units	0.85 per unit.	1.25 per unit. 1.25 per unit.	
51+ units	1.0 per unit.	1.25 per unit.	
OTT UTILES	1.0 per unit.	1.25 per driit.	
Residential Care Facility, Emergency Shelter, Corrections Residence,	1 for each 3 persons accommodated or designed for accommodation.		
(Lodging House, Retirement) (Home)			
ii. Institutional Uses			
Day Nursery	 i) 1 for each 125.0 square metres of gross floor area which accommodates such use. ii) Notwithstanding clause i), no parking shall be required where a Day Nursery is located within an Education Establishment or Place of Worship. (By-law 07-321, November 14, 2007, By-law 10-076, April 14, 2010) 		
Long Term Care Facility (All Zones except Transit) Oriented Corridor Zones)	1 for each 3 patient	beds.	
Long Term Care Facility (Transit Oriented Corridor)	1 for each patient b (By-law 16-264, October		
Place of Worship (All Zones except Transit Oriented Corridor Zones)			
Place of Worship (Transit) Oriented Corridor)	1 for each 16.0 square metres of gross floo area, inclusive of a basement or cellar, to accommodate such use. (By-law 16-264, October 12, 2016)		

(Page 12 of 247)

Column 1	Column 2
Column	Column 2
Hospital	1 for each 100.0 square metres of which gross floor area which accommodates such use.
Social Services Establishment (All Zones except Transit Oriented Corridor Zones)	1 for each 30.0 square metres of gross floor area which accommodates such use. (By-law 07-321, November 14, 2007)
Social Services Establishment (Transit Oriented Corridor Zones)	1 for each 50.0 square metres of gross floor area which accommodates such use. (By-law 16-264, October 12, 2016)
Establishments	
Elementary School	1.25 for each classroom.
Secondary School	3 for each classroom plus 1 for each 7 seat capacity in an auditorium, theatre or stadium.
University, College	5 for each classroom plus 1 for every 7 seat capacity in an auditorium, theatre or stadium or 5 spaces for every classroom plus 1 space for each 23.0 square metres of the gross floor area which accommodates the auditorium, theatre or stadium, whichever results in greater requirement.
Educational Establishment	3 for each classroom plus 1 for each 7 seat capacity in an auditorium, theatre or stadium. (By-law 16-264, October 12, 2016)
iv. Commercial Uses	
Adult Entertainment Parlour	1 for each 20 square metres of gross floor area which accommodates such use.
Agricultural Supply Establishment	1 for each 30 square metres of gross floor area which accommodates retail and 1 for each 100.0 square metres of gross floor area which accommodates warehousing.

(Page 13 of 247)

Column 1	Column 2
- Coramin I	
Bowling Alley	4 for each lane.
<u> </u>	
Building or Contracting	1 for each 30 square metres of gross floor
Supply Establishment	area which accommodates the Office, Retail
	and Showroom component of the use.
	(By-law 10-128, May 26, 2010)
Dividing and Lymphon Cymphy	4 for each 50 assume matrice of group floor
Building and Lumber Supply Establishment	1 for each 50 square metres of gross floor area which accommodates such use.
Establistiment	(By-law 10-128, May 26, 2010)
	(15) law 10 120, May 20, 2010)
Cinema	1 for every 6 persons accommodated for
	such use.
Commercial Motor Vehicle	1 for each 100 square metres of gross floor
Sales, Rental and Service	area which accommodates such use and 2
Establishment	for each service bay.
Commercial School	1 space for each 50 square metres of gross
	floor area in excess of 450 square metres
	which accommodates such use. (By-law 14-238, September 10, 2014)
	(by law 14-250, Ochicinaer 10, 2014)
Conference or Convention	1 for each 30.0 square metres of gross floor
Centre	area, which accommodates such use.
	(By-law 10-128, May 26, 2010)
Courier Establishment	1 for each 30.0 square metres of gross floor
	area which accommodates the Office
	component of the use. (By-law 10-128, May 26, 2010)
	(Dy law 10 120, May 20, 2010)
Driving Range	1.5 for each tee-off pad.
Equipment Sales and	1 for each 100 square metres of gross floor
Service Establishment	area which accommodates such use.
Financial Establishment	1 for each 30.0 square metres of gross floor
	area, which accommodates such use.
	(By-law 10-128, May 26, 2010)
Fitness Club	1 for each 15.0 square metres of gross floor
Turess Club	area which accommodates such use.
	area which accommodates such acc.
Funeral Home	1 for each 20.0 square metres of gross floor
	cash zoro cquaro mode or gross noor

(Page 14 of 247)

Column 1	Column 2	
Johann I	area which accommodates such use.	
	(area which accommodates each acci.	
Golf Course	6 for each hole.	
Home Furnishing Retail	1 for each 50.0 square metres of gross floor	
	area which accommodates such use.	
Home Improvement Supply	1 for each 50.0 square metres of gross floor	
Establishment	area which accommodates such use.	
Hotel	1 for each guest suite.	
	(By-law 07-043, February 15, 2007)	
	(By-law 10-128, May 26, 2010)	
Laboratory	1 for each 50.0 square metres of gross floor	
	area which accommodates such use.	
Main Daniel	46	
Major Recreational	1 for each 100.0 square metres of gross	
Equipment Sales and	floor area which accommodates such use.	
Service Establishment		
NA - Cara	A Consequence (a l'an	
<u>Marina</u>	1 for each boat slip.	
Madical Clinia	4 for each 40 0 covers matrice of green floor	
Medical Clinic	1 for each 16.0 square metres of gross floor	
	(area.) ((By-law 10-128, May 26, 2010)	
	(E) law 10 125, May 25, 2510)	
Mini Golf	1.5 for each hole.	
	The few educations	
Motor Vehicle Dealership	1 for each 100.0 square metres of gross	
weter remove 2 concreting	floor area which accommodates such use	
	and 2 for each service bay.	
Motor Vehicle Gas Bar	1 for each 25.0 square metres of gross floor	
	area which accommodates such use.	
Motor Vehicle Service	4 for each service bay.	
Station	(By-law 07-043, February 15, 2007)	
Motor Vehicle Washing	1 for each 30.0 square metres of gross floor	
Establishment	area and 2 for every manual washing bay.	
Office (All 7)	(1)	
Office (All Zones except	i) 0 where a use is less than 450.0	
Industrial Zones)	square metres in gross floor area; and,	

(Page 15 of 247)

Column 1	Column 2	
COMMIN 1	ii)	1 for each 30.0 square metres of gross floor area which accommodates such use, for that portion of a building that is in excess of 450.0 square metres.
Office (Industrial Zones)	area	r each 30 square metres of gross floor which accommodates such use. aw 07-043, February 15, 2007)
Personal Service	i)	0 where a use is less than 450.0 square metres in gross floor area; and,
	(ii)	1 for each 16.0 square metres of gross floor area which accommodates such use, for that portion of a building that is in excess of 450.0 square metres.
Repair Service	area	reach 30.0 square metres of gross floor which accommodates the Office, ail, and Showroom component of the
Restaurant (All Zones except) Transit Oriented Corridor Zones)	i)	1 for each 8.0 square metres of gross floor area which accommodates such use.
	(By-la	Notwithstanding i), where there are no seats provided for dining purposes a minimum of 3 spaces shall be required. aw 10-128, May 26, 2010)
Restaurant (Transit Oriented Corridor Zones)	(iii)	0 where a use is less than 450.0 square metres in gross floor area; and,
	iv)	1 for each 50.0 square metres of gross floor area which accommodates such use for that portion of a building that is in excess of 450.0 square metres. (By-law 16-264, October 12, 2016)
Retail within a Commercial and Mixed Use Zone	i)	0 where a use is less than 450.0 square metres in gross floor area;
	ii)	1 for each 17.0 square metres any gross floor area between 450.0 square

(Page 16 of 247)

Column 1	Cali	umn 2
	COIL	metres and 4,000.0 square metres;
		and,
		and,
	iii)	1 for each 50.0 square metres of gross
		floor area greater than 4,000.0 square
		metres.
Retail within an Industrial	1 for	r each 20.0 square metres of gross floor
Zone		which accommodates such use.
	(By-la	aw 10-128, May 26, 2010)
Channing Contro (within a		O for loca than 450 0 aguera matros of
Shopping Centre (within a	<u>i)</u>	0 for less than 450.0 square metres of
Commercial and Mixed Use Zone)		gross floor area;
20116)	ii)	1 for each 17.0 square metres of gross
	"")	floor area between 450.0 square
		metres and 4,000.0 square metres;
		and,
	iii)	1 for each 50.0 square metres of gross
		floor area greater than 4,000.0 square
		metres.
Performing Arts Theatre	1 for	reach 10 persons accommodated.
	4.6	1,000
Warehouse		r each 30.0 square metres of gross floor
		a, which accommodates the Office
		ponent of the use. aw 10-128, May 26, 2010)
	(Dy-10	aw 10 120, May 20, 2010)
Other Commercial Uses not	1 for	reach 30.0 square metres of gross floor
Listed Above (All Zones		a, which accommodates such use.
except Transit Oriented		
Corridor Zones)		
Other Commercial Uses not	i)	0 where a use is less than 450.0
Listed Above (Transit)		square metres in gross floor area;
Oriented Corridor Zones)		
	(ii)	1 for each 50.0 square metres of gross
		floor area which accommodates such
		use for that portion of a building that is
	/Dy/	in excess of 450.0 square metres.
		aw 16-264, October 12, 2016)
(By-law 06-166 June 14, 2006: By-l	aw 11/-	IUI Malcil Zo Zuuz Dy-law IU- IZO May Zo
(By-law 06-166, June 14, 2006; By-l 2010 Bylaw 11-276, November 16, 2		

(Page 17 of 247)

Column 1	Column 2
v. Industrial Uses	
Bulk Fuel and Oil Storage	1 for each 30.0 square metres of gross floor area, which accommodates the Office component of the use. (By-law 10-128, May 26, 2010)
Commercial Motor Vehicle Sales, Rental and Service Establishment	1 for each 115.0 square metres of gross floor area, which accommodates such use. (By-law 10-128, May 26, 2010)
Commercial Motor Vehicle Washing Establishment	4 for each service bay. (By-law 10-128, May 26, 2010)
Communications Establishment	1 for each 50.0 square metres of gross floor area, which accommodates such use. (By-law 10-128, May 26, 2010)
Contractor's Establishment	1 for each 115.0 square metres of gross floor area, which accommodates such use. (By-law 10-128, May 26, 2010)
Dry Cleaning Plant	1 for each 115.0 square metres of gross floor area, which accommodates such use. (By-law 10-128, May 26, 2010)
Equipment and Machinery Sales, Rental and Service Establishment	1 for each 100.0 square metres of gross floor area, which accommodates such use. (By-law 10-128, May 26, 2010)
Industrial Administrative Office	1 for each 30.0 square metres of gross floor area, which accommodates such use. (By-law 10-128, May 26, 2010)
Laboratory	1 for each 50.0 square metres of gross floor area, which accommodates such use. (By-law 10-128, May 26, 2010)
Labour Association Hall	1 for each 30 square metres of gross floor area, which accommodates such use. (By-law 10-128, May 26, 2010)
Landscape Contracting Establishment	1 for each 115.0 square metres of gross floor area, which accommodates such use. (By-law 10-128, May 26, 2010)

(Page 18 of 247)

Column 1	Column 2	
Manufacturing	1 for each 30.0 square metres of gross floor area which accommodates the Office component of the use, plus 1 for each 200.0 square metres of gross floor area, which accommodates the remainder of the use. (By-law 10-128, May 26, 2010)	
Motor Vehicle Collision Repair Establishment	1 for each 115.0 square metres of gross floor area, which accommodates such use. (By-law 10-128, May 26, 2010)	
Planned Business Centre within an Industrial Zone, except M4 Zone	1 for each 50.0 square metres of gross floor area.) (By-law 10-128, May 26, 2010)	
Planned Business Centre within an M4 Zone	i) 1 for each 30.0 square metres of gross floor area;	
	(ii) In addition to clause i), where a Restaurant occupies more than 30 percent of the gross floor area of the planned business centre, the specific parking requirement for the Restaurant shall be required in addition to the planned business centre requirement for the remaining gross floor area of the planned business centre; and,	
	iii) In addition to clause i), where a Medical Clinic occupies more than 30 percent of the gross floor area of the planned business centre, the specific parking requirement for the Medical Clinic shall be required in addition to the planned business centre requirement for the remaining gross floor area of the planned business centre. (By-law 10-128, May 26, 2010) (By-law 14-238, September 10, 2014)	
Private Power Generation Facility	1 for each 30.0 square metres of gross floor area which accommodates the Office component of the use. (By-law 10-128, May 26, 2010)	

(Page 19 of 247)

Column 1	Column 2
Repair Service	1 for each 30.0 square metres of gross floor area which accommodates the Office, Retail and Showroom component of the use. (By-law 10-128, May 26, 2010)
(Research and Development) (Establishment within an M1) (Zone)	1 for each 75.0 square metres of gross floor area, which accommodates such use, except for that portion of the building used for laboratory, warehouse or manufacturing uses where 1 for each 115 square metres of gross floor area shall be required. (By-law 07-043 February 15, 2007)
Research and Development (Establishment within an Industrial Zone, except an M1 Zone)	1 for each 50.0 square metres of gross floor area which accommodates such use. (By-law 10-128, May 26, 2010)
Salvage Yard	1 for each 30.0 square metres of gross floor area which accommodates the Office and Retail component of the use. (By-law 10-128, May 26, 2010)
Surveying, Engineering, Planning or Design Business	1 for each 30.0 square metres of gross floor area which accommodates such use. (By-law 10-128, May 26, 2010)
Towing Establishment	1 for each 30.0 square metres of gross floor area which accommodates the Office component of the use. (By-law 10-128, May 26, 2010)
Trade School	1 for each 30.0 square metres of gross floor area which accommodates the Office component of the use. (By-law 10-128, May 26, 2010)
Tradesperson's Shop	1 for each 30.0 square metres of gross floor area which accommodates the Office, Retail and Showroom component of the use. (By-law 10-128, May 26, 2010)
(Transport Terminal)	1 for each 30.0 square metres of gross floor area which accommodates the Office component of the use. (By-law 10-128, May 26, 2010)

(Page 20 of 247)

Column 1	Column 2
Waste Management Facility	1 for each 30.0 square metres of gross floor
	area which accommodates the Office
	component of the use.
	(By-law 10-128, May 26, 2010)
	(By-law 11-276, November 16, 2011)
(Py low 07 042 Echapon 15 2007)	, (By-law 10-128, May 26, 2010), (By-law 11-276,
	i, (by-law 10-126, May 26, 2010), (by-law 11-276,
November 16, 2011)	
vi. Agricultural Uses	
(applies to Urban)	
Area only)	
v iii ou o i ii j	
Aguanonica	1 for each 20.0 square matres of gross floor
Aquaponics	1 for each 30.0 square metres of gross floor
	area which accommodates the Office
	component of the use, plus 1 for each 200.0
	square metres of gross floor area, which
	accommodates the remainder of the use.
Madical manifestana arrassina	4 for each 20 0 covers matrice of gross floor
Medical marihuana growing	1 for each 30.0 square metres of gross floor
and harvesting facility	area which accommodates the Office
	component of the use, plus 1 for each 200.0
	square metres of gross floor area, which
	accommodates the remainder of the use.
Greenhouses	1 for each 20.0 aguers matres of gross floor
Greennouses	1 for each 30.0 square metres of gross floor
	area which accommodates the Office
	component of the use, plus 1 for each 200.0
	square metres of gross floor area, which
	accommodates the remainder of the use.
(By-law No. 14-163, June 25, 2014)	
(2) 1411 1101 11 100, 04110 20, 2011)	
vii Uooo in A1 and A2	
vii. Uses in A1 and A2	
Zones	
Farm Product Supply Dealer	1 for each 30.0 square metres of gross floor
	area which accommodates the Showroom
	component of the use.
	Component of the doc.
17	4.5
Kennel	1 for each 30.0 square metres of gross floor
	area which accommodates the Office and
	Retail component of the use.
Pecidential Care Escility	1 for each 3 persons accommodated or
Residential Care Facility	1 for each 3 persons accommodated or
	designed for accommodation.

(Page 21 of 247)

Column 1	Column 2
Single Detached Dwelling	1 for each dwelling unit.
Uses not listed above	No minimum parking required.
(By-law No. 15-173, July 10, 2015)	

5.7. That Subsection 5.6h) is amended by revising the following clause to add the Commercial Mixed Use Zones, Institutional Zones, and Industrial Zones:

By adding the words "or the Commercial and Mixed Use Zones, Institutional Zone, or the Industrial Zones" after the words "(TOC3) Zone".

5.8. That Subsections 5.6f), g), h), and i) are amended by revising the following clauses to add the Commercial Mixed Use Zones:

By replacing "e)" with "c)".

- 5.9. That Subsections 5.6f), g), h), and i) be renumbered to 5.6e), f), g), and h).
- 5.10. That Subsection 5.7c) BICYCLE PARKING be amended by adding the following new clauses to add the Commercial and Mixed Use Zones:
 - "c) In the Transit Oriented Corridor Zones and Commercial and Mixed Use Zones short term bicycle parking shall be provided and maintained in the minimum quantity specified in accordance with the following requirements:

Column 1: Uses	<u>Column 2:</u> Short Term Spaces
i) Residential Uses	
All TOC and Commercial and Mixed Use Zones	
Multiple Dwelling	5
ii) Commercial Uses	
All Commercial and Mixed Use Zones	
Hotel	None

(Page 22 of 247)

Column 1: Uses	<u>Column 2:</u> Short Term Spaces
Commercial Parking Facility	None
Commercial Recreation	10
All TOC and Commercial and Mixed Use Zones	
Commercial Entertainment	10
Other commercial uses not listed above	5
iii) Institutional Uses	
All TOC Zones and Commercial and Mixed Use (C4) and (C5) Zones	
Educational Establishment	2 for each classroom
All TOC and Commercial and Mixed Use Zones	
Place of Worship	5

5.11. That Subsection 5.7f) is amended by revising the following clause to add the Commercial and Mixed Use Zones:

By adding the words "or the Commercial and Mixed Use Zones" after the words "(TOC3) Zone".

5.12. That Subsection 5.7 BICYCLE PARKING be amended by adding the following new clauses:

(Page 23 of 247)

- "g) Notwithstanding Subsection 5.6 a) and c), for any use within the Commercial and Mixed Use (C4), (C5) and (C5a) Zones, the required motor vehicle parking may be reduced in accordance with the following regulations:
 - 1 motor vehicle space for every 5 long term bicycle spaces is provided and maintained up to a maximum of 10% of the original motor vehicle parking requirement; and,
 - ii) In addition to Subsection 5.12g)i), 1 space for every 15 square metres of gross floor area of locker, change room or shower facilities specifically accessible to all users of the secure long term bicycle spaces is provided and maintained."
- 6. That SECTION 10: COMMERCIAL AND MIXED USE ZONES is added to By-law 05-200 by including the following new subsections:

"10.1 RESIDENTIAL CHARACTER COMMERCIAL (C1) ZONE

Explanatory Note: The C1 Zone is generally located abutting or within the interior of a residential neighbourhood, where permitted commercial and residential uses are intended for residents in the immediate area. Types of built form include one- and two-storey buildings such as converted dwellings and "Main Street" commercial buildings where the scale, height, and bulk, are compatible to the surrounding residential neighbourhood.

No person shall erect, or use any building in whole or in part, or use any land in whole or in part, within a Residential Character Commercial (C1) Zone for any purpose other than one or more of the following uses, or uses accessory thereto. Such erection or use shall also comply with the prescribed regulations:

10.1.1 PERMITTED USES Artist Studio

Day Nursery
Duplex Dwelling
Dwelling Unit(s)
Emergency Shelter

Office

Personal Services Repair Service

Residential Care Facility

Restaurant

Retail

Single Detached Dwelling

10.1.1.1 RESTRICTED USES

In addition to Section 10.1.1, the following uses shall be permitted in accordance with the following restrictions:

(Page 24 of 247)

- i) Emergency Shelter and Residential Care Facility
 - The Maximum Capacity for Residential Care Facility shall be 6 residents.
 - Maximum Capacity for Emergency Shelter shall be 6 residents.
 - 3. Except as provided for in Section 4., herein, every Emergency Shelter or Residential Care Facility shall be situated on a lot having minimum radial а separation distance of 300 metres from any lot line of such lot measured to the lot line of any other lot occupied by a Residential Facility, Care Emergency Shelter, Corrections Residence or Correctional Facility.
 - 4. Where the radial separation distance from the lot line of an Emergency Shelter, Residential Care Facility existing as of the effective date of this By-law, is less than 300 metres to the lot line of any other lot occupied by an existing Residential Care Facility, **Emergency Shelter, Corrections** Residence or Correctional Facility, the existing Residential Care Facility may be expanded or redeveloped to accommodate not more than the permitted number of residents permitted by the Zone in which it is located.

(Page 25 of 247)

10.1.2 PROHIBITED USES

Notwithstanding Section 10.1.1, the following uses are prohibited, even as an accessory use:

Drive-Through Facility
Outdoor Commercial Patio

10.1.3 REGULATIONS

a) Maximum Building Setback from a Street Line 3.0 metres.

- b) Minimum Rear Yard
- 7.5 metres.
- c) Minimum Interior Side Yard
- 1.5 metres, 3.0 metres abutting Residential or Institutional Zone or lot containing a residential use.
- c) Maximum Height
- 11.0 metres.
- d) Maximum Lot Area

500.0 square metres;

e) Visual Barrier Requirement

A visual barrier shall be required along any lot line abutting a Residential Zone, Institutional Zone, Downtown (D5) Zone or Downtown (D6) Zone property line in accordance with the requirements of Section 4.19 of this By-law.

- f) Outdoor Storage
- No outdoor storage of goods, materials, or equipment shall be permitted.
- Notwithstanding Section 10.1.3f)i), the display of goods or materials for retail purposes accessory to a retail use shall only be permitted in the front or flankage yard.

10.1.4 SINGLE DETACHED DWELLING AND DUPLEX REGULATIONS

- a) Yard Abutting Street
- 3.0 metres.

(Page 26 of 247)

- c) Minimum Side Yard 1.5 metres.
- d) Maximum Height 11.0 metres.
- e) Minimum Lot Area i) 330.0 square metres for an interior lot; and,
 - ii) Notwithstanding Subsection 10.1.4i), 360.0 square metres shall be required for a corner lot.
- f) Minimum Lot Width i) 12.0 metres for an interior lot; and,
 - ii) 15.0 metres for a corner lot.

10.1.5 ACCESSORY In accordance with the requirements of Sections 4.8 of this By-law.

10.1.6 PARKING In accordance with the requirements of Section 5 of this By-law.

10.2 NEIGHBOURHOOD COMMERCIAL (C2) ZONE

Explanatory Note: The C2 Zone permits commercial uses intended to serve residents within the surrounding neighbourhood, as well as residential uses. This Zone is found primarily along collector or arterial roads, with the built form ranging from small scale one-storey commercial plazas to the clustering of commercial buildings under 2000 square metres built close to the street. The scale, height, and bulk, are compatible with the surrounding residential neighbourhood.

No person shall erect, or use any building in whole or in part, or use any land in whole or in part, within a Neighbourhood Commercial (C2) Zone for any purpose other than one or more of the following uses, or uses accessory thereto. Such erection or use shall also comply with the prescribed regulations:

10.2.1 PERMITTED USES Artist Studio

Catering Service Commercial School Craftsperson Shop Day Nursery

Dwelling Units in conjunction with a

Commercial Use Emergency Shelter

Financial Éstablishment

(Page 27 of 247)

Medical Clinic
Motor Vehicle Service Station
Office
Personal Services
Repair Services
Restaurant
Retail
Social Services Establishment
Veterinary Service

10.2.1.1 RESTRICTED USES

In addition to Section 10.2.1, the following uses shall be permitted in the accordance with the following restrictions:

- i) Emergency Shelter
 - Maximum Capacity for Emergency Shelter shall be 6 residents.
 - Except as provided for in Section

 herein, every Emergency
 Shelter shall be situated on a lot having a minimum radial separation distance of 300 metres from any lot line of such lot measured to the lot line of any other lot occupied by an Emergency Shelter.
 - 3. Where the radial separation distance from the lot line of an Emergency Shelter existing as of the effective date of this By-law, is less than 300 metres to the lot line of any other lot occupied by an existing Emergency Shelter, the existing Shelter may be expanded or redeveloped to accommodate not more than the permitted number of residents permitted by the Zone in which it is located.
- ii) Restriction of Residential Uses within a Building

(Page 28 of 247)

- 1. Notwithstanding Section 10.2.1, a Dwelling Unit(s) in conjunction with a commercial use shall only be permitted above the ground floor except for access, accessory office and utility areas, and shall not occupy more than 50% of the total gross floor area of all the building(s) within the lot.
- Subsection 1 shall not apply to buildings existing at the date of the passing of the By-law where:
 - A. The ground floor contains a commercial use; and,
 - B. The Minimum Building Height is 9.0 metres.

10.2.2 PROHIBITED USES

Notwithstanding Section 10.2.1, the following uses are prohibited, even as an accessory use:

Commercial Parking Facility Drive-Through Facility

10.2.3 REGULATIONS

- a) Building Setback from a Street Line
- i) Minimum 1.5 metres;
- ii) Maximum 3.0 metres, except where a visibility triangle shall be required for a driveway access; and,
- iii) Section 10.2.3a)ii) shall not apply for any portion of a building that exceeds the requirement of Section 10.2.3i) ii) and iii).
- b) Minimum Rear Yard
- i) 6.0 metres; and,
- ii) 7.5 metres abutting a Residential or Institutional Zone or lot containing a residential use.

(Page 29 of 247)

- c) Minimum Interior Side Yard
- i) 1.5 metres; and,
- ii) 3.0 metres abutting a Residential or Institutional Zone or lot containing a residential use.
- d) Maximum Height

11.0 metres.

e) Maximum Lot Area

5,000.0 square metres.

 f) Maximum Gross Floor Area for an Individual Office 500.0 square metres per unit.

g) Maximum Gross Floor Area for Commercial School on a lot 250.0 square metres.

h) Maximum Gross Floor Area for Commercial Uses on a lot 2,000.0 square metres.

i) Built form for New Development In the case of new buildings constructed after the effective date of this by-law or additions to buildings existing as of the effective date of this by-law:

- Rooftop mechanical equipment shall be located and/or screened from view of any abutting street.
- ii) For an interior lot or a through lot the minimum width of the ground floor façade facing the front lot line shall be greater than or equal to 40% of the measurement of the front lot line.
- iii) For a corner lot the minimum combined width of the ground floor façade facing the front lot line and flankage lot line shall be greater than or equal to 50% of the measurement of all lot lines abutting a street.
- iv) In addition to Section 10.2.3i) ii) andiii), the minimum width of the groundfloor façade facing the front and

(Page 30 of 247)

flankage lot lines shall exclude access driveways and any required yards within a lot line abutting a street.

- v) Notwithstanding Section 10.2.3i) ii) and iii), for commercial development existing at the time of the passing of the By-law, new commercial buildings with a Gross Floor Area of less than 650 square metres shall be permitted.
- vi) No parking, driveways, stacking lanes, or aisles shall be located between a building façade and the front lot line and the flankage lot line.
- vii) A minimum of one principal entrance shall be provided:
 - within the ground floor façade that is set back closest to a street; and,
 - 2. shall be accessible from the building façade with direct access from the public sidewalk.
- viii) A walkway shall be permitted in a Planting Strip where required by the By-law.
- ix) Notwithstanding Section 10.2.3, for properties designated under the Ontario Heritage Act, any alternative building design or building materials approved through the issuance of a Heritage Permit shall be deemed to comply with this Section.
- j) Planting Strip Requirements

Where a property lot line abuts a property lot line within a Residential Zone or an Institutional Zone and not a Laneway, a minimum 1.5 metre wide Planting Strip shall be provided and maintained.

(Page 31 of 247)

k) Visual Barrier Requirement A visual barrier shall be required along any lot line abutting a Residential Zone, Institutional Zone, Downtown (D5) Zone or Downtown (D6) Zone property line in accordance with the requirements of Section 4.19 of this By-law.

- I) Outdoor Storage
- No outdoor storage of goods, materials, or equipment shall be permitted.
- ii) Notwithstanding Section 10.2.3i), the display of goods or materials for retail purposes accessory to a retail use shall only be permitted in a front or flankage yard.

10.2.4 MOTOR VEHICLE SERVICE STATION REGULATIONS

- a) Minimum Yard Abutting a Street
- 4.5 metres.
- b) Minimum Yard for Fuel Pump Islands, Fuel Pumps and Canopies
- 4.5 metres from any lot line.
- c) Minimum Planting Strip Requirements
- 3.0 metre in width shall be required abutting any street line, or Residential Zone or Institutional Zone property line, except for points for ingress and egress.
- 10.2.5 SINGLE DETACHED
 AND DUPLEX
 DWELLINGS
 EXISTING AT THE
 DATE OF THE
 PASSING OF THE
 BY-LAW (October
 2017- specific day to
 be included)
- In addition to Section 4.12f) and in accordance with Section 34(10) of the Planning Act, R.S.O.,1990, c.P.13, an addition or alteration to a single detached or duplex dwelling not permitted by the bylaw but legally existing at the date of the passing of the by-law that increases the volume or size of the interior of the building shall be permitted as follows:
- The increase shall not exceed a maximum of 10% of the Gross Floor Area of the building existing at the date of the passing of the by-law;

(Page 32 of 247)

- ii) Section 10.2.3a)ii) shall not apply; and,
- iii) The existing side yard setbacks are maintained for the addition.
- 10.2.6 ACCESSORY BUILDINGS

In accordance with the requirements of Section 4.8 of this By-law.

10.2.7 PARKING

In accordance with the requirements of Section 5 of this By-law.

10.3 COMMUNITY COMMERCIAL (C3) ZONE

Explanatory Note: The C3 Zone permits local commercial uses intended to serve residents within the surrounding neighbourhoods. Located primarily along collector or arterial roads and within close proximity to residential neighbourhoods, the built form within this Zone generally consists of larger commercial plazas to a maximum of 10,000 square metres.

No person shall erect, or use any building in whole or in part, or use any land in whole or in part, within a Community Commercial (C3) Zone for any purpose other than one or more of the following uses, or uses accessory thereto. Such erection or use shall also comply with the prescribed regulations:

10.3.1 PERMITTED USES Artist Studio

Catering Service
Commercial School

Communications Establishment

Community Garden Craftsperson Shop

Day Nursery

Dwelling Units in conjunction with a

Commercial Use

Emergency Shelter

Financial Establishment

Laboratory Medical Clinic Microbrewery

Motor Vehicle Gas Bar

Motor Vehicle Service Station

Office

Personal Services Repair Service Restaurant

(Page 33 of 247)

Retail
Social Services Establishment
Tradesperson's Shop
Urban Farm
Urban Farmers Market
Veterinary Service

10.3.1.1 RESTRICTED USES

In addition to Section 10.3.1, the following uses shall be permitted in the accordance with the following restrictions:

- i) Emergency Shelter
 - Maximum Capacity for Emergency Shelter shall be 6 residents.
 - 2. Except as provided for in Section 3. herein, every Emergency Shelter shall be situated on a lot having a minimum radial separation distance of 300 metres from any lot line of such lot measured to the lot line of any other lot occupied by an Emergency Shelter.
 - Where the radial separation 3. distance from the lot line of an Emergency Shelter existing as of the effective date of this Bylaw, is less than 300 metres to the lot line of any other lot occupied by an existing Emergency Shelter, the Shelter existing may expanded or redeveloped to accommodate not more than permitted number residents permitted by the Zone in which it is located.
- ii) Restriction of Residential Uses within a Building

(Page 34 of 247)

1. Notwithstanding Section 10.3.1, a Dwelling Unit(s) in conjunction with a commercial use shall only be permitted above the ground floor except for access, accessory office and utility areas, and shall not occupy more than 50% of the total gross floor area of all the building(s) within the lot.

10.3.2 PROHIBITED USES

Appealed by Appellant No. 9 (Choice Properties Real Estate Investment Trust (CP REIT) and Loblaw Properties Ltd.) respecting Section 10.3.2.

Notwithstanding Section 10.3.1, the following uses are prohibited, even as an accessory use:

Commercial Parking Facility

10.3.3 REGULATIONS

a) Building Setback from a Street Line

Appealed by Appellant No. 9 (Choice Properties Real Estate Investment Trust (CP REIT) and Loblaw Properties Ltd.) respecting Section 10.3.3 a).

- i) Minimum 1.5 metres;
- ii) Maximum 4.5 metres, except where a visibility triangle shall be required for a driveway access;
- iii) Notwithstanding Section 10.3.3a)i), 6.0 metres for that portion of a building providing an access driveway to a garage; and,
- iv) Section 10.3.3a)ii) shall not apply for any portion of a building that exceeds the requirement of Section 10.3.3i) ii) and iii).
- b) Minimum Rear Yard
- i) 6.0 metres; and,
- 7.5 metres abutting a Residential or Institutional Zone or lot containing a residential use.
- c) Minimum Interior Side Yard
- i) 1.5 metres; and,
- ii) 3.0 metres abutting a Residential or Institutional Zone or lot containing a residential use.

(Page 35 of 247)

d) Maximum Height

14.0 metres.

e) Maximum Lot Area

10,000.0 square metres.

 f) Maximum Gross Floor Area for an Individual Office

500.0 square metres per unit.

g) Maximum Total Gross Floor Area for Commercial Uses

10,000.0 square metres.

h) Maximum Gross Floor Area for Microbrewery

700.0 square metres.

i) Built form for New Development

Appealed by Appellant No. 9 (Choice Properties Real Estate Investment Trust (CP REIT) and Loblaw Properties Ltd.) respecting Section 10.3.3 i).

In the case of new buildings constructed after the effective date of this by-law or additions to buildings existing as of the effective date of this by-law:

- Rooftop mechanical equipment shall be located and/or screened from view of any abutting street.
- For an interior lot or a through lot the minimum width of the ground floor façade facing the front lot line shall be greater than or equal to 40% of the measurement of the front lot line.
- (iii) For a corner lot the minimum combined width of the ground floor façade facing the front lot line and flankage lot line shall be greater than or equal to 50% of the measurement of all lot lines abutting a street.
- iv) In addition to Section 10.3.3i)ii) and iii), the minimum width of the ground floor façade facing the front and flankage lot lines shall exclude access driveways and any required yards within a lot line abutting a street.

(Page 36 of 247)

- v) Notwithstanding Section 10.3.3i)ii) and iii), for commercial development existing at the time of the passing of the By-law, new commercial buildings with a Gross Floor Area of less than 650 square metres shall be permitted.
- vi) No parking, driveways, stacking lanes, or aisles shall be located between a building façade and the front lot line and flankage lot line.
- vii) A minimum of one principal entrance shall be provided:
 - 1. within the ground floor façade that is set back closest to a street; and,
 - 2. shall be accessible from the building façade with direct access from the public sidewalk.
- viii) A walkway shall be permitted in a Planting Strip where required by the By-law.
- ix) Notwithstanding Section 10.3.3, for properties designated under the Ontario Heritage Act, any alternative building design or building materials approved through the issuance of a Heritage Permit shall be deemed to comply with this Section.
- j) Planting Strip Requirements

Where a property lot line abuts a property lot line within a Residential Zone or an Institutional Zone and not a Laneway, a minimum 1.5 metre wide Planting Strip shall be provided and maintained.

(Page 37 of 247)

k) Visual Barrier Requirement A visual barrier shall be required along any lot line abutting a Residential Zone, Institutional Zone, Downtown (D5) Zone or Downtown (D6) Zone property line in accordance with the requirements of Section 4.19 of this By-law.

- I) Outdoor Storage
- No outdoor storage of goods, materials, or equipment shall be permitted.
- ii) Notwithstanding Section 10.3.3i), the display of goods or materials for retail purposes accessory to a Retail use shall only be permitted in a front or flankage yard.

10.3.4 MOTOR VEHICLE GAS BAR AND MOTOR VEHICLE SERVICE STATION REGULATIONS

- a) Minimum Yard Abutting a Street
- 4.5 metres.
- b) Minimum Yard for Fuel Pump Islands, Fuel Pumps and Canopies
- 4.5 metres from any lot line.
- c) Minimum Planting Strip Requirements
- 3.0 metre in width shall be required abutting any street line, or Residential Zone or Institutional Zone property line, except for points for ingress and egress.
- d) Maximum Gross Floor Area for Accessory Retail Uses to a Motor Vehicle Gas Bar

175.0 square metres.

10.3.5 ACCESSORY BUILDINGS

In accordance with the requirements of Section 4.8 of this By-law.

10.3.6 PARKING

In accordance with the requirements of Section 5 of this By-law.

(Page 38 of 247)

10.3.7	URBAN FARM	In accordance with the requirements Section 4.26 of this By-law.	of
10.3.8	COMMUNITY GARDEN	In accordance with the requirements Section 4.27 of this By-law.	of
10.3.9	URBAN FARMERS MARKET	In accordance with the requirements Section 4.28 of this By-law.	of

10.4 MIXED USE HIGH DENSITY (C4) ZONE

Explanatory Note: The C4 Zone includes large format shopping centres, such as Limeridge Mall, and the Centre on Barton, which are characterized by commercial uses serving a regional market. The blend of uses within this zone includes retail, personal service, institutional, office and residential uses. The built form provides for a comfortable and vibrant pedestrian environment that is compact and transit supportive.

No person shall erect, or use any building in whole or in part, or use any land in whole or in part, within a Mixed Use High Density (C4) Zone for any purpose other than one or more of the following uses, or uses accessory thereto. Such erection or use shall also comply with the prescribed regulations:

10.4.1 PERMITTED USES	Artist Studio
-----------------------	---------------

Beverage Making Establishment

Catering Service

Commercial Entertainment Commercial Parking Facility

Commercial Recreation

Commercial School

Communications Establishment
Conference or Convention Centre

Craftsperson Shop

Day Nursery Dwelling Unit(s) Emergency Shelter

Financial Establishment

Funeral Home

Hotel

Laboratory Lodging House Medical Clinic Microbrewery

Motor Vehicle Gas Bar

Multiple Dwelling

Office

Performing Arts Theatre

Personal Service

(Page 39 of 247)

Place of Assembly
Place of Worship
Repair Service
Residential Care Facility
Restaurant
Retail
Retirement Home
Social Services Establishment
Transportation Depot
Urban Farmer's Market
Veterinary Service

10.4.1.1 RESTRICTED USES

In addition to Section 10.4.1, the following uses shall be permitted in the accordance with the following restrictions:

- i) Emergency Shelter, Lodging House, Place of Worship, Residential Care Facility, Retirement, and Social Services Establishment:
 - Maximum Capacity for Residential Care Facility shall be 50 residents;
 - 2. Except as provided for in Subsection 3. herein, every Emergency Shelter Residential Care Facility shall be situated on a lot having a minimum radial separation distance of 300 metres from any lot line of such lot measured to the lot line of any other lot occupied by Residential Care Facility. Emergency Shelter. Corrections Residence Correctional Facility; and,
 - 3. Where the radial separation distance from the lot line of an Emergency Shelter, or Residential Care Facility existing as of the effective date of this By-law, is less than 300 metres to the lot line of any

(Page 40 of 247)

other lot occupied by an existing Residential Care Facility, Emergency Shelter, Corrections Residence or Correctional Facility. the Residential existing Care Facility may be expanded or redeveloped to accommodate not more than the permitted number of residents permitted by the Zone in which it is located.

- ii) Restriction of Uses within a building:
 - The finished floor elevation of any dwelling unit shall be a minimum of 0.9 metres above grade; and,
 - 2. Notwithstanding 10.4.1.1i) 1., a maximum of one dwelling unit shall be permitted in a basement or cellar.

10.4.2 PROHIBITED USES

 Notwithstanding Section 10.4.1, the following uses are prohibited, except if considered only as an accessory use to another permitted use:

> Community Garden Garden Centre Urban Farm

ii) Notwithstanding Section 10.4.1, a Motor Vehicle Dealership is prohibited, even as an accessory use.

10.4.3 REGULATIONS

- a) Maximum Building Setback from a Street Line
- 4.5 metres, except where a visibility triangle is required for a driveway access; and,

(Page 41 of 247)

- ii) Notwithstanding Section i) above, 6.0 metres for that portion of a building providing an access driveway to a garage.
- b) Minimum Rear Yard
- c) Minimum Interior Side Yard
- d) Building Height

Appealed by Appellant No. 7 (Canadian Tire Real Estate Limited (CRTEL)) respecting Section 10.4.3 d).

7.5 metres.

7.5 metres abutting a Residential or Institutional Zone or lot containing a residential use.

- Minimum 11.0 metre façade height along the street;
- ii) In addition to Section 10.4.3i), any building height above 11.0 metres may be equivalently increased as the yard increases beyond the minimum yard requirement established in Section 10.4.3 b) and c) when abutting a Residential or Institutional Zone, and provide a maximum 20.0 metres setback to any yard; and,
- iii) Maximum 40.0 metres.
- iv) In addition to the definition of Building Height in Section 3: Definitions, any wholly enclosed or partially enclosed amenity area, or any portion of a building designed to provide access to a rooftop amenity area shall be permitted to project above the uppermost point of the building, subject to the following regulations:
 - A. The total floor area of the wholly enclosed or partially enclosed structure (belonging) to an amenity area, or portion of a building (designed) to provide access to a rooftop amenity area does not exceed 10% of the floor area of the storey directly beneath;

(Page 42 of 247)

- B. The wholly enclosed or partially enclosed structure belonging to an amenity area, or portion of a building designed to provide access to a rooftop amenity area shall be setback a minimum of 3.0 metres from the exterior walls of the storey directly beneath; and,
- C. The wholly enclosed or partially enclosed structure belonging to an amenity area, or portion of a building (designed) to provide access to a rooftop amenity area shall not be greater than 3.0 metres in vertical distance from the uppermost point of the building to the uppermost point of the rooftop enclosure.
- e) Maximum Gross Floor Area for Office Building

10,000.0 square metres per individual building.

f) Maximum Gross Floor Area for Microbrewery 700.0 square metres.

g) Built form for New Development

In the case of new buildings constructed after the effective date of this by-law or additions to buildings existing as of the effective date of this by-law:

- Rooftop mechanical equipment shall be located and/or screened from view of any abutting street.
- ii) No parking, stacking lanes, or aisles shall be located between the required building façade and the front lot line and flankage lot line.

(Page 43 of 247)

- iii) A minimum of one principal entrance shall be provided:
 - 1. within the ground floor façade that is set back closest to a street; and,
 - 2. shall be accessible from the building façade with direct access from the public sidewalk.
- iv) A walkway shall be permitted in a Planting Strip where required by the By-law.
- h) Minimum Amenity
 Area for Dwelling Units
 and Multiple Dwellings

On a lot containing more than 10 dwelling units, the following Minimum Amenity Area requirements be provided:

- i) An area of 4.0 square metres for each dwelling unit less than 50 square metres; and,
- ii) An area of 6.0 square metres for each dwelling unit more than 50 square metres.
- iii) In addition to the definition of Amenity Area in Section 3: Definitions, an Amenity Area located outdoors shall be unobstructed and shall be at or above the surface, and exposed to light and air.
- i) Planting Strip Requirements

Where a property lot line abuts a property lot line within a Residential Zone or an Institutional Zone and not a Laneway, a minimum 1.5 metre wide Planting Strip shall be provided and maintained.

j) Visual Barrier Requirement A visual barrier shall be required along any lot line abutting a Residential Zone, Institutional Zone, Downtown (D5) Zone or Downtown (D6) Zone property line in accordance with the requirements of Section 4.19 of this By-law.

(Page 44 of 247)

k) Outdoor Storage

- No outdoor storage of goods, materials, or equipment shall be permitted; and,
- ii) Notwithstanding Section 10.4.3i), the display of goods or materials for retail purposes accessory to a Retail use shall only be permitted in a front or flankage yard.

10.4.4 EMERGENCY SHELTER, LODGING HOUSE, PLACE OF WORSHIP, RESIDENTIAL CARE FACILITY, RETIREMENT HOME AND SOCIAL SERVICES ESTABLISHMENT REGULATIONS

a) Minimum Side and Rear Yard

7.5 metres.

b) Maximum Building Height

22.0 metres.

c) Minimum Landscaped Area

10% of the lot area.

10.4.5 MOTOR VEHICLE GAS BAR REGULATIONS

a) Minimum YardAbutting a Street

4.5 metres.

b) Minimum Yard for Fuel Pump Islands, Fuel Pumps and Canopies 4.5 metres from any lot line.

c) Minimum Planting Strip Requirements 3.0 metre in width shall be required abutting any street line, or Residential Zone or Institutional Zone property line, except for points for ingress and egress.

(Page 45 of 247)

d)	Maximum Gross Floor Area for Accessory Retail Uses to a Motor Vehicle Gas Bar	175.0 square metres.
10.4.6	ACCESSORY BUILDINGS	In accordance with the requirements of Section 4.8 of this By-law.
10.4.7	PARKING	In accordance with the requirements of Section 5 of this By-law.
10.4.8	URBAN FARM	In addition to Section 4.26 of this By-law, an Urban Farm shall only be permitted in the rear yard or on the roof-top of the principle building.
10.4.9	COMMUNITY GARDEN	In addition to Section 4.27 of this By-law, a Community Garden shall only be permitted in the rear yard or on the rooftop of the principle building.
10.4.10	URBAN FARMERS MARKET	In accordance with the requirements of Section 4.28 of this By-law.

10.5 MIXED USE MEDIUM DENSITY (C5) ZONE

Explanatory Note: The C5 Zone is found along collector and arterial roads where the zone permits a range of retail, service, commercial, entertainment, and residential uses serving the surrounding community. The built form encourages an active transit supportive, pedestrian environment that is anchored by single or mixed-use buildings oriented towards the pedestrian realm. Although residential uses are permitted, either as a single or mixed-use, this zone is predominantly commercial.

No person shall erect, or use any building in whole or in part, or use any land in whole or in part, within a Mixed Use Medium Density (C5) Zone for any purpose other than one or more of the following uses, or uses accessory thereto. Such erection or use shall also comply with the prescribed regulations:

10.5.1	PERMITTED USES	Artist Studio	
		Beverage Making Establishment	
		Catering Service	
		Commercial Entertainment	
		Commercial Parking Facility	
		Commercial Recreation	
		Commercial School	
		Communications Establishment	

To Amend By-law 05-200 to Create New Commercial and Mixed Use Zones for the City of Hamilton

(Page 46 of 247)

Conference or Convention Centre

Craftsperson Shop

Day Nursery

Dwelling Unit(s)

Educational Establishment

Emergency Shelter

Financial Establishment

Funeral Home

Hotel

Laboratory

Lodging House

Medical Clinic

Microbrewery

Motor Vehicle Gas Bar

Motor Vehicle Service Station

Motor Vehicle Washing Establishment

Multiple Dwelling

Office

Personal Services

Performing Arts Theatre

Place of Assembly

Place of Worship

Repair Service

Residential Care Facility

Restaurant

Retail

Retirement Home

Social Services Establishment

Tradesperson's Shop

Transportation Depot

Urban Farmers Market

Veterinary Service

10.5.1.1 RESTRICTED USES

In addition to Section 10.5.1, the following uses shall be permitted in accordance with the following restrictions:

- i) Restriction of Uses within a building:
 - The finished floor elevation of any dwelling unit shall be a minimum of 0.9 metres above grade; and,

(Page 47 of 247)

- 2. Notwithstanding 10.5.1.1i) 1., a maximum of one dwelling unit shall be permitted in a basement or cellar.
- ii) Residential Care Facility and Retirement Home:
 - 1. Maximum Capacity for Residential Care Facility is 50 residents.
- iii) Emergency Shelter and Residential Care Facility:
 - 1. Except as provided for in Section 2., herein, every Emergency Shelter or Residential Care Facility shall be situated on a lot having a minimum radial separation distance of 300 metres from any lot line of such lot measured to the lot line of any other lot occupied by a Residential Care Facility, Emergency Shelter, Corrections Residence Correctional Facility; and,

(Page 48 of 247)

2. Where the radial separation distance from the lot line of an Emergency Shelter. Residential Care **Facility** existing as of the effective date of this By-law, is less than 300 metres to the lot line of any other lot occupied by an existing Residential Care Facility, Emergency Shelter, Corrections Residence Correctional Facility, the Residential existing Care Facility may be expanded or redeveloped to accommodate not more than the permitted number of residents permitted by the Zone in which it is located.

10.5.2 PROHIBITED USES

 Notwithstanding Section 10.5.1, the following uses are prohibited, except if considered only as an accessory use to another permitted use:

> Community Garden Garden Centre Urban Farm

ii) Notwithstanding Section 10.5.1, a Motor Vehicle Dealership is prohibited, even as an accessory use.

10.5.3 REGULATIONS

a) Building Setback from a Street Line

Appealed by Appellant No. 9 (Choice Properties Real Estate Investment Trust (CP REIT) and Loblaw Properties Limited) respecting Section 10.5.3 a).

- Minimum 3.0 metres for a building with residential units on the ground floor facing a street;
- ii) Maximum 4.5 metres, except where a visibility triangle is required for a driveway access;

(Page 49 of 247)

- iii) Notwithstanding Section 10.5.3i), a maximum 6.0 metres for that portion of a building providing an access driveway to a garage and
- iv) Section 10.5.3ii) shall not apply for any portion of a building that exceeds the requirement of Section 10.5.3g)ii) and iii).
- b) Minimum Rear Yard

7.5 metres.

- c) Minimum Interior Side Yard
- 7.5 metres abutting a Residential or Institutional Zone or lot containing a residential use.
- d) Building Height

Appealed by Appellant No. 7 (Canadian Tire Real Estate Limited (CTREL)) respecting Section 10.5.3 d).

- Minimum 7.5 metre façade height for any portion of a building along a street line;
- ii) Maximum 22.0 metres; and,
- iii) In addition to Section 10.5.3d)i) and notwithstanding Section 10.5.3d)ii), any building height above 11.0 metres may be equivalently increased as the yard increases beyond the minimum yard requirement established in Section 10.5.3 b) and c) when abutting a Residential or Institutional Zone to a maximum of 22.0 metres.
- In addition to the definition of Building Height in Section 3: Definitions, any wholly enclosed or partially enclosed amenity area, or any portion of a building designed to provide access to a rooftop amenity area shall be permitted to project above the uppermost point of the building, subject to the following regulations:

(Page 50 of 247)

- A. The total floor area of the wholly enclosed or partially enclosed structure belonging to an amenity area, or portion of a building designed to provide access to a rooftop amenity area does not exceed 10% of the floor area of the storey directly beneath;
- B. The wholly enclosed or partially enclosed structure belonging to an amenity area, or portion of a building designed to provide access to a rooftop amenity area shall be setback a minimum of 3.0 metres from the exterior walls of the storey directly beneath; and,
- C. The wholly enclosed or partially enclosed structure belonging to an amenity area, or portion of a building designed to provide access to a rooftop amenity area shall not be greater than 3.0 metres in vertical distance from the uppermost point of the building to the uppermost point of the rooftop enclosure.
- e) Maximum Gross Floor Area for each Office Building

10,000.0 square metres.

f) Maximum Gross Floor Area for Microbrewery 700.0 square metres.

g) Built form for New Development

Appealed by Appellant No. 7 (Canadian Tire Real Estate Limited (CTREL)) and Appellant No. 9 (Choice Properties Real Estate Investment Trust (CP REIT) and Loblaw Properties Limited) respecting Section 10.5.3 g).

In the case of new buildings constructed after the effective date of this by-law or additions to buildings existing as of the effective date of this by-law:

i) Rooftop mechanical equipment shall be located and/or screened from view of any abutting street.)

(Page 51 of 247)

- ii) For an interior lot or a through lot the minimum width of the ground floor façade facing the front lot line shall be greater than or equal to 40% of the measurement of the front lot line.
- (iii) For a corner lot the minimum combined width of the ground floor façade facing the front lot line and flankage lot line shall be greater than or equal to 50% of the measurement of all lot lines abutting a street.
- iv) In addition to Section 10.5.3g)i), ii) and iii), the minimum width of the ground floor façade facing the front and flankage lot lines shall exclude access driveways and any required yards within a lot line abutting a street.
- v) For commercial development existing at the time of the passing of the Bylaw, the Section 10.5.3g)ii) and iii) shall not apply to new commercial buildings subject to the following:
 - 1. The maximum Gross Floor Area of each building shall be 650 square metres; and,
 - 2. Notwithstanding Section (10.5.3d)i), the minimum building height shall be 6.0 metres.
- vi) No parking, stacking lanes, or aisles shall be located between the required building façade and the front lot line and flankage lot line.

(Page 52 of 247)

- vii) A minimum of one principal entrance shall be provided:
 - 1. within the ground floor façade that is set back is closest to a street; and,
 - 2. shall (be) (accessible) (from) (the building façade with direct access (from the public sidewalk.)
- viii) A walkway shall be permitted in a Planting Strip where required by the By-law.
- ix) Notwithstanding Section 10.5.3, for properties designated under the Ontario Heritage Act, any alternative building design or building materials approved through the issuance of a Heritage Permit shall be deemed to comply with this Section.
- h) Minimum Amenity
 Area for Dwelling Units
 and Multiple Dwellings

On a lot containing more than 10 dwelling units, the following Minimum Amenity Area requirements be provided:

- i) An area of 4.0 square metres for each dwelling unit less than 50 square metres; and,
- ii) An area of 6.0 square metres for each dwelling unit more than 50 square metres.
- iii) In addition to the definition of Amenity Area in Section 3: Definitions, an Amenity Area located outdoors shall be unobstructed and shall be at or above the surface, and exposed to light and air.
- i) Planting Strip Requirements

Where a property lot line abuts a property lot line within a Residential Zone or an Institutional Zone and not a Laneway, a minimum 1.5 metre wide Planting Strip shall be provided and maintained.

(Page 53 of 247)

j) Visual Barrier Requirement A visual barrier shall be required along any lot line abutting a Residential Zone, Institutional Zone, Downtown (D5) Zone or Downtown (D6) Zone property line in accordance with the requirements of Section 4.19 of this By-law.

k) Outdoor Storage

- No outdoor storage of goods, materials, or equipment shall be permitted; and,
- ii) Notwithstanding Section 10.5.3k)i), the display of goods or materials for retail purposes accessory to a Retail use shall only be permitted in a front or flankage yard.

10.5.4 EMERGENCY
SHELTER, LODGING
HOUSE, PLACE OF
WORSHIP,
RESIDENTIAL CARE
FACILITY,
RETIREMENT HOME
AND SOCIAL
SERVICES
ESTABLISHMENT
REGULATIONS

a) Minimum Side and Rear Yard:

7.5 metres.

b) Maximum Building Height:

22.0 metres.

c) Minimum Landscaped Area:

10% of the total Lot Area.

10.5.5 MOTOR VEHICLE
GAS BAR AND
MOTOR VEHICLE
SERVICE STATION
REGULATIONS

a) Minimum YardAbutting a Street

4.5 metres.

(Page 54 of 247)

b)	Minimum Yard for Fuel		
	Pump Islands, Fuel		
	Pumps and Canopies		

4.5 metres from any lot line.

c) Minimum Planting Strip Requirements 3.0 metre in width shall be required abutting any street line, or Residential Zone or Institutional Zone property line, except for points for ingress and egress.

d) Maximum Gross Floor Area for Accessory Retail Uses to a Motor Vehicle Gas Bar 175.0 square metres.

10.5.6 SINGLE DETACHED
AND DUPLEX
DWELLINGS
LEGALLY EXISTING
AT THE DATE OF
THE PASSING OF
THE BY-LAW
(October 2017specific day to be
included)

In addition to Section 4.12f) and in accordance with subsection 34(10) of the Planning Act, R.S.O.,1990, c.P.13, an addition or alteration to a single detached or duplex dwelling not permitted by the bylaw but legally existing at the date of the passing of the by-law that increases the volume or size of the interior of the building shall be permitted as follows:

- The increase shall not exceed a maximum of 10% of the Gross Floor Area of the building existing at the date of the passing of the by-law;
- ii) Section 10.5.3a)ii) and iii) and d)i) shall not apply; and,
- iii) The existing side yard setbacks are maintained for the addition.

10.5.7 ACCESSORY BUILDINGS

In accordance with the requirements of Section 4.8 of this By-law.

10.5.8 PARKING

In accordance with the requirements of Section 5 of this By-law.

10.5.9 URBAN FARM

In addition to Section 10.5.2i), and in addition to the requirements of Section 4.26 of this By-law, an Urban Farm shall only be permitted in the rear yard or on the roof-top of the principle building.

(Page 55 of 247)

10.5.10 COMMUNITY GARDEN

In addition to Section 4.27 and 10.5.2 i) of this By-law, a Community Garden shall only be permitted in the rear yard or on the roof-top of the principle building.

10.5.11 URBAN FARMERS MARKET

In accordance with the requirements of Section 4.28 of this By-law.

10.5a MIXED USE MEDIUM DENSITY – PEDESTRIAN FOCUS (C5a) ZONE

Explanatory Note: The C5a Zone is typically located along pedestrian oriented streets where permitted commercial and residential uses create an active and vibrant pedestrian realm. Built form consists of buildings with only commercial uses at-grade and residential, commercial and limited institutional uses on the upper floors to encourage a pedestrian and transit-supportive environment. The range of permitted commercial uses along with their built form, are intended to meet the needs of residents and visitors while creating an inviting pedestrian environment.

No person shall erect, or use any building in whole or in part, or use any land in whole or in part, within a Mixed Use Medium Density – Pedestrian Focus (C5a) Zone for any purpose other than one or more of the following uses, or uses accessory thereto. Such erection or use shall also comply with the prescribed regulations:

10.5a.1 PERMITTED USES

Artist Studio

Beverage Making Establishment

Catering Service

Commercial Entertainment Commercial Parking Facility

Commercial Recreation

Commercial School

Communications Establishment

Craftsperson Shop

Day Nursery

Dwelling Units in conjunction with a

Commercial Use

Financial Establishment

Hotel

Laboratory

Medical Clinic

Microbrewery

Office

Performing Arts Theatre

Personal Services

Place of Assembly

Place of Worship

Repair Service

Restaurant

(Page 56 of 247)

Retail Social Services Establishment Urban Farmers Market Veterinary Service

10.5a.1.1 RESTRICTED USES

In addition to Section 10.5a.1, the following uses shall be permitted in accordance with the following restrictions:

- i) Uses Permitted on Ground Floor:
 - 1. Notwithstanding 10.5a.1, the following uses shall only be permitted within the ground floor of a building:

Beverage Making Establishment Catering Service Commercial Entertainment Commercial Recreation Microbrewery

- ii) Uses Permitted Above Ground Floor:
 - 1. Notwithstanding 10.5a.1, the following uses, excluding access areas, accessory office and utility areas, shall not be permitted on the ground floor in a building containing more than one non-residential use:

Day Nursery
Place of Worship

2. Notwithstanding Section 10.5a.1, a Dwelling Unit(s) in conjunction with a commercial use shall only be permitted above the ground floor except for access, accessory office and utility areas.

(Page 57 of 247)

iii) Commercial Parking Facility:

1. Notwithstanding Section 10.5a.1, a Commercial Parking Facility, excluding access driveway(s) shall only be permitted if wholly contained within a building and shall not be permitted on the first storey.

10.5a.2 PROHIBITED USES

 Notwithstanding Section 10.5a.1, the following uses are prohibited, except if considered only as an accessory use to another permitted use:

> Community Garden Garden Centre Urban Farm

ii) Notwithstanding Section 10.5a.1, a Drive-Through Facility is prohibited, even as an accessory use.

10.5a.3 REGULATIONS

- a) Maximum Building Setback from a Street Line
- 3.0 metres for the first storey, but except where a visibility triangle is required for a driveway setback;
- ii) Notwithstanding Section 10.5a.3i),6.0 metres for that portion of a building providing an access driveway to a parking garage; and,
- iii) Section 10.5a.3ii) shall not apply for any portion of a building that exceeds the requirement of Section10.5a.3 h)ii) and iii).
- b) Minimum Rear Yard 7.5 metres.
- c) Minimum Side Yard 7.5 metres abutting a Residential or Institutional Zone or lot containing a residential use.

(Page 58 of 247)

- d) Building Height
- Minimum 7.5 metre façade height for any portion of a building along a street line;
- ii) Maximum 22.0 metres; and,
- In addition to Section 10.5a.3i), and iii) notwithstanding Section 10.5a.3ii), any building height above 11.0 be equivalently metres may increased as the yard increases beyond the minimum yard requirement established in Section 10.5a.3b) and c) when abutting a Residential or Institutional Zone to a maximum of 22.0 metres.
- iv) In addition to the definition of Building Height in Section 3: Definitions, any wholly enclosed or partially enclosed amenity area, or any portion of a building designed to provide access to a rooftop amenity area shall be permitted to project above the uppermost point of the building, subject to the following regulations:
 - A. The total floor area of the wholly enclosed or partially enclosed structure belonging to an amenity area, or portion of a building designed to provide access to a rooftop amenity area does not exceed 10% of the floor area of the storey directly beneath;
 - B. The wholly enclosed or partially enclosed structure belonging to an amenity area, or portion of a building designed to provide access to a rooftop amenity area shall be setback a minimum of 3.0 metres from the exterior walls of the storey directly beneath; and,

(Page 59 of 247)

- C. The wholly enclosed or partially enclosed structure belonging to an amenity area, or portion of a building designed to provide access to a rooftop amenity area shall not be greater than 3.0 metres in vertical distance from the uppermost point of the building to the uppermost point of the rooftop enclosure.
- e) Maximum Gross Floor Area for Office Use
- 2,500.0 square metres.
- f) Maximum Gross Floor Area for Commercial Recreation
- 2,500.0 square metres.
- g) Maximum Gross Floor Area for Microbrewery

700.0 square metres.

h) Built form for New Development

In the case of new buildings constructed after the effective date of this by-law or additions to buildings existing as of the effective date of this by-law:

- Rooftop mechanical equipment shall be located and/or screened from view of any abutting street.
- ii) For an interior lot or through lot the minimum width of the ground floor façade facing the front lot line shall be greater than or equal to 75% of the measurement of the front lot front line.
- iii) For a corner lot the minimum combined width of the ground floor façade facing the front lot line and flankage lot line shall be greater than or equal to 50% of the measurement of all lot lines abutting a street.

(Page 60 of 247)

- iv) In addition to Section 10.5a.3i) ii) and iii), the minimum width of the ground floor façade facing the front lot line shall exclude access driveways and required yard along a lot line abutting a street.
- v) No parking, stacking lanes, or aisles shall be located between the required building façade and the front lot line and flankage lot line.
- vi) A minimum of one principal entrance shall be provided:
 - within the ground floor façade that is set back closest to a street; and,
 - 2. shall be accessible from the building façade with direct access from the public sidewalk.
- vii) A walkway shall be permitted in a Planting Strip where required by the By-law.
- viii) Notwithstanding Section 10.5a.3, for properties designated under the Ontario Heritage Act, any alternative building design or building materials approved through the issuance of a Heritage Permit shall be deemed to comply with this Section.
- ix) A minimum of 60% of the area of the ground floor façade facing the street shall be composed of doors and windows.
- x) The first storey shall have a minimum height of 3.6 metres and a maximum height of 4.5 metres.

(Page 61 of 247)

i) Planting Strip Requirements Where a property lot line abuts a property lot line within a Residential Zone or an Institutional Zone and not a Laneway, a minimum 1.5 metre wide Planting Strip shall be provided and maintained.

j) Visual Barrier Requirement A visual barrier shall be required along any lot line abutting a Residential Zone, Institutional Zone, Downtown (D5) Zone or Downtown (D6) Zone property line in accordance with the requirements of Section 4.19 of this By-law.

k) Outdoor Storage

- No outdoor storage of goods, materials, or equipment shall be permitted; and,
- ii) Notwithstanding Section 10.5a.3i), the display of goods or materials for retail purposes accessory to a Retail use shall only be permitted in a front or flankage yard.

10.5a.5 SINGLE DETACHED
AND DUPLEX
DWELLINGS
LEGALLY EXISTING
AT THE DATE OF
THE PASSING OF
THE BY-LAW
(October 2017specific day to be
included)

In addition to Section 4.12f) and in accordance with subsection 34(10) of the Planning Act, R.S.O.,1990, c.P.13, an addition or alteration to a single detached or duplex dwelling not permitted by the by-law but legally existing at the date of the passing of the by-law that increases the volume or size of the interior of the building shall be permitted as follows:

- The increase shall not exceed a maximum of 10% of the Gross Floor Area of the building existing at the date of the passing of the by-law;
- ii) Section 10.5a.3.a) and d)i) shall not apply; and,
- iii) The existing side yard setbacks are maintained for the addition.

10.5a.6 ACCESSORY BUILDINGS

In accordance with the requirements of Section 4.8 of this By-law.

To Amend By-law 05-200 to Create New Commercial and Mixed Use Zones for the City of Hamilton

(Page 62 of 247)

а

10.5a.7	PARKING	In accordance with the requirements of Section 5 of this By-law.
10.5a.8	URBAN FARM	In addition to Section 10.5a.2, and the requirements of Section 4.26 of this Bylaw, an Urban Farm shall only be permitted in the rear yard or on the rooftop of the principle building.
10.5a.9	COMMUNITY GARDEN	In addition to Section 4.27 and 10.5a.2 of this By-law, a Community Garden shall only be permitted in the rear yard or on the roof of the principle building.
10.5a.10	URBAN FARMERS MARKET	In accordance with the requirements of Section 4.28 of this By-law.

10.6 DISTRICT COMMERCIAL (C6) ZONE

Explanatory Note: The C6 Zone permits retail and service commercial uses which cater to the weekly and daily shopping needs of residents in the immediate and surrounding neighbourhoods. Retail shops and services may be clustered in a plaza form along collector and arterial roads where an enhanced street presence is provided by bringing buildings closer to the street. Residential uses are permitted but the intent of the zone is predominantly commercial use.

No person shall erect, or use any building in whole or in part, or use any land in whole or in part, within a District Commercial (C6) Zone for any purpose other than one or more of the following uses, or uses accessory thereto. Such erection or use shall also comply with the prescribed regulations:

10.6.1	PERMITTED USES	Artist Studio
		Beverage Making Establishment
		Catering Service
		Commercial Entertainment
		Commercial Parking Facility
		Commercial Recreation
		Commercial School
		Communications Establishment
		Community Garden
		Conference or Convention Centre
		Craftsperson Shop
		Day Nursery
		Dwelling Units in conjunction with
		Commercial Use
		Financial Establishment

To Amend By-law 05-200 to Create New Commercial and Mixed Use Zones for the City of Hamilton

(Page 63 of 247)

Funeral Home

Hotel

Laboratory

Medical Clinic

Motor Vehicle Gas Bar

Motor Vehicle Rental Establishment

Motor Vehicle Service Station

Motor Vehicle Washing Establishment

Office

Personal Service

Place of Assembly

Repair Service

Restaurant

Retail

Social Services Establishment

Transportation Depot

Urban Farm

Urban Farmers Market

Veterinary Service

10.6.1.1 RESTRICTED USES

In addition to Section 10.6.1, the following uses shall be permitted in the accordance with the following restrictions:

- i) Restriction of Uses within a Building:
 - 1. Notwithstanding Section 10.6.1, for building(s) with a gross floor area of less than 4,650 square metres, a Dwelling Unit(s) in conjunction with a commercial use shall only be permitted above the ground floor except for access, accessory office and utility areas, and shall not occupy more than 50% of the total gross floor area of all the building(s) within the lot. For buildings with a gross floor area of 4,650 square metres or more, a Dwelling Unit(s) in conjunction with a commercial use shall only be permitted above the ground floor except for access, accessory office and utility areas

(Page 64 of 247)

 Notwithstanding Section 10.6.1, an Office(s) shall only be permitted above the ground floor.

10.6.2 PROHIBITED USES

Notwithstanding Section 10.6.1, the following uses are permitted only as an accessory use:

Garden Centre Motor Vehicle Sales and Service Establishment

10.6.3 REGULATIONS

a) Building Setback from a Street Line

Appealed by Appellant No. 9 (Choice Properties Real Estate Investment Trust (CP REIT) and Loblaw Properties Limited) respecting Section 10.6.3 a).

- i) Minimum 1.5 metres;
- Maximum 4.5 metres, except where a visibility triangle is required for a driveway access;
- iii) Notwithstanding Section 10.6.3i), 6.0 metres for that portion of a building providing an access driveway to a garage; and,
- iv) Section 10.6.3i) shall not apply for any portion of a building that exceeds the requirement of Section 10.6.3 g) ii) and iii).
- b) Minimum Rear Yard
- i) 6.0 metres; and,
- ii) 7.5 metres abutting a Residential or Institutional Zone or lot containing a residential use.
- c) Minimum Interior Side Yard
- i) 1.5 metres; and,
- 4.5 metres abutting a Residential or Institutional Zone or lot containing residential use.

d) Maximum Height

14.0 metres.

(Page 65 of 247)

e) Maximum Gross Floor Area for Office Use 2,000.0 square metres.

f) Maximum Gross Floor Area for Individual Commercial Use 10,000.0 square metres per individual commercial use.

g) Built form for New Development

Appealed by Appellant No. 9 (Choice Properties Real Estate Investment Trust (CP REIT) and Loblaw Properties Limited) respecting Section 10.6.3 g). In the case of new buildings constructed after the effective date of this by-law or additions to buildings existing as of the effective date of this by-law:

- Rooftop mechanical equipment shall be located and/or screened from view of any abutting street;
- ii) For an interior lot or a through lot the minimum width of the ground floor façade facing the front lot line shall be greater than or equal to 40% of the measurement of the front lot line and shall exclude access driveways and lands within a required yard.
- iii) For a corner lot the width of the ground floor façade facing a front lot line and flankage lot line shall be greater than or equal to 50% of the measurement of all lot lines abutting a street and shall exclude access driveways and lands within a required yard.
- iv) In addition to Section 10.6.3i) ii) and iii), the minimum width of the ground floor façade facing the front and flankage [lot lines shall exclude access driveways and any required yards within a lot line abutting a street.

(Page 66 of 247)

- v) Notwithstanding Section 10.6.3g) ii) and iii), for commercial development existing at the time of the passing of the By-law, new commercial buildings with a Gross Floor Area of less than 650 square metres shall be permitted.
- vi) No parking, stacking lanes, or aisles shall be located between a building façade and the front lot line and flankage lot line;

 Appealed by Appellant No. 5 (2294643 Ontario Inc.)

Appealed by Appellant No. 5 (2294643 Ontario Inc.) respecting Section 10.6.3 g) vi).

- vii) A minimum of one principal entrance shall be provided:
 - 1. within the ground floor façade that is set back is closest to a street; and,
 - 2. shall be accessible from the building façade with direct access from the public sidewalk; and,

Appealed by Appellant No. 5 (2294643 Ontario Inc.) respecting Section 10.6.3 g) vii).

- viii) A walkway shall be permitted in a Planting Strip where required by the By-law.
- h) Planting Strip Requirements

Where a property lot line abuts a property lot line within a Residential Zone or an Institutional Zone and not a Laneway, a minimum 1.5 metre wide Planting Strip shall be provided and maintained.

i) Visual Barrier Requirement A visual barrier shall be required along any lot line abutting a Residential Zone, Institutional Zone, Downtown (D5) Zone or Downtown (D6) Zone property line in accordance with the requirements of Section 4.19 of this By-law.

j) Outdoor Storage

 No outdoor storage of goods, materials, or equipment shall be permitted; and,

(Page 67 of 247)

ii) Notwithstanding Section 10.6.3j)i), the display of goods or materials for retail purposes accessory to a Retail use shall only be permitted in a front or flankage yard.

10.6.4 MOTOR VEHICLE GAS BAR AND MOTOR VEHICLE SERVICE STATION REGULATIONS

- a) Minimum Building Setback from a Street Line
- 4.5 metres;
- b) Minimum Yard for Fuel Pump Islands, Fuel Pumps and Canopies
- 4.5 metres from any lot line.
- c) Minimum Planting Strip Requirements
- 3.0 metre in width shall be required abutting any street line, or Residential Zone or Institutional Zone property line, except for points for ingress and egress.
- d) Maximum Gross Floor Area for Accessory Retail Uses to a Motor Vehicle Gas Bar

175.0 square metres.

10.6.5 ACCESSORY BUILDINGS

In accordance with the requirements of Section 4.8 of this By-law.

10.6.6 PARKING

In accordance with the requirements of Section 5 of this By-law.

10.6.7 URBAN FARM

In accordance with the requirements of Section 4.26 of this By-law.

10.6.8 COMMUNITY GARDEN

In accordance with the requirements of Section 4.27 of this By-law.

10.6.9 URBAN FARMERS MARKET

In accordance with the requirements of Section 4.28 of this By-law.

(Page 68 of 247)

10.7 ARTERIAL COMMERCIAL (C7) ZONE

Explanatory Note: The C7 Zone permits large-format commercial uses catering to the travelling public and in turn, the built form is reflective through the presence of large buildings. The uses found within the C7 Zone are typically land intensive which may require outdoor storage and sales areas.

No person shall erect, or use any building in whole or in part, or use any land in whole or in part, within an Arterial Commercial (C7) Zone for any purpose other than one or more of the following uses, or uses accessory thereto. Such erection or use shall also comply with the prescribed regulations:

10.7.1 **PERMITTED USES**

Building or Contracting Supply

Establishment

Building and Lumber Supply

Establishment

Commercial Entertainment

Commercial Motor Vehicle Sales. Rental

and Service Establishment

Commercial Parking Facility

Commercial Recreation

Community Garden

Conference or Convention Centre

Equipment and Machinery Sales, Rental

and Service Establishment

Farm Product Supply Dealer

Funeral Home

Garden Centre

Home Furnishing Retail Establishment

Home Improvement Supply

Establishment

Hotel

Major Recreational Equipment Sales,

Rental and Service Establishment

Motor Vehicle Dealership

Motor Vehicle Gas Bar

Motor Vehicle Parts and Accessory Sales

Establishment

Motor Vehicle Rental Establishment

Motor Vehicle Service Station

Motor Vehicle Washing Establishment

Place of Assembly

Repair Service

Restaurant

Surveying, Engineering, Planning or

Design Business

(Page 69 of 247)

Transportation Depot Warehouse

10.7.2 PROHIBITED USES

Notwithstanding Section 10.7.1, the following uses are prohibited even as an accessory use:

Dwelling Unit(s)
Performing Arts Theatre
Cinema

10.7.3 REGULATIONS

a) Minimum Building Setback to a Street Line 18.0 metres.

- b) Minimum Rear Yard
- i) 6.0 metres; and,
- 7.5 metres abutting a Residential or Institutional Zone or lot containing a residential use.
- c) Minimum Interior Side Yard
- i) 1.5 metres; and,
- 4.5 metres abutting a Residential or Institutional Zone or lot containing a residential use.
- d) Maximum Height

14.0 metres.

e) Visual Barrier Requirement

A visual barrier shall be required along any lot line abutting a Residential Zone or Institutional Zone property line in accordance with the requirements of Section 4.19 of this By-law.

f) Planting Strip Requirements Where a property lot line abuts a property lot line within a Residential Zone or an Institutional Zone and not a Laneway, a minimum 1.5 metre wide Planting Strip shall be provided and maintained.

- g) Outdoor Storage
- The display of goods or materials for retail purposes accessory to a Retail use shall only be permitted on the

(Page 70 of 247)

front, side, and rear yard;

- ii) Notwithstanding 10.7.3g)i), an outdoor storage area shall not be located on a planting strip, or required parking or loading area;
- An Outdoor storage area shall be iii) located 6.0 metres from а Residential or Institutional Zone or lot containing a residential use, or from a lot line fronting onto a street, and shall be screened or fenced from view; and,
- An outdoor storage area attached to iv) a building shall not exceed 500 square metres, or an area equivalent to 5% of the Gross Floor Area. whichever is lesser.

10.7.4 MOTOR VEHICLE **GAS BAR AND MOTOR VEHICLE SERVICE STATION** REGULATIONS

- a) Minimum Yard Abutting a Street
- 4.5 metres.
- b) Minimum Yard for Fuel 4.5 metres from any lot line. Pump Islands, Fuel Pumps and Canopies
- c) Minimum Planting Strip Requirements
- 3.0 metre in width shall be required abutting any street line, or Residential Zone or Institutional Zone property line, except for points for ingress and egress.
- d) Maximum Gross Floor Area for Accessory Retail Uses to a Motor Vehicle Gas Bar

175.0 square metres.

ACCESSORY 10.7.5 BUILDINGS

In accordance with the requirements of Section 4.8 of this By-law.

(Page 71 of 247)

10.7.6	PARKING	In accordance with the requirements of Section 5 of this By-law.
10.7.7	DRIVE-THROUGH FACILITY REGULATIONS	In accordance with the requirements of Section 4.25 of this By-law.
10.7.8	URBAN FARM	In accordance with the requirements of Subsection 4.26 of this By-law.
10.7.9	COMMUNITY GARDEN	In accordance with the requirements of Subsection 4.27 of this By-law."

7. That SECTION 12: UTILITY ZONES is added to By-law 05-200 is hereby amended by adding the following new subsection:

"13.3 PARKING (U3) ZONE

Explanatory Note: The U3 Zone is for parking purposes such as a municipal parking lot or a private parking lot either as a surface lot or structured parking. An Urban Farmer's Market is also permitted in the U3 Zone.

No person shall erect, or use any building in whole or in part, or use any land in whole or in part, within a Parking (U3) Zone for any purpose other than one or more of the following uses, or uses accessory thereto. Such erection or use shall also comply with the prescribed regulations:

13.3.1	PERMITTED USES	Commercial Parking Facility
		Parking Lot
		Urban Farmers Market

13.3.2

.2	REGULATIONS		
a)	Building Setback from a Street Line	i)	Minimum 1.5 metres;
		ii)	3.0 metres for the first storey, but except where a visibility triangle is required for a driveway setback;
b)	Minimum Rear Yard	Resid	netres, except 7.5 metres abutting a ential or Institutional Zone or lot ining a residential use.
c)	Minimum Interior Side Yard		netres, except 7.5 metres abutting a ential or Institutional Zone or lot

containing a residential use.

(Page 72 of 247)

d) Maximum Height 11.0 metres

e) Minimum Distance of 7.0 metres Parking Gate from Street

f) Minimum distance of 7.0 metres on and off ramps from street line

g) Planting Strip Requirements Minimum 3.0 metre wide Planting Strip shall be provided and maintained along all rear and interior side lot lines abutting a Residential or Institutional Zone or lot containing a residential use except for points of ingress and egress.

h) Lighting Requirements

Every lighting facility shall be so designed. installed and maintained to ensure light is deflected away from a Residential Zone, Institutional Zone, Downtown (D5) Zone or Downtown (D6) Zone, Transit Oriented Corridor Zones, Residential Character Commercial (C1) Zone, Mixed Use High (C4) Zone, Mixed Use Medium (C5) Zone, or the Mixed Use Medium Pedestrian Focus (C5a) Zone.

i) Visual Barrier Requirement

A visual barrier shall be required along any side or rear lot line abutting a Residential Zone, Institutional Zone, Downtown (D5) Zone, Downtown (D6) Zone, or Residential Character Commercial (C1) Zone property line in accordance with the requirements of Section 4.19 of this By-law.

j) Outdoor Storage

No outdoor storage of goods, materials, or equipment shall be permitted.

13.3.3 ACCESSORY **BUILDINGS**

In accordance with the requirements of Section 4.8 of this By-law.

13.3.4 **PARKING** In accordance with the requirements of Section 5 of this By-law."

(Page 73 of 247)

- 8. That Schedule "A" Zoning Maps of By-law 05-200 is hereby added as follows:
 - a) by including Commercial and Mixed Use Zone boundaries, as shown on the Maps numbered 414, 415, 444 447, 516, 517, 550, 753, 793, 834, 862, 901, 904, 911, 913, 942, 943, 952 954, 988, 990, 1038, 1040, 1047, 1050, 1051, 1079, 1083 1085, 1089, 1092, 1097, 1100, 1124, 1127, 1128, 1130 1134, 1136 1139, 1146, 1149, 1150, 1174, 1176, 1179, 1182 1184, 1186, 1188, 1191, 1192, 1194, 1196, 1198, 1205, 1234 1236, 1240 1242, 1245, 1249, 1250, 1252 1254, 1259, 1260, 1280, 1281, 1284, 1285, 1287, 1289, 1291 1295, 1298, 1301, 1302, 1305, 1306, 1311, 1339, 1340, 1344 1348, 1352, 1383, 1386, 1394, 1395, 1397, 1398, 1399, 1403, 1405, 1435, 1436, 1447, 1448, 1456, 1497, 1498, 1503, 1549, 1552, 1595 1597, 1639 1641, 1710, 1749, 1786, 1887, and 1956, attached in Schedule "1" of this By-law; and,
 - b) by including Utility Zone boundaries, as shown on the Maps numbered 1040, 1084, and 1124 attached in Schedule "1" of this By-law.
- 9. That Schedule "A" Zoning Maps of By-law 05-200 is hereby amended as follows:
 - a) by including Commercial and Mixed Use Zone boundaries, as shown on the Maps numbered 481, 482, 549, 580 582, 612, 680, 859 861, 867, 871, 902, 903, 907 910, 912, 946 948, 950, 951, 955 958, 992 1001, 1039, 1041 1046, 1048, 1086, 1087, 1090, 1091, 1126, 1129, 1135, 1140, 1144, 1145, 1177, 1178, 1185, 1187, 1190, 1195, 1199, 1200, 1128, 1129, 1237 1239, 1246 1248, 1251, 1258, 1290, 1299, 1312, 1342, 1343, 1388, 1389, 1433, 1434, 1443, 1445, 1450, 1452 1454, 1457, 1482, 1483, 1494, 1499 1502, 1505, 1506, 1546 1548, 1591, 1593 1594, 1635, 1636, 1711, 1748, 1785, 1819, 1911, 1912, 1934, and 1935, attached in Schedule "1" of this By-law; and,
 - b) by including Utility Zone boundaries, as shown on the Maps numbered 860, 861, 902, 903, 912, 951, 955, 956, 999, 1000, 1039, 1043, 1044, 1045, and 1086 attached in Schedule "1" of this By-law.
- 10. That Schedule "C" Special Exceptions of By-law 05-200 is hereby amended by adding additional Special Exceptions as follows:
 - "294. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 951 of Schedule "A" Zoning Maps and described as 255, 257 and 259 Main Street West, the following special provisions shall apply:

(Page 74 of 247)

- a) Notwithstanding Subsection 10.5.1, only the following uses shall be permitted:
 - i) Craftsperson Shop;
 - ii) Day Nursery
 - iii) Educational Establishment
 - iv) Financial Establishment
 - v) Hotel
 - vi) Medical Clinic
 - vii) Multiple Dwelling
 - viii) Office
 - ix) Personal Services
 - x) Place of Worship
 - xi) Residential Care Facility
 - xii) Restaurant, within an Existing building
 - xiii) Retail, within an Existing building
 - xiv) Retirement Home
 - xv) Studio
- b) Notwithstanding Subsection 10.5.3 d), the Maximum Building Height shall be 14.0 metres.
- 297. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 951 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number
131 George Street	951
133 George Street	951
137 George Street	951
235 Main Street West	951
250 Main Street West	951
252 Main Street West	951
260 Main Street West	951
264 Main Street West	951
34 Queen Street South	951
36 Queen Street South	951
54 Queen Street South	951
74 Queen Street South	951

The following special provisions shall apply:

a) Notwithstanding Subsection 10.5.3 d), the Maximum Building Height shall be 14.0 metres.

(Page 75 of 247)

The following special provisions shall apply for 235 Main Street West:

- b) Notwithstanding Subsections 10.5.1, a Commercial Parking Facility shall be prohibited.
- c) In addition to Section 3: Definitions, the definition of Planting Strip shall also include the following:

Planting Strip

- A. A garbage storage shed, visual barrier, intake/exhaust grills having a total maximum area of 5.5 square metres and the existing metal shed and concrete wall existing on March 28, 2012 shall be permitted in a planting strip.
- B. A minimum 1.0 metre wide planting strip shall be provided for every parking area adjoining a Residential Zone.
- c) In addition to Subsection 5.1 a) v), the boundary of the parking area shall not be less than 1.0 metre from a Residential Zone.
- 298. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 909 and 951 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number
358 Jackson Street West	951
65 Locke Street South	951
80 Locke Street South	951
85 Locke Street South	951
87, 89 Locke Street South, and	951
348 Jackson Street West	
90 Locke Street South	951
96 Locke Street South	951
324 Main Street West	951
334 Main Street West	951
336 Main Street West	951
338 Main Street West	951
340 Main Street West	951
342 Main Street West	951
344 Main Street West	951
352 Main Street West	909 and 951
353 Main Street West	951

(Page 76 of 247)

Property Address	Map Number
358 Main Street West	909 and 951
358 Main Street West	909 and 951
359 Main Street West	951
360 Main Street West	909 and 951
364 Main Street West	909 and 951
365 Main Street West	951
368 Main Street West	909 and 951
369 Main Street West	951
370 Main Street West	909 and 951
374 Main Street West	909 and 951
377 Main Street West	951
379 Main Street West	951
381 Main Street West	951
383 Main Street West	951
385 Main Street West	951
388 Main Street West	909
389 Main Street West	951
391 Main Street West	951
399 Main Street West	909 and 951
401, 405 Main Street West	909 and 951
415 Main Street West	909 and 951
418 Main Street West	909
420 Main Street West	909
428 Main Street West	909
433 Main Street West	909 and 951
443 Main Street West	909
447 Main Street West	909
68 Margaret Street	909
69 Margaret Street	909
72 Margaret Street	909
74 Margaret Street	909
Part of 52 Pearl Street South	951
9 Poulette Street	951
54 Strathcona Avenue South	909
56 Strathcona Avenue South	909
59 Strathcona Avenue South	909
61 Strathcona Avenue South	909
63 Strathcona Avenue South	909
65 Strathcona Avenue South	909
67 Strathcona Avenue South	909

(Page 77 of 247)

The following special provisions shall apply:

- a) Notwithstanding Subsection 10.5.1, only the following uses shall be permitted:
 - i) Craftsperson Shop
 - ii) Day Nursery
 - iii) Educational Establishment
 - iv) Financial Establishment
 - v) Hotel
 - vi) Medical Clinic
 - vii) Multiple Dwelling
 - viii) Office
 - ix) Personal Services
 - x) Place of Worship
 - xi) Residential Care Facility
 - xii) Retirement Home
 - xiii) Studio
- b) In addition to Clause a), for the property located 443 Main Street West a drive-through facility in conjunction with a Restaurant within the Existing building shall also be permitted.
- 299. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 951 of Schedule "A" Zoning Maps and described:

Property Address	Map Number
261 Main Street West	951
265 Main Street West	951
267 Main Street West	951
269 Main Street West	951
271 Main Street West	951
275 Main Street West	951
276 Main Street West	951
277 Main Street West	951
278 Main Street West	951
279 Main Street West	951
280 Main Street West	951
282 Main Street West	951
283 Main Street West	951
284 Main Street West	951
286 Main Street West	951
287 Main Street West	951
291 Main Street West	951
299 Main Street West	951
301 Main Street West	951

(Page 78 of 247)

Property Address	Map Number
302 Main Street West	951
303 Main Street West	951
304 Main Street West	951
305 Main Street West	951
307 Main Street West	951
309 Main Street West	951
310 Main Street West	951
311, 313 Main Street West	951
315, 317 Main Street West	951
319 Main Street West	951
321 Main Street West	951
323 Main Street West	951
327 Main Street West	951
329 Main Street West	951
331 Main Street West	951
333 Main Street West	951
53 Pearl Street South	951
55 Pearl Street South	951
75 Pearl Street South	951
67 Ray Street South	951
68 Ray Street South	951

The following special provisions shall apply:

- a) Notwithstanding Subsection 10.5.1, only the following uses shall be permitted:
 - i) Craftsperson Shop
 - ii) Day Nursery
 - iii) Educational Establishment
 - iv) Financial Establishment
 - v) Hotel
 - vi) Medical Clinic
 - vii) Multiple Dwelling
 - viii) Office
 - ix) Personal Services
 - x) Place of Worship
 - xi) Residential Care Facility
 - xii) Restaurant, within an Existing building
 - xiii) Retail, within an Existing building
 - xiv) Retirement Home
 - xv) Studio

(Page 79 of 247)

300. Within the lands zoned Neighbourhood Commercial (C2) Zone, Community Commercial (C3) Zone, Mixed Use Medium Density (C5) Zone, District Commercial (C6) Zone, and Arterial Commercial (C7) Zone, identified on Maps 950, 956, 957, 998, 999, 1046, 1184 and 1238 of Schedule "A" – Zoning Maps and described as:

194 Avondale Street 956 196 Avondale Street 956 197 Avondale Street 956 198 Avondale Street 956 199 Avondale Street 956 200 Avondale Street 956 201 Avondale Street 956 203 Avondale Street 956 204 Avondale Street 956 205 Avondale Street 956 206 Avondale Street 956 207 Avondale Street 956 208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 215 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956 222 Avondale Street 956 221 Avondale Street 956	Duran auto A dalua aa	Mars Niversham
196 Avondale Street 956 197 Avondale Street 956 198 Avondale Street 956 199 Avondale Street 956 200 Avondale Street 956 201 Avondale Street 956 203 Avondale Street 956 204 Avondale Street 956 205 Avondale Street 956 206 Avondale Street 956 207 Avondale Street 956 208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 215 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956 222 Avondale Street 956 221 Avondale Street 956 222 Avondale Street 956	Property Address	Map Number
197 Avondale Street 956 198 Avondale Street 956 199 Avondale Street 956 200 Avondale Street 956 201 Avondale Street 956 203 Avondale Street 956 204 Avondale Street 956 205 Avondale Street 956 206 Avondale Street 956 207 Avondale Street 956 208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 215 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956		
198 Avondale Street 956 199 Avondale Street 956 200 Avondale Street 956 201 Avondale Street 956 203 Avondale Street 956 204 Avondale Street 956 205 Avondale Street 956 206 Avondale Street 956 207 Avondale Street 956 208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 215 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956		
199 Avondale Street 956 200 Avondale Street 956 201 Avondale Street 956 203 Avondale Street 956 204 Avondale Street 956 205 Avondale Street 956 206 Avondale Street 956 207 Avondale Street 956 208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 215 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956		
200 Avondale Street 956 201 Avondale Street 956 203 Avondale Street 956 204 Avondale Street 956 205 Avondale Street 956 206 Avondale Street 956 207 Avondale Street 956 208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956		
201 Avondale Street 956 203 Avondale Street 956 204 Avondale Street 956 205 Avondale Street 956 206 Avondale Street 956 207 Avondale Street 956 208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956		
203 Avondale Street 956 204 Avondale Street 956 205 Avondale Street 956 206 Avondale Street 956 207 Avondale Street 956 208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 215 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956		
204 Avondale Street 956 205 Avondale Street 956 206 Avondale Street 956 207 Avondale Street 956 208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956		
205 Avondale Street 956 206 Avondale Street 956 207 Avondale Street 956 208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956		
206 Avondale Street 956 207 Avondale Street 956 208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956		
207 Avondale Street 956 208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956 221 Avondale Street 956		
208 Avondale Street 956 209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956		
209 Avondale Street 956 210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956		
210 Avondale Street 956 212 Avondale Street 956 214 Avondale Street 956 216 Avondale Street 956 217 Avondale Street 956 218 Avondale Street 956 219 Avondale Street 956 220 Avondale Street 956 221 Avondale Street 956	208 Avondale Street	956
212 Avondale Street956214 Avondale Street956216 Avondale Street956217 Avondale Street956218 Avondale Street956219 Avondale Street956220 Avondale Street956221 Avondale Street956221 Avondale Street956	209 Avondale Street	956
214 Avondale Street956216 Avondale Street956217 Avondale Street956218 Avondale Street956219 Avondale Street956220 Avondale Street956221 Avondale Street956221 Avondale Street956	210 Avondale Street	956
216 Avondale Street956217 Avondale Street956218 Avondale Street956219 Avondale Street956220 Avondale Street956221 Avondale Street956	212 Avondale Street	956
217 Avondale Street956218 Avondale Street956219 Avondale Street956220 Avondale Street956221 Avondale Street956	214 Avondale Street	956
218 Avondale Street956219 Avondale Street956220 Avondale Street956221 Avondale Street956	216 Avondale Street	956
219 Avondale Street956220 Avondale Street956221 Avondale Street956	217 Avondale Street	956
220 Avondale Street 956 221 Avondale Street 956	218 Avondale Street	956
221 Avondale Street 956	219 Avondale Street	956
	220 Avondale Street	956
000 A	221 Avondale Street	956
222 Avondale Street 956	222 Avondale Street	956
223 Avondale Street 956	223 Avondale Street	956
224 Avondale Street 956	224 Avondale Street	956
226 Avondale Street 956	226 Avondale Street	956
228 Avondale Street 956	228 Avondale Street	956
230 Avondale Street 956	230 Avondale Street	956
235 Avondale Street 956	235 Avondale Street	956
797 Barton Street East 956	797 Barton Street East	956
799 Barton Street East 956		956
889 Barton Street East 956	889 Barton Street East	956
891 Barton Street East 956		
893 Barton Street East 956		
895 Barton Street East 956		
897 Barton Street East 956		
901 Barton Street East 956		

(Page 80 of 247)

Property Address	Map Number
903 Barton Street East	956
905, 907 Barton Street East	956
909, 911 Barton Street East	956
913 Barton Street East	956
915 Barton Street East	956
954 Barton Street East	956 and 957
970 Barton Street East	957 and 999
Part of 973 Barton Street East	957
975, 981, 983 Barton Street East	957
984 Barton Street East	957 and 999
985 Barton Street East	957
986 Barton Street East	957 and 999
991 Barton Street East	957
999 Barton Street East	957 and 999
1015 Barton Street East	957 and 999
1850 Barton Street East	1046
1860 Barton Street East	1046
1870 Barton Street East	1046
1880 Barton Street East	1046
1890 Barton Street East	1046
1900 Barton Street East	1046
1910 Barton Street East	1046
1920 Barton Street East	1046
1930 Barton Street East	1046
1940 Barton Street East	1046
1950 Barton Street East	1046
1960 Barton Street East	1046
1970 Barton Street East	1046
1980 Barton Street East	1046
1990 Barton Street East	1046
190 Cavell Avenue	956
192 Cavell Avenue	956
193 Cavell Avenue	956
194 Cavell Avenue	956
196 Cavell Avenue	956
198 Cavell Avenue	956
120 Chatham Street	950
204 Gage Avenue North	956
208 Gage Avenue North	956
210 Gage Avenue North	956
212 Gage Avenue North	956
214 Gage Avenue North	956
216 Gage Avenue North	956
218 Gage Avenue North	956

(Page 81 of 247)

Property Address	Man Number
Property Address	Map Number
220 Gage Avenue North	956
230 Gage Avenue North	956
200 Glendale Avenue North	957, 998 and 999
240 Glendale Avenue North	998 and 999
242 Glendale Avenue North	998 and 999
244 Glendale Avenue North	998 and 999
246 Glendale Avenue North	998, 956 and 999
248 Glendale Avenue North	956, 957, 998, and 999
250 Glendale Avenue North	956 and 957
1 Gordon Street	956
3, 5, 7 Gordon Street	956
9 Gordon Street	956
10 Gordon Street	956
11 Gordon Street	956
12 Gordon Street	956
13 Gordon Street	956
14 Gordon Street	956
16 Gordon Street	956
17 Gordon Street	956
18 Gordon Street	956
19 Gordon Street	956 and 957
20 Gordon Street	956
21 Gordon Street	956 and 957
22 Gordon Street	956
23 Gordon Street	957
24 Gordon Street	956 and 957
25 Gordon Street	957
26 Gordon Street	956 and 957
28 Gordon Street	956 and 957
30 Gordon Street	957
32 Gordon Street	957
34 Gordon Street	957
36 Gordon Street	957
38 Gordon Street	957
40 Gordon Street	957
42 Gordon Street	957
44 Gordon Street	957
46 Gordon Street	957
48 Gordon Street	957
50 Gordon Street	957
51 Gordon Street	957
53 Gordon Street	957
132 Hester Street	1238
138 Hester Street	1238
וטט ו ובאנבו טנובבנ	1200

(Page 82 of 247)

Droporty Addrops	Man Number
Property Address	Map Number
141 Hester Street	1184 and 1238
143 Hester Street	1184 and 1238
146 Hester Street	1238
151 Hester Street	1238
152 Hester Street	1238
158 Hester Street	1238
160 Hester Street	1238
8 Lincoln Street	957
10 Lincoln Street	957
11 Lincoln Street	957
12 Lincoln Street	957
13 Lincoln Street	957
14 Lincoln Street	957
15 Lincoln Street	957
16 Lincoln Street	957
17 Lincoln Street	957
18 Lincoln Street	957
19 Lincoln Street	957
20 Lincoln Street	957
21 Lincoln Street	957
22 Lincoln Street	957
23 Lincoln Street	957
25 Lincoln Street	957
26 Lincoln Street	957
27 Lincoln Street	957
29 Lincoln Street	957
32, 34, 36, 38 Lincoln Street	957
33 Lincoln Street	957
16 Linden Street	956 and 957
18 Linden Street	957
30 Linden Street	957
2 Lloyd Street	956
4 Lloyd Street	956
6 Lloyd Street	956
8 Lloyd Street	956
10 Lloyd Street	956
12 Lloyd Street	956
20 Lloyd Street	956
26 Lloyd Street	956
32 Lloyd Street	956
34 Lloyd Street	956
36 Lloyd Street	956
38 Lloyd Street	956
40 Lloyd Street	956
10 Lloyd Ottoot	1000

(Page 83 of 247)

Property Address	Map Number
42 Lloyd Street	956
44 Lloyd Street	956
46 Lloyd Street	956
50 Lloyd Street	956
52 Lloyd Street	956
54 Lloyd Street	956
56 Lloyd Street	956
Part of 221 Melvin Avenue	1046
295 Melvin Avenue	1046
291 Rosslyn Avenue North	957
1012 Upper Wellington Street	1238
1020 Upper Wellington Street	1238
1028 Upper Wellington Street	1238
1042 Upper Wellington Street	1238
Part of 335 Woodward Avenue	1046

The following special provisions shall apply:

- a) In addition to Subsections 10.2.1, 10.3.1, 10.5.1, 10.6.1, and 10.7.1, existing industrial uses shall also be permitted:
- 301. Within the lands zoned District Commercial (C6) Zone, identified on Maps 1258, 1259, 1311, and 1312 of Schedule "A" Zoning Maps and described as 1310 and 1360 South Service Road, 400 Winona Road, and 395 Fifty Road, the following special provisions shall apply:
 - a) In addition to Subsection 10.6.1, the following uses shall also be permitted:
 - i) Post Office
 - ii) Kennel
- 302. Within the lands zoned Mixed Use High Density (C4) Zone, identified on Maps 1239 and 1292 of Schedule "A" Zoning Maps and described as 883 and 999 Upper Wentworth Street and 508, 520 and 524 Limeridge Road East, shown as Figure 10 of Schedule "F" Special Figures, the following special provisions shall apply:
 - a) Notwithstanding Section 3: Definitions and for the purpose of Special Exception 302:
 - i) Front Lot Line shall mean the lot line of the lot abutting Upper Wentworth Street.

(Page 84 of 247)

- ii) Commercial recreation or commercial entertainment may include an Amusement arcade.
- b) In addition to Section 3: Definitions, for the purpose of Special Exception No. 302, the following definition shall apply:

Motor	Vehicle	Shall mean an establishment located within a	
Show Room		building where motor vehicles are displayed for	
		the purpose of sale or leasing, and may include	
		service bays, accessory retailing of souvenir	
		merchandise and storage of motor vehicles and	
		shall not include a Motor Vehicle Service Station.	

- c) In addition to Subsection 10.4.1, following uses shall also be permitted:
 - i) Motor Vehicle Showroom
 - ii) Educational Establishment
- d) For the purposes of Special Exception No. 302 the following special regulations shall apply to Areas A to E, as shown on Figure 10 of Schedule "F" – Special Figures
 - i) In addition to Section 4.19 and notwithstanding Subsections 5.2b) and 5.2f), the following regulations shall apply:

1)	Parking Space Size Dimension	A minimum parking space size of 2.6 metres by 5.5 metres shall be provided
2)	Barrier Free Space Size Dimension	A minimum barrier free space size of 4.4 metres by 5.5 metres shall be provided.

- e) For the purposes of Special Exception No. 302 the following special regulations shall apply to **Areas A to D** as shown on Figure 10 of Schedule "F" Special Figures
 - i) Notwithstanding Subsection 10.4.3d) i), a minimum building height of 6.0 metres shall be provided for any commercial building having a maximum Gross Floor Area of 1,000 square metres and fronting on Upper Wentworth Street or Limeridge Road East containing only one or more of the following uses
 - 1) Financial Establishment
 - 2) Personal Service
 - 3) Restaurant
 - 4) Retail

(Page 85 of 247)

- ii) Notwithstanding 10.4.3d) i), for a commercial building greater than 1,000 square metres of Gross Floor Area, the minimum building height shall be 7.5 metres;
- iii) The ground floor façade facing a front lot line and access driveway to the site shall be greater than or equal to 50% of the measurement of the width identified for Area A1 to D in Figure 10 for buildings greater than 1,000 square metres and shall exclude access driveways and lands within a required yard.
- iv) In addition to Clauses e) i) and ii) and notwithstanding Subsection 5.1 a) v), the following regulations shall also apply to Area A:
 - 1) Notwithstanding Subsection 10.4.3g) ii), parking spaces and aisles may be permitted within 2.0 m of the front lot line for Area A.
 - A 2.0 metre planting strip shall be provided and maintained for Area A where parking spaces or aisles abut Upper Wentworth Street.
 - 3) Subsection 10.4.3 a) shall not apply.
- f) For the purposes of Special Exception No. 302 the following special regulations shall apply to <u>Area E</u> as shown on Figure 10 of Schedule "F" Special Figures:
 - i) In addition to 10.4.3 d) i), the following heights shall apply:

1) Commercial Building No minimum

Office Building
 Residential Building
 Minimum 11 metres
 Building

- ii) Subsections 10.4 3 a), 10.4.3. g)ii), and 10.4.3. g)iii) shall not apply.
- iii) In addition to Subsection 10.4.3 k)ii), display of goods and materials for retail purposes accessory to a retail use, shall be permitted in any yard.
- iv) Subsection 10.4.3 k)ii) and clause f)iii) shall not apply to motor vehicles,

(Page 86 of 247)

- iv) In addition to Section 4.19 and notwithstanding Subsection 10.4.3 j), the following regulation shall apply:
 - 1) Visual Barrier The chain link fence existing on the date of the passing of the By-law and located along the eastern boundary shall also be considered as a Visual Barrier.
- 303. Within the lands zoned Arterial Commercial (C7) Zone, identified on Maps 1445 and 1494 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number
1821 Upper James Street	1445
1853 Upper James Street	1445 and 1494
1861 Upper James Street	1445 and 1494
1879 Upper James Street	1494
1885 Upper James Street	1494
1899 Upper James Street	1494
1915 Upper James Street	1494
1927 Upper James Street	1494
1937 Upper James Street	1494
1947 Upper James Street	1494
1955 Upper James Street	1494
1977 Upper James Street	1494
8518 Twenty Road East	1494

The following special provisions shall apply:

- a) Notwithstanding Subsection 10.7.1 and in addition to Subsection 10.7.2, the following uses shall be prohibited:
 - i) Commercial Entertainment
 - ii) Commercial Recreation

The following special provisions shall also apply for the property located at 1955 Upper James Street:

- b) In addition to Subsection 10.7.1, the following uses shall also be permitted:
 - i) Labour Association Hall
 - ii) Place of Worship
- c) Notwithstanding the definition of Place of Worship under Section 3: Definitions, the following shall apply:

(Page 87 of 247)

Place of Worship

A building used by any religious organization for public worship or other ecclesiastical functions and may include accessory or ancillary uses which shall include accessory or ancillary uses which shall include but not be limited to an assembly hall, auditorium, convent, monastery, rectory, cemetery, day nursery and educational or recreational uses.

- d) Notwithstanding Subsections 5.2b), 5.2f), 5.5 a), 5.5 c) and 10.7.3 b), c), the following regulations shall apply only to a Place of Worship:
 - i) Minimum Northerly Side Yard
- 1. 1.9 metres for westerly side of building; and,
- 2. 4.6 metres for easterly side of building.
- ii) Minimum Southerly Side Yard
- 2.8 metres for the easterly building
- iii) Minimum Rear Yard
- 16.0 metres
- iv) Landscaped Area
- A landscaped area in the form of a 2.0 metre wide planting strip and a board fence shall be provided between the parking area and the northerly side yard, except for that portion of land between the front lot line and the existing westerly building.
- 2. A landscaped area with a minimum width of 3.7 metres shall be provided along the street line, and it shall be continuous except for driveways required for access to such parking area.
- v) Minimum Number of 51, including 1 barrier free parking space Parking Spaces
- vi) Parking Space Size A minimum parking space size of 2.6 Dimension metres by 5.5 metres shall be provided.
- vii) Barrier Free Space A minimum barrier free space size of 4.4 Size Dimension metres by 5.5 metres shall be provided.

(Page 88 of 247)

304. Within the lands zoned Neighbourhood Commercial (C2) Zone, Community Commercial (C3) Zone, Mixed Use Medium Density (C5) Zone, Mixed Use Medium Density – Pedestrian Focus (C5a) Zone, identified on Maps 482, 860, 903, 912, 947, 956, 1039, 1042, 1085, 1136, 1175, 1234, 1251, 1287, 1302, 1389, 1502 and 1956 of Schedule "A" – Zoning Maps and described as:

Property Address	Map Number
925 Barton Street East	956
19 Flamboro Street	482
Part of 18-64 Hamilton Street North	482
473-489 Upper Wellington Street	1039 and 1085
139 and 141 Oak Avenue	912
902 Main Street East	1042
386 Upper Gage Avenue and 63	1136
East 39 th Street	
283 and 289 Highway No. 8	1251
889 Upper Paradise Road	1234 and 1287
200 King Street West	860
121 King Street West	860
134, 138 King Street West	860
10 Foundry Street	860
1 Osler Drive	903
1655 Main Street West	947
407, 413 Wilson Street East	1175
82 King Street East	1302 and 1249
605 Garner Road East	1389
136-146 Upper Mount Albion Road	1502
3194 Regional Road 56	1956

The following special provisions shall apply:

- a) In addition to Subsections 10.2.1, 10.3.1, 10.5.1, 10.5a.1, the existing motor vehicle related use shall also be permitted.
- b) In addition to Subsections 10.3.1 and 10.5a.1, for the lands located at 136-146 Upper Mount Albion Road and 19 Flamboro Street, a Motor Vehicle Washing Establishment shall also be permitted.
- c) In addition to Subsection 10.5a.1, for the lands located at 3194 Regional Road 56, a Motor Vehicle Gas Bar shall also be permitted.
- d) In addition to Subsection 10.3.1, for the lands located at 1 Osler Drive, a Motor Vehicle Service Station and a Motor Vehicle Rental Establishment shall also be permitted.

(Page 89 of 247)

e) Notwithstanding Subsections 5.2b) and 5.2f), for lands located at 386 Upper Gage Avenue, the following special Parking regulations shall also apply:

i) Parking Space Size A minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided.
 ii) Barrier Free Parking A minimum barrier free parking space size dimension of 4.4 metres by 5.5 metres.

Space Size
Dimension

A minimum barrier free parking space size dimension of 4.4 metres by 5.5 metres shall be provided.

- f) In addition to Subsection 10.5.1 for lands located at 925 Barton Street East, the existing Motor Vehicle Service Station and Motor Vehicle Collision Repair Establishment shall also be permitted.
- 305. Within the lands zoned District Commercial (C6) Zone, identified on Map 1748 of Schedule "A" Zoning Maps and described as 3234A Homestead Drive, the following special provision shall apply:
 - a) In addition to Subsection 10.6.1, existing Manufacturing use shall also be permitted.
- 306. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 860 of Schedule "A" Zoning Maps and described as being located at 16 Foundry Street, the following special provision shall apply:
 - a) In addition to Subsection 10.5.1, a Tradesperson Shop shall also be permitted.
- 307. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Maps 911 and 912 of Schedule "A" Zoning Maps, and described as 268, 270, 272, 276 Wellington Street North and 240 Barton Street East, the following special provisions shall apply:
 - a) No visual barrier shall be required along the rear lot line between a Commercial Parking Facility and the existing dwelling at 266 Wellington Street North.
 - b) Subsection 10.5a.1.1 i) 3. A. shall not apply.
 - c) Notwithstanding Subsections 5.1a)v), 5.2b), 5.2f), and 10.5a.3) i), the following regulations shall apply to a Commercial Parking Facility:
 - i) Planting Strip 1. Minimum width of 1.2 metres Requirements shall be provided and maintained at the rear lot line.

(Page 90 of 247)

- 2. A planting strip may be obstructed by a visual barrier and may be obstructed by an existing building of the adjacent property located at 266 Wellington Street North.
- Minimum width of 2.0 metres shall be provided and maintained along a lot line abutting a street.
- ii) Distance of Parking Lot from Street

A parking lot, excluding driveways extending directly from the street, shall not be located within 2.0 metres of a street line.

iii) Parking Space Size Dimension A minimum parking space size of 2.6 metres by 5.5 metres shall be provided.

iv) Barrier Free
Parking Space
Size
Dimension

A minimum barrier free parking space size dimension of 4.4 metres by 5.5 metres shall be provided.

- 308. Within the lands zoned District Commercial (C6) Zone, identified on Maps 1084, 1132 and 1133 of Schedule "A" Zoning Maps and described as 657, 659, 661, 663, 665, 667, 673, 675, 677 Upper James Street, the following special provisions shall apply:
 - a) Notwithstanding the definition of Front Lot Line in Section 3: Definitions of this By-law, the definition of the Front Lot Line shall mean any lot line of the lot abutting Upper James Street.
 - b) Notwithstanding Subsections 4.19, 5.2b), 5.2f), 5.6 c), 10.6.3 a), b), c), and i), the following regulations shall apply:
 - i) Minimum Front Yard 2.3 metres.
 - ii) Minimum Rear Yard 7.3 metres.
 - iii) Minimum Side Yard 4.9 metres (southerly side yard) with further eave projection.
 - iv) Parking 1 space per 27 square metres of Requirement Gross Leasable Floor Area for any

(Page 91 of 247)

permitted commercial use.

V) Parking Space Size A minimum parking space size of 2.5 metres by 5.5 metres shall be Dimension provided. Barrier Free Parking A minimum barrier free parking vi) Space Size space size dimension of 4.4 metres Dimension by 5.5 metres shall be provided. Visual Barrier vii) Maximum height of 2.6 metres Noise Attenuation Wall provided along the portion of the Easterly lot line abutting a Residential Zone.

- c) Notwithstanding Subsection 5.2.1 c), loading doors and associated loading facilities shall also be permitted in the rear yard abutting a Residential Zone or Institutional Zone and 1.5 metres away from the rear lot line.
- 311. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 912 of Schedule "A" Zoning Maps and described as 448 Barton Street East, the following special provisions shall apply:
 - a) In addition to Subsection 10.5a.1, the existing Manufacturing use shall also be permitted.
- 312. Within those lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 1911 and 1934 of Schedule "A" Zoning Maps, and described as 2550, 2640, 2651, and 2654 Regional Road 56, the following special provision shall apply:
 - a) In addition to Subsection 10.5.1, a fairground shall also be permitted.
- 313. Within the lands zoned Neighbourhood Commercial (C2) Zone, identified on Maps 1241, 1248, 1249, and 1252 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number
454 – 458 Highway 8	1252
30, 32, 36 Lake Avenue Drive	1248 and 1249
796 Upper Gage Avenue	1241

The following special provisions shall apply:

a) In addition to Subsection 10.2.1, a Funeral Home shall also be permitted.

(Page 92 of 247)

- b) In addition to Clause a), a Parking Lot accessory to a Funeral Home shall also be permitted at 30 Lake Avenue Drive.
- 314. Within the lands zoned Community Commercial (C3) Zone, identified on Map 1260 of Schedule "A" Zoning Maps and described as 3 and 15 Lockport Way, the following special provisions shall apply:
 - a) In addition to Subsection 10.3.1, the following uses shall also be permitted:
 - i) Commercial Recreation
 - ii) Place of Assembly
 - iii) Equipment and Machinery Sales
 - iv) Rental and Service Establishment
 - v) Funeral Home
 - vi) Commercial Entertainment
 - vii) Museum
 - viii) Place of Worship
- 315. Within the lands zoned Arterial Commercial (C7) Zone, identified on Maps 1499, 1505, 1506, 1546, 1635 and 1636 of Schedule "A" Zoning Maps and described as 1170, 1188 and 1205 Rymal Road East, 267, 275 283 and 293 Upper Centennial Parkway and 5365 Twenty Road East, the following special provisions shall apply:
 - a) In addition to Subsection 10.7.1, the following uses shall also be permitted:
 - i) Retail
 - ii) Office
 - iii) Personal Service
 - b) In addition to Subsection 10.7.1 and Clause a) and notwithstanding Clause a) ii), for the lands located at 267, 275, 277, 279, 283 and 293 Upper Centennial Parkway, the following uses shall also be permitted:
 - i) Financial Establishment
 - ii) Medical Clinic
 - iii) Office, provided it is located above the ground floor
 - c) In addition to Subsection 10.7.1 and Clause a), for the lands located at 5365 Twenty Road East, the following uses shall also be permitted:
 - i) Custom Workshop
 - ii) Day Nursery
 - iii) Financial Establishment

(Page 93 of 247)

iv) Manufacturing, except for the uses listed below which shall be prohibited, even as an accessory use:

Beverage Distillation

Breweries

Concrete Crushing

Manufacturing of Asbestos, Phosphate or Sulphur Products
Primary Production of Chemicals, Synthetic Rubber, Plastic,
Asphalt or Cement, not including mixing, blending,

treatment or similar process

Processing or Refining of Petroleum or Coal

Processing, Milling or Packaging of Animal Feed

Rock Crushing

Salvage Yard

Slaughtering, Eviscerating, Rendering or Cleaning of Meat, Poultry or Fish or by-products thereof

Smelting of Ore or Metal

Tanning or Chemical Processing of Pelts or Leather

Vulcanizing or Rubber or Rubber Products

Explosives Manufacturing

Pulp and Paper Mills

- v) Medical Clinic
- d) Notwithstanding Subsections 5.1 a) v) b), 5.6c) and 10.7.3a), b), c), and d), for the lands located at 267, 275, 277, 279, 283 and 293 Upper Centennial Parkway, the following regulations shall apply:

i)	Minimum Front Yard	3.0 metres

- ii) Maximum Front Yard 6.0 metres
- iii) Minimum Side Yard 3.0 metres
- iv) Minimum Rear Yard 1.0 metres
- v) Maximum Height 15.0 metres
- vi) Minimum Landscape Open Space
- 1. A landscape strip having a minimum width of 3.0 metres shall be provided adjacent to any street except for points of ingress and egress.
- 2. A landscape strip having a minimum width of at

(Page 94 of 247)

least 3.0 metres shall be provided adjacent to every portion of any lot line that abuts any zone other than a commercial or industrial zone.

vii) Minimum Parking Requirements

A minimum of one parking space per 28 square metres of gross floor area or fraction thereof shall be required.

viii) Minimum Loading Requirements

1 loading space shall be

required.

- ix) A minimum of 40 percent of the ground floor façade shall be composed of windows and doors for the buildings fronting Mud Street West and Upper Centennial Parkway
- x) The minimum combined width of the ground floor façade of all buildings located along Mud Street West shall be equal to 40 percent or more of the measurement of the front lot line, and shall be subject to a maximum building setback of 6.0 metres.
- xi) The minimum combined width of the ground floor façade of all buildings located along Upper Centennial Parkway shall be equal to 40 percent or more of the measurement of the side lot line, and shall be subject to a maximum building setback of 6.0 metres.
- e) Notwithstanding Subsections 5.1 a) v) b) and 10.7.3 a), for the lands located at 5365 Twenty Road East, the following regulations shall also apply:

i)	Minimum Lot	45.0 metres
	Frontage	

ii) Minimum Lot Depth 75.0 metres

iii) Minimum Lot Area 0.4 hectares

iv) Minimum Front Yard 15.0 metres

v) Minimum A. A landscaped area having

(Page 95 of 247)

Landscaping Requirements

a minimum width of 7.5 metres shall be provided and thereafter maintained adjacent to every portion of any lot line that abuts a street line (except driveways) or any Zone where the adjoining land is used for residential or institutional purposes.

- B. All portions of any lot not covered by buildings or structures or not used for driveways, storage, parking, loading or walkways, shall be grassed or have other suitable vegetative cover designed to provide an attractive appearance.
- 316. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 1039 and 1085 of Schedule "A" Zoning Maps and described as 488 Upper Wellington Street, the following special provisions shall apply:
 - a) In addition to Subsection 10.5a.1, only one of the following uses shall also be permitted.
 - i) Townhouse Dwellings
 - ii) Multiple Dwellings
 - b) In addition to Clause i), a maximum of 12 townhouse dwelling units shall be permitted or a maximum of 18 multiple dwelling units shall be permitted.
 - c) Notwithstanding Subsections 5.1a) v) a), 10.5a.3 a), and d) ii) and iii), the following regulations shall apply:

i) Minimum Lot Area 3,600 square metres

ii) Maximum Height 11.0 metres or two storeys

iii) Yard abutting A yard having a minimum depth of Northerly Lot Line 3 metres in the case of multiple dwellings or 6 metres in the case

(Page 96 of 247)

of townhouse dwellings shall be provided and maintained along the northerly lot line.

iv) Location of Parking Spaces

Parking spaces shall be separated from the street by a building or structure, or by a planting strip having a minimum of 3.0 metres in the case of multiple dwellings, or 6.0 metres in the case of townhouse dwellings, except for any areas used for vehicular access.

317. Within the lands zoned Mixed Use Medium Density – Pedestrian Focus (C5a) Zone, identified on Map 1040, 1044, 1934 of Schedule "A" – Zoning Maps and described as:

Property Address	Map Number
473 Concession Street	1040
130 Kenilworth Avenue North	1044
2660, 2668 Binbrook Road	1934
2651 Regional Road 56	1934

The following special provision shall apply:

- a) In addition to Subsection 10.5a.1 and notwithstanding Section 10.5a.2 ii), the following uses shall also be permitted:
 - i) Drive-Through Facility
- b) Notwithstanding Subsections 5.2b) and 5.2f), 5.6c) for the lands located at 2660, 2668 Binbrook Road and 2651 Regional Road 56, the following special regulations shall also apply:
 - i) Parking Space Size A minimum parking space size dimension
 Dimension of 2.6 metres by 5.5 metres shall be provided.
 - ii) Barrier Free Parking A minimum barrier free parking space size Space Size dimension of 4.0 metres by 5.5 metres bimension shall be provided.
 - iii) Parking 1. 1 space per residential unit; and,

(Page 97 of 247)

Requirements

- 1 space per 31.5 square metres of Gross Floor Area for any commercial use.
- 318. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 1342, 1343, 1394 and 1395 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number
20 Rymal Road East	1394
25 Rymal Road West	1394
35 Rymal Road West	1394
41 Rymal Road West	1394
49 Rymal Road East	1394 and 1395
55 Rymal Road East	1394 and 1395
57 Rymal Road West	1394
71 Rymal Road West	1394
79 Rymal Road West	1394
16 Stone Church Road East	1394
24 Stone Church Road East	1343
1351 Upper James Street	1343
1355 Upper James Street	1343
1359 Upper James Street	1343
1367 Upper James Street	1343
1375 Upper James Street	1343
1379 Upper James Street	1343
1389 Upper James Street	1343
1405 Upper James Street	1342 and 1343
1425 Upper James Street	1342 and 1343
1451, 1471 Upper James Street	1342, 1343 and 1395
1495 Upper James Street	1342, 1394 and 1395
1505 and 1515 Upper James Street	1394 and 1395
1527 Upper James Street	1394
1545 Upper James Street	1394 and 1395
1565 Upper James Street	1394 and 1395
1587, 1591 and 1599 Upper James Street	1394
1595 Upper James Street	1394
1616 Upper James Street	1394

The following special provisions shall apply:

a) In addition to Subsection 10.5.1 and notwithstanding Subsection 10.5.2, the following uses shall also be permitted:

(Page 98 of 247)

- i) Commercial Motor Vehicle Sales, Rental and Service Establishment
- ii) Equipment and Machinery Sales, Rental and Service Establishment
- iii) Garden Centre
- iv) Major Recreational Equipment Sales, Rental and Service Establishment
- v) Motor Vehicle Dealership
- vi) Motor Vehicle Rental Establishment
- vii) Surveying, Engineering, Planning or Design Business
- viii) Warehouse
- b) Notwithstanding the definition of Planting Strip and Landscaped Area in Section 3: Definitions and notwithstanding Subsections 4.19, 10.5.3 i), and in addition to Subsection 10.5.3 j) for lands located at 55 Rymal Road East, the following regulations shall also apply:
 - i) For the purposes of Special Exception No. 318 the following definitions shall also apply:

Planting Strip

Means an area of land growing ornamental shrubs or trees or both, suitable to the soil and climatic conditions of the area of land for the sole purpose of providing a visual barrier or buffer, and shall include light standards.

Landscaped Area

- 1) Shall mean an area of land provided and maintained on the same lot on which the building or structure is situated and shall include light standards and signage. No part the of Landscaped Area shall be other than:
 - Fully and completely open and exposed to natural light and air and unobstructed above the surface;
 - Used exclusively for scenic, recreational or like uses; and,

(Page 99 of 247)

- Not less than 50% of which iii) be natural earth shall comprised of the natural planting of grass lawns, trees, shrubs and flowers in such manner as to establish and enhance the beautification of the landscaped area and any building or structure on the same lot, and may include a planting strip.
- 2) In addition to the regulations of 3(k)(i), signage in a landscaped area shall only be permitted in the front yard.
- 3) And shall not include area used for parking space, manoeuvring space. access or egress driveways or any other vehicular purpose of any kind, nor any area bν occupied an accessorv building, nor any open space beneath, within or on the roof of building except where any permitted in a zone.
- ii) In addition to Subsection 5.1a) v), for every parking lot and loading space on a lot adjoining at Residential Zone, a Landscaped Area with a Planting Strip of not less than 1.5 metres in width between the parking lot and the lot line abutting a Residential use, and a visual barrier being 2.0 metres in height, shall be provided and maintained.
- c) Notwithstanding Sections 10.5.3a), b), c), d), and k), the following regulations shall apply only to the uses listed in Clause a):
 - i) Minimum Front Yard 18.0 metres Setback
 - ii) Minimum Rear Yard i) 6.0 metres; and,
 - ii) 7.5 metres abutting a Residential or Institutional Zone or lot

(Page 100 of 247)

containing a residential use.

- iii) Minimum Side Yard i) 1.5 metres; and,
 - ii) 4.5 metres abutting a Residential or Institutional Zone or lot containing a residential use.
- iv) Building Height Maximum 14.0 metres.
- v) Subsections 10.5.3g) ii), iii), iv), and vi) shall not apply.
- vi) Outdoor Storage i) The display of goods or materials for retail purposes accessory to a Retail use shall only be
 - permitted in the front, side, and rear yard;
 - ii) Notwithstanding Clause i), an outdoor storage area shall not be located on a planting strip, or required parking or loading area; and,
 - iii) An Outdoor storage area shall be located a of minimum 6.0 metres from a Residential or Institutional Zone or lot containing a residential use, or a lot line fronting onto a street, and shall be screened or fenced from view.
 - iv) An outdoor storage area attached to a building shall not exceed 500 square metres, or an area equivalent to 5% of

(Page 101 of 247)

the Gross Floor Area, whichever is lesser.

- 319. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 1452, 1453, 1501, 1502 of Schedule "A" Zoning Maps and described as Heritage Green, shown as Figure 8 of Schedule "F" Special Figures, the following special provisions shall apply:
 - a) In addition to Section 3: Definitions, the following definitions shall also apply:

Dwelling Group Means a group of more than one

maisonette, townhouse or apartment

or any combination thereof.

Maisonette Shall mean a back to back townhouse

dwelling.

Live/Work Unit

Shall mean a dwelling unit having a residence and business in the same location which consists of a ground floor commercial unit having a maximum of 50 square metres of gross floor area and an upper level residential unit. Commercial uses in a "Live / Work Unit" shall be limited to a personal service shop, a professional office, and a retail store.

Wholesale and Retail Warehouse Facility

Shall mean a large scale building, with a minimum Gross Floor Area of 4,645 square metres, which distributes a broad range of goods or distributes high volumes of a specific type of merchandise and functions in a warehouse format where most goods are stored, displayed and offered for sale in one and the same area, but excludes department stores and supermarkets.

Warehouse Membership Club

Shall mean a building with a minimum Gross Floor Area of 4,645 square metres, occupied by a single user, where the principal use is the sale of food and non-food products which are generally stored, displayed and

(Page 102 of 247)

offered for sale in one and the same area in a warehouse format and where, customers, whether retail or wholesale, are generally required to be members of the club, but excludes department stores and supermarkets.

- b) For the purposes of Special Exception No. 319 the following special provisions shall apply to **Area A** as shown on Figure 8 of Schedule "F" Special Figures:
 - A) In addition to Subsection 10.5.1, the following uses shall also be permitted:
 - i) Building or Contracting Supply Establishment
 - ii) Building and Lumber Supply Establishment
 - iii) Home Improvement Supply Establishment
 - iv) Warehouse Membership Club
 - v) Wholesale and Retail Warehouse Facility
 - B) In addition to Subsection 10.5.2, the following use shall also be prohibited:
 - i) Food Store
 - C) Notwithstanding Subsections 5.6c), 10.5.3 a), c), d), g)ii) and iii), the following Regulations shall apply:
 - i) Maximum Lot 25 percent Coverage
 - ii) Minimum and Maximum Setback
- A. Minimum 6.0 metres from the south lot line:
- B. Minimum 6.0 metres from east lot line (for Wholesale and Retail Warehouse Facility, Warehouse Membership Club, Building Supply Outlet in an enclosed building);
- C. Maximum 2.0 metres from the east lot line (for all other uses).

(Page 103 of 247)

- iii) Maximum Building Height
- 12.0 metres.
- iv) Additional
 Regulations for
 buildings fronting on
 Upper Mount Albion
- A. Minimum built frontage shall not be less than 30% of the total distance of the street frontage within 210.0 metres of Paramount Drive.
- B. Maximum building depth shall be 25.0 metres within 210.0 metres of Paramount Drive.
- v) Built Form

Each use, other than an accessory use, shall be contained in a building having all of its customer access doors opening directly outdoors and shall not open another onto store or unenclosed corridor.

- vi) Landscaped Area
- A. Minimum Landscaped Open Space shall be 15% of the lot area, a portion which shall include the following where appropriate:
 - A planting strip having a minimum width of 6.0 metres shall be provided adjacent to any public street, except for points of ingress and egress, and between the street and any building along the east lot line; and,
 - A minimum width of 7.5 metres shall be provided adjacent to the north and west

(Page 104 of 247)

property lines.

vii) Parking

- A. 4.5 spaces for each 93.0 square metres; and,
- B. No parking space or part thereof shall be located and no land shall be used for the temporary parking or storage of any motor vehicle at a distance of less than 6.0 metres from the east and south lot lines or closer than 7.5 metres from the nor than west lot lines.
- viii) Additional
 Regulations for
 Wholesale and Retail
 Warehouse Facility,
 Warehouse
 Membership Club,
 Building Supply
 Outlet in an enclosed
 building and
 Retail Establishments
- A. 28,335 square metres Maximum Total Gross Floor area;
- B. In addition to Clause A., 14,500 square metres Maximum Gross Floor Area per unit;
- C. In addition to Clause A., 1,860 square metres Minimum Gross Floor Area per unit; and,
- D. Notwithstanding Clause 1., for every square metre of office space built in excess of 2,272 square metres in Area A, an

(Page 105 of 247)

equal amount of retail space will be permitted to a maximum of 2,272 square metres.

- c) For the purposes of Special Exception No. 319 the following special provisions shall apply to <u>Area B</u> as shown on Figure 8 of Schedule "F" – Special Figures:
 - 1. Notwithstanding Subsection 10.5.1, the permitted uses shall be limited to the following:
 - i) Art Galleries
 - ii) Commercial Recreation
 - iii) Commercial School
 - iv) Commercial Entertainment
 - v) Conference or Convention Centre
 - vi) Convenience Food Stores
 - vii) Day Nursery
 - viii) Dry Cleaning or Laundering Establishments
 - ix) Financial Establishment
 - x) Libraries
 - xi) Medical Clinics
 - xii) Offices
 - xiii) Personal Services
 - xiv) Private Club or Lodge
 - xv) Restaurant.
 - 2. Notwithstanding Subsections 5.1.a) v), 10.5.3a), b), c) and g) v) the following regulations shall apply:
 - i) Maximum Lot Coverage 25%
 - ii) Minimum Gross Floor Area 1,000 square metres. for Office
 - iii) Maximum Front Yard

 2.0 metres shall be provided for those buildings along Upper mount Albion Road.
 - iv) Minimum Side Yard 6.0 metres shall be provided along Paramount Drive.
 - v) Maximum Side Yard 3.0 metres along the proposed street.

(Page 106 of 247)

vii) Minimum Rear Yard

6.0 metres shall be provided along Winterberry Drive.

viii) Landscape Requirements

A planting strip having a minimum width of 6.0 metres shall be provided adjacent to any street, except for points of ingress and egress, and between the street and any building along Upper Mount Albion Road and the north limits of Area B as shown in Figure 8 of Schedule "F".

ix) Parking

In addition to Section 5 of this By-law, no parking space or part thereof shall be located and no land shall be used for the temporary parking or storage of any motor vehicle at a distance of less than 6.0 metres from any street line.

 Additional Regulations for buildings fronting on Upper Mount Albion The minimum built frontage shall be 20% of the total distance of the street frontage in any one block.

xi) Built Form

Each use, other than an accessory use, shall be contained in a building having all of its customer access doors opening directly outdoors and shall not open onto another store or unenclosed corridor.

(Page 107 of 247)

- d) For the purposes of Special Exception No. 319 the following special provisions shall apply to <u>Area C</u> as shown on Figure 8 of Schedule "F" – Special Figures:
 - 1. Notwithstanding Subsection 10.5.1, the permitted uses shall be limited to the following:
 - i) Day Nursery
 - ii) Financial Establishment
 - iii) Home Business
 - iv) Multiple Dwelling
 - v) Office
 - vi) Personal Service Establishment
 - vii) Restaurant
 - viii) Studio
 - 2. Notwithstanding Subsections 5.6 c), 10.5.3a), b). c), d), e), f), h), and k) ii), the following regulations shall apply:

i)	Minimum Lot Area	1,200 square metres
ii)	Minimum Lot Frontage	20.0 metres
iii)	Maximum Lot Coverage	30 percent
iv)	Maximum Gross Floor Area	600.0 square metres
v)	Maximum Front Yard	3.0 metres
vi)	Minimum Interior Side Yard	3.0 metres
vii)	Maximum Exterior Side Yard	3.0 metres
viii)	Minimum Rear Yard	9.0 metres
ix)	Maximum Building Height	13.5 metres or 3 storeys
x)	Restriction of Commercial Uses	No commercial uses are permitted except where contained jointly with

multiple dwelling units in the

(Page 108 of 247)

same building.

- xi) Maximum Residential Density
- 80 units per hectare.
- xii) Minimum Amenity Area per Dwelling Unit
- A. 14.0 square metres per Bachelor Unit;
- B. 18.0 square metres per One Bedroom Unit;
- C. 53.0 square metres per Two Bedroom Unit; and,
- D. 88.0 square metres per Three Bedroom Unit.
- E. 125.0 square metres per Four Bedroom Unit
- xiii) Minimum Landscaped Open Space
- A. A Landscaped Area shall not be less than 50 percent of the lot area of which at least 25 percent shall be in one area other than the front yard;
- B. A portion of the landscaped area shall be a planting strip having a minimum width of 3.0 metres provided adjacent to any street, except for points of ingress and egress, and between the street and any building along Upper Mount Albion Road and the south lot line.
- xiv) Outdoor Storage

Outdoor Storage shall be prohibited.

xv) Parking

A. In accordance with Section 5 of this By-law;

(Page 109 of 247)

- B. Notwithstanding A. above, 1.5 spaces shall be provided per dwelling unit.
- e) For the purposes of Special Exception No. 319 the following special provisions shall apply to **Area D** as shown on Figure 8 of Schedule "F" Special Figures:
 - 1. For lands located in Area D-1, D-2, and D-3, notwithstanding Subsection 10.5.1, permitted uses shall be limited to the following:
 - i) Dwelling Groups
 - ii) Home Business
 - iii) Live/Work Units
 - iv) Multiple Dwelling
 - v) Townhouses
 - 2. For lands located in Area D-4, notwithstanding Subsection 10.5.1, permitted uses shall be limited to the following:
 - i) Dwelling Groups
 - ii) Home Business
 - iii) Live/Work Units
 - iv) Multiple Dwelling
 - v) Townhouses
 - 3. Notwithstanding the definition of Front Lot Line in Section 3: Definitions of this By-law, the definition of the Front Lot Line shall mean any lot line of the lot abutting Artfrank Drive.
 - 4. Notwithstanding Subsections 4.6d), 10.5.3a), b), c), d), gii) and iii), and h), the following regulations shall apply:
 - i) Minimum Yard Depth 1.5 metres from the from Daylight Triangle hypotenuse of the daylight triangle
 - ii) Yard Projection of a A porch may project a Porch maximum of 4.5 metres into any required rear yard and 1.6 metres into any required side yard.

(Page 110 of 247)

iii)	Maximum Setback
	Abutting a Street

6.6 metres, except that the maximum setback from the south lot line shall not apply to a Multiple Dwelling.

iv) Minimum Interior Side Yard for Townhouses and Dwelling Groups: 3.0 metres, except that a minimum 9.0 metres shall be provided and maintained for the easterly townhouse block adjacent to lands zoned Mixed Use Medium Density (C5, SE 319) Zone, with a Special Exception, known municipally as 182 and 188 Upper Mount Albion Road.

v) Side Yard for Multiple Dwellings

1. Minimum Interior

9.0 metres

2. Maximum Exterior

6.7 metres

vi) Minimum Rear Yard for Multiple Dwellings

8.8 metres

vii) Maximum Density

200 units per hectare

viii) Maximum Building
Height of Townhouse,
Maisonette, Live/Work
Units, and/or Dwelling
Groups located in Area
D-4

3 storeys or 13.5 metres

ix) Maximum Building Height for Apartment Buildings

Area D-1: 7 storeys or 24.1 metres, however the building shall be stepped in from both ends of the building a minimum of 3.0 metres for each

(Page 111 of 247)

storey above 16 metres of building height.

Area D-2: 12 Storeys or 40.6 metres

Area D-3: 8 storeys or 27.4 metres

x) Privacy Areas

Notwithstanding the yard requirements above, each maisonette and townhouse unit shall have at least one area which serves as a privacy area which shall be adjacent to the dwelling unit and shall have a minimum depth of 2.5 metres.

- xi) Minimum Landscape Area
- 39.0 percent
- xii) Subsection 10.5.3h) shall not apply.
- 5. Notwithstanding Subsections 5.2b)i), ii), and iii), 5.2f), and 5.6c) the following regulations shall apply:
 - i) Minimum Parking Space Size Dimensions

For other than 90 degree perpendicular parking parking spaces and for spaces within private residential garages designed to accommodate one motor vehicle, parking space shall not be less than 2.6 metres in width or less than 5.5 metres in length exclusive of any land used for access, manouvering, driveways, or a similar purpose.

ii) Projections into Parking Spaces

In addition to Clause i), a single step, hose bibs, electrical devices and/or

(Page 112 of 247)

ductwork and closet enclosures may project not more than 0.3 metres into the required length or width of a parking space.

iii) Barrier-Free Parking Requirements

At least 1 percent of the required parking spaces, with a minimum of one parking space, on any parking lot having more than 10 parking spaces shall have a minimum rectangular dimension of 4.4 metres by 5.5 metres.

iv) Parking Restrictions in Residential Zones

Parking spaces shall have a width of not less than 2.6 metres and a length of not less than 5.5 metres and barrier free parking spaces shall have a width of not less than 4.4 metres and a length of not less than 5.5 metres, exclusive of any land used to permit ingress or egress to said parking manouvering spaces. areas, driveways or aisles. One parking space within a private residential garage shall not be less than 2.6 metres in width or less than 5.5 metres in length.

- v) Parking Requirement for Townhouse / Maisonette Dwellings
- 2.1 spaces per unit, which includes visitor spaces.
- vi) Parking Requirement for Bachelor / One Bedroom Multiple Dwelling Units
- 1.55 spaces per unit, which includes visitor spaces.
- vii) Parking Requirement for Two Bedroom Multiple Dwelling Units
- 1.8 spaces per unit, which includes visitor spaces.

(Page 113 of 247)

shall each be increased by 1.0 metre for each 3.0

viii) Parking Requirement for Three Bedroom Multiple **Dwelling Units**

2.05 spaces per unit, which includes visitor spaces.

Parking Location ix)

Where there is a grouping of three or more parking spaces, no parking shall be provided closer than 0.9 metres to any dwelling unit located on the same lot, except that the provisions of this clause shall not apply to any parking space located within underground an garage.

- f) For the purposes of Special Exception No. 319 the following special provisions shall apply to Area E as shown on Figure 8 of Schedule "F" -Special Figures:
 - 1. Notwithstanding Subsection 10.5.1, permitted uses shall be limited to the following:
 - i) Home Business
 - ii) Multiple Dwelling
 - Stormwater management facility iii)
 - 2. Notwithstanding Subsections 5.1a) v), 5.6 c), 10.5.3 a), b), c), d), and h, the following regulations shall apply:

i)	Minimum Lot Area	4,000 square metres
ii)	Minimum Lot Frontage	45.0 metres
iii)	Minimum Front Yard	7.5 metres
iv)	Minimum Side Yard	7.5 metres
v)	Minimum Flankage Yard	9.0 metres
vi) vii)	Minimum Rear Yard Increased Yards	7.5 metres Notwithstanding iii) – vi) above, Front yard, side yard and rear yard requirements

(Page 114 of 247)

metres or part thereof by which the building exceeds a height of 15 metres.

viii) Maximum Lot Coverage 35 percent

- ix) Maximum Residential 100 dwelling units per Density hectare
- x) Maximum Building 25 metres Height
- xi) Minimum Landscaped A. Open Space
- The landscaped area shall not be less than 50 percent of the lot area of which at least 25 percent shall be in one area which is not the front yard
- B. A planting strip having a minimum width of 4.5 metres shall be provided and thereafter maintained adjacent to every portion of any lot that abuts a street except for points of ingress and egress.
- xii) Minimum Distance between Residential Buildings on the Same Lot

21.0 metres

- xiii) Minimum Amenity Areas per Dwelling Type
- A. 1.5 square metres per bachelor unit;
- B. 2.0 square metres per one bedroom unit;
- C. 3.0 square metres per two bedroom unit;
- D. 4.0 square metres per

(Page 115 of 247)

three bedroom unit;

- E. 4.0 square metres per four bedroom unit; and,
- F. In addition to Clauses A.-E., not less than 10 percent of the total of the amenity areas provided shall be inside the applicable multiple dwelling building, such and inside area shall not be less than 93.0 square metres.

xiv) Parking

- A. 1.25 parking spaces and 0.35 visitor parking spaces for each bachelor or one bedroom multiple dwelling unit;
- B. 1.5 parking spaces and 0.35 visitor parking spaces for each two bedroom multiple dwelling unit;
- C. 1.75 parking spaces and 0.35 visitor parking spaces for each multiple dwelling unit having three or more bedrooms;
- D. No common parking space shall be located closer than 3.0 metres from a single detached, semidetached or duplex residential zone; and,

(Page 116 of 247)

E. At least 60 percent of the required tenant parking shall be underground and/or within the multiple dwelling.

Underground parking shall not be bound by setback requirements; however underground parking above grade shall be setback a minimum of 3.0 metres from any lot line.

- g) For the purposes of Special Exception No. 319 the following special provisions shall apply to <u>Area F</u> as shown on Figure 8 of Schedule "F" – Special Figures:
 - 1. Notwithstanding Subsection 10.5.1, permitted uses are limited to the following:
 - i) Botanical Gardens
 - ii) Cemeteries
 - iii) Conservation Uses
 - iv) Fishing Preserves
 - v) Golf Courses
 - vi) Hazard Lands
 - vii) Nature Trails
 - viii) Public and Private Parks
 - ix) Public Greenhouses
 - x) Wildlife Management Areas
 - xi) Woodlots

iv)

2. Notwithstanding Subsections 10.5.3a), b) and c), the following regulations shall apply:

15.0 metres:

i)	Maximum Lot Coverage	20 percent;
ii)	Minimum Front Yard	15.0 metres;
iii)	Minimum Side Yard	15.0 metres;

Minimum Rear Yard

(Page 117 of 247)

v)	Minimum Landscaped Area	75 percent of the lot area;
vi)	Outdoor Storage	No outdoor storage shall be permitted.
vii)	Parking	In accordance with Section 5 of this Bylaw.

- 320. Within the lands zoned District Commercial (C6) Zone, identified on Maps 1434 and 1435 of Schedule "A" Zoning Maps and described as 1060, 1080, 1090, 1096, 1100, 1110, 1122, 1130, 1136, 1142, 1144, 1146 and 1147 Wilson Street West and 1051 Garner Road West, the following special provisions shall apply:
 - a) In addition to Subsection 10.6.2, the following uses shall also be prohibited:
 - i) Welding and Sheet Metal Shop.
 - b) In addition to Subsection 10.6.1, the following uses shall also be permitted:
 - i) Home Improvement Supply Establishment
 - ii) Building and Lumber Supply Establishment
 - c) In addition to Subsection 10.6.3 f) the maximum gross floor area for all buildings shall be 38,000 square metres, including any garden centre which is located in a permanent building or structure, but excludes Hotel, Motor Vehicle Gas Bar and Motor Vehicle Car Washing Establishment.
 - d) Subsections 10.6.3 g) ii) and iii) shall not apply for individual new buildings with a maximum gross floor area of 500 square metres.
 - e) Notwithstanding Subsection 10.6.3 j), the following outdoor storage regulations shall apply:
 - Outdoor storage shall not be permitted in any minimum yard abutting a street;
 - ii) Outdoor storage shall be located a minimum of 3 metres from any side or rear yard not abutting a street;

(Page 118 of 247)

- iii) Outdoor storage shall be screened from view from any street by way of a minimum 1.5 metre decorative, solid board fence, or a minimum 3 metre planting strip; and,
- iv) Outdoor storage areas shall not exceed an area equal to 4% of the gross floor area of the building to which it is accessory.
- 321. Within the lands zoned Community Commercial (C3) Zone, identified on Map 1295 of Schedule "A" Zoning Maps and described as 902 Mohawk Road East, the following special provision shall apply:
 - a) Notwithstanding Subsection 10.3.1 and in addition to Subsection 10.3.2, a Restaurant shall be prohibited.
- 322. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 912 of Schedule "A" Zoning Maps and described as 401.5 Barton Street East, the following special provision shall apply:
 - a) Notwithstanding Subsection 10.5a.1, existing residential uses shall also be permitted on the ground floor.
- 323. Within the lands zoned Neighbourhood Commercial (C2) Zone, identified on Map 1306 of Schedule "A" Zoning Maps and described as 604 Highway No. 8, the following special provisions shall apply:
 - a) Notwithstanding Subsection 10.2.1, the permitted uses shall be located within the existing heritage building and shall be limited to the following:
 - i) Medical clinic
 - ii) Professional office
 - iii) One (1) accessory dwelling unit, provided such use is located together with a permitted commercial use within the same heritage building and is not located on the ground floor or in the cellar or basement
 - b) Notwithstanding Subsections 10.2.3b), d) and j), the following regulations shall apply:
 - vii) Existing heritage building

The external appearance and height, comprising of the entire north, west and east facades and hip roof, and all associated building material and architectural features of the two-and-one-half storey heritage structure, shall be preserved and maintained. These materials and features include, but are not limited to, the high stone foundation, wrap-

(Page 119 of 247)

around verandah, entranceways and doors, windows and leaded glass, stone sills and lintels, brickwork, chimneys, cross gables and hip roof and all associated decorative woodwork existing on November 27, 2002.

viii) Landscaped strip

The minimum landscaped strip along the east property line and the rear lot line, between the east property line and detached garage, shall be 2.5 metres.

- iii) Minimum Rear Yard Setback
- 1.5 metres.
- 324. Within the lands zoned Neighbourhood Commercial (C2) Zone, identified on Map 1436 of Schedule "A" Zoning Maps and described as 21 Panabaker Drive, the following special provisions shall apply:
 - a) In addition to Subsection 10.2.1, the following uses shall also be permitted:
 - i) Establishments providing Education or Instructional Services
 - ii) Gymnasiums or Health Clubs excluding body rub parlours
 - iii) Medical and Dental laboratories
 - iv) Printing Establishment
 - v) Retail, excluding adult-oriented video rental outlets and similar retail outlets
 - vi) Service shop
 - vii) Sub-Post Office
 - b) In addition to Subsection 3, for the purpose of Special Exception No. 324 the following definition shall apply:

Sub-Post Office

Means a Government of Canada postal substation or a commercial parcel pick-up and delivery service.

- c) Notwithstanding Subsections 5.6 c) and 10.2.3 h), the following regulations shall also apply:
 - i) A fast food restaurant shall not exceed more than 40% of the total Gross Floor Area.
 - ii) Gymnasiums or Health Clubs, excluding Body Rub Parlours, shall not exceed more than 40% of the total Gross Floor Area.

(Page 120 of 247)

- iii) A Medical Clinic shall not exceed more than 40% of the total Gross Floor Area.
- iv) Medical and Dental Laboratories shall not exceed more than 35% of the total Gross Floor Area.
- v) A Restaurant shall not exceed more than 25% of the total Gross Floor Area.
- vi) A minimum of 1 parking space for every 22 square metres of Gross Floor Area for all permitted uses shall be provided.
- 325. Within the lands zoned Neighbourhood Commercial (C2) Zone, identified on Map 1247 of Schedule "A" Zoning Maps and described as 2791 King Street East, the following special provisions shall apply:
 - In addition to Subsection 10.2.1, an existing parking lot in conjunction with an existing medical clinic located at 2803 King Street East shall also be permitted.
 - b) Notwithstanding 5.2b), 5.2f) and 5.2i), the following regulations shall also apply:
 - i) Parking Space Size A minimum parking space size
 Dimension dimension of 2.6 metres by 5.5
 metres shall be provided.
 - ii) Barrier Free Parking A minimum barrier free parking Space Size Dimension space size dimension of 4.4 metres by 5.5 metres shall be provided.
 - iii) Minimum Aisle Width A minimum aisle width with a 90 degree angle to a parking space shall be 5.5 metres.
- 326. Within the lands zoned District Commercial (C6) Zone, identified on Maps 549, 581, 582, 612 of Schedule "A" Zoning Maps and described as Clappison's Corner, shown as Figure 9 of Schedule "F" Special Figures, the following special provisions shall apply:

Appealed by Appellant No. 7 (Canadian Tire Real Estate Limited (CTREL)) for 11 Clappison Avenue only.

a) In addition to Subsection 10.6.1, the following uses shall also apply:

Automotive Convenience Centre

(ii) Commercial Entertainment

(iii) Commercial Recreation

(Page 121 of 247)

	(Page 121 of 247)
iv)	Commercial School
v)	Conference or Convention Centre
vi)	Day Nursery
vii)	Dry Cleaning Distribution Station
viii)	Dry Cleaning Establishment
ix)	Financial Institution
x)	Funeral Home
xi)	(Hotel)
xii)	Industrial Research and Development Establishment
xiii)	Medical Clinic
xiv)	Mini Storage uses within a wholly enclosed building(s) with no
	associated outdoor storage
xv)	Motel
xvi)	Motor Vehicle Gas Bar
xvii)	Motor Vehicle Service Station
xviii)	Motor Vehicle Washing Establishment
xix)	Office
xx)	Outdoor Storage Areas associated with Garden Centre and
	Home Improvement/Building Supplies Establishment
xxi)	Personal Service
xxii)	Printing Establishment
xxiii)	Restaurant
	Retail
	Warehouse
	Wholesale and Retail Warehouse Facility
xxvii)	Wholesale Membership Club
xxviii)	Veterinary Service

- b) Notwithstanding Subsections 10.6.3a), b), c) i), d), f), and g) ii), iii), iv), v), and in addition to Subsection 10.6.3 i) and j), the following regulations shall apply:
 - i) Minimum Lot Frontage 30 metres.
 - (ii) Minimum Lot Area 1,240 square metres. Restaurant
 - (iii) Minimum Lot Area All (1,500 square metres.) Other Uses
 - (Naximum Lot Coverage) 30% except a lot with only Business, Professional, or Administrative Office use or uses shall be permitted a maximum lot coverage of 50%.
 - v) Yard Abutting a 3.0 metres. streetline other than a

(Page 122 of 247)

Provincial Highway

- vi) Minimum Yard Abutting 14.0 metres. a Provincial Highway
- vii) Minimum Interior Side Yard
- 3.0 metres, but 15 metres where abutting any Open Space or Conservation Management Zone within By-law 05-200 or By-law 90-45-Z.
- viii) Minimum Rear Yard but abutting a streetline or Provincial Highway
- 6.0 metres.
- ix) Maximum Height
- 15.0 metres.
- x) Minimum Planting Strip
- 1. 6.0 metres width across all lot lines abutting a street except 3.0 metres where a building is located adjacent to a street.
- 2. Applicable only to Block B on Figure 9 of this By-law, a transformer is permitted to be located within the required Planting Strip.
- xi) Provision of Visibility Triangle

Notwithstanding the regulations in Clauses i) to ix), a minimum 15 metre by 15 metre landscaped triangle shall be provided and maintained for corner lots with one streetline on Dundas Street East. and a minimum 12 metre by 12 metre landscaped triangle shall be provided and maintained for corner lots in all other cases, which shall be suitably landscaped and designed to provide an attractive appearance. The required 15 metre by 15 metre landscaped triangle shall also include a gateway feature which shall be defined through site plan approval.

xii) Maximum Total Gross 71,000 square metres.

(Page 123 of 247)

Floor Area for all uses excluding Motel, Hotel, Community Centre and Public Uses Blocks 1 and 2 Combined.

- xiii) Maximum Total Gross 7,000 square metres.
 Floor Area for all uses
 excluding Motel, Hotel,
 Community Centre and
 Public Uses Block 3.
- xiv) Maximum Total Gross 30,000 square metres.
 Floor Area for all uses
 excluding Motel, Hotel,
 Community Centre and
 Public Uses Block 4
- Maximum Total Gross 31,000 square metres.
 Floor Area for all uses
 excluding Motel, Hotel,
 Community Centre and
 Public Uses Block 5
- xvi) Regulation on Door Openings

Each use other than accessory uses shall be contained in a building having all of its customer access doors opening directly outdoors and shall not open onto another store or an unenclosed corridor.

- vvii) Open Storage requirements
- 1. Refuse containers are permitted to be located in an exterior side yard for Block B of Figure 9.
- 2. All outdoor storage, including a garden centre and a home improvement /building supplies area, shall be permitted provided that they are screened from view.

(Page 124 of 247)

xviii) Limitation on Mini-Storage Use

For Blocks C, D, and E only, notwithstanding i) above, only one Mini-Storage use shall be permitted and only if setback of 150 metres from both Highway No. 5 (Dundas Street East) and from Highway No. 6 For lands located within Blocks A and B, only one Mini-Storage use shall be permitted and only if setback a minimum of 150 metres from Highway No. 5 (Dundas Street East) and setback a minimum of 100 metres from Highway No. 6.

- xix) Minimum Yard for Motor Vehicle Gas Bar Canopies from the lot line.
- 3.5 metres.
- c) Notwithstanding Subsections 5.2c), 5.2f), 5.2.1 b) and 5.6 c), the following special parking and loading regulations shall apply:
 - i) Minimum Parking
 Requirements not including Motel, Hotel,
 Community Centre,
 Exhibition Conference
 Hall, and Public Use
- 1. 5.0 spaces per 100 square metres of Gross Floor Area.
- 2. Notwithstanding Clause 1., a minimum 1.0 space per 30 square metres of Gross Floor Area for Block B of Figure 9.
- ii) Loading Requirements

For Block B of Figure 9, for a building or structure with a total floor area of over 7,000 square metres, 3 loading spaces shall be provided and maintained, and that loading spaces are permitted to be located within an exterior side yard.

- Parking Space Size Dimension
- A minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided.
- (iv) Barrier Free Parking Space Size Dimension

A minimum barrier free parking space size dimension of 4.4 metres by 5.5 metres shall be provided.

(Page 125 of 247)

d) In addition to Subsection 3: Definitions, for the purposes of Special Exception No. 326 the following definition shall apply:

Warehouse Membership Club A building with a minimum Gross Floor Area of 7,000 square metres, occupied by a single user, where the principal use is the sale of food and non-food products which are generally stored, displayed and offered for sale in one and the same area in a warehouse format and where customers, whether retail or wholesale, are generally required to be members of the club, but excludes department stores and supermarkets.

Automotive
Convenience Centre

Shall mean a single building, containing more than one individual outlet, with a minimum Gross Floor Area of 465 square metres and a maximum of 1,050 square metres and which contains a gas bar and/or car wash on the same lot and which building is designed, developed, and maintained by the owner of the lot and the use of which may include a combination of individual outlets which may include a maximum of 1 convenience retail outlet and a maximum of 2 restaurants (including standard, convenience and fast) food), regardless of whether such outlets are separately leased and have customer access from inside or outside the Automotive Convenience Centre.

- e) That the remaining Subsections in 10.6 shall also apply.
- 327. Within the lands zoned Arterial Commercial (C7) Zone, identified on Maps 1552 and 1597 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number
135, 139 and 143 Upper Centennial	1552 and 1597
Parkway	
151 Upper Centennial Parkway	1552

The following special provisions shall apply:

- a) In addition to Subsection 10.7.1 and notwithstanding Subsection 10.7.2, the following uses shall also be permitted:
 - i) Beverage Making Establishment

(Page 126 of 247)

- ii) Catering Service
- iii) Commercial School
- iv) Communications Establishment
- v) Craftsperson Shop
- vi) Day Nursery
- vii) Dwelling Units(s)
- viii) Financial Establishment
- ix) Laboratory
- x) Medical Clinic
- xi) Multiple Dwelling
- xii) Office
- xiii) Personal Services
- xiv) Place of Assembly
- xv) Retail
- xvi) Social Services Establishment
- xvii) Studio
- xviii) Urban Farmers Market
- b) The regulations pertaining to the uses identified in Clause a) shall be in accordance with Subsection 10.7.3.
- c) Notwithstanding Clause b), the uses identified in Clauses a) vii) and a) xi), shall also be subject to the following regulation:

Restriction of Uses within a Building

The following uses shall only be permitted above the ground floor except for access, accessory office and utility areas, and shall not, as a stand-alone use or in combination, occupy more than 50% of the total gross floor area:

Dwelling Unit(s) Multiple Dwelling Office

- 328. Within the lands zoned Neighbourhood Commercial (C2) Zone, identified on Map 1388 of Schedule "A" Zoning Maps and described as part of 515, 523, 527 and 535 Garner Road East, the following special provision shall apply:
 - a) Notwithstanding Subsection 10.2.3 h), the maximum gross floor area for commercial uses shall be 1,800.0 square metres.
- 329. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 1178 and 1179 of Schedule "A" Zoning Maps and described as 1173 and 1203 Old Golf Links Road, the following special provisions shall apply:

(Page 127 of 247)

a) Notwithstanding Subsections 10.5.3 a), b), c), d) and g) and 5.1 a) v), the following regulations shall apply:

i)	Maximum Lot Coverage	60%;
ii)	Minimum Front Yard Setback	15.0 metres, except 5.0 metres to a canopy, 1.5 metres to a below-grade parking structure, and 1.5 metres to an above-grade parking structure;
iii)	Minimum Side Yard Setback	1.5 metres, except 1.5 metres to a below-grade parking structure, and 6.5 metres to an above- grade parking structure;
iv)	Minimum Rear Yard Setback	1.5 metres, except 0.3 metres to a below-grade parking structure, and 0.9 metres to an above- grade parking structure;
v)	Maximum Height	22.0 metres and 6 storeys.
vi)	Parking Regulation	A minimum of 301 parking spaces shall be provided and maintained for a Hotel containing a maximum of 113 units and Offices with a maximum gross floor area of 7,397 square metres;
vii)	Parking Location	No parking space shall be located closer to a street line or a lot line not abutting a street than 0.3 metres.

- 330. Within the lands zoned Neighbourhood Commercial (C2) Zone, identified on Maps 1448 and 1497 of Schedule "A" Zoning Maps and described as 741 Rymal Road East, the following special provisions shall apply:
 - a) Notwithstanding Subsections 10.2.1, 10.2.3 f), g) and h), only a mixeduse building comprised of residential units above commercial uses on the ground floor shall be permitted, subject to the following special provisions:
 - i) Permitted Residential Uses:

(Page 128 of 247)

- A. One dwelling unit for each 180.0 square metres of area of the lot which the building is situated, provided that the building does not exceed 2 storeys in height, and the gross floor area (GFA) of the building used for dwelling units shall be at least equivalent to the Commercial GFA and shall not exceed 455.0 square metres.
- ii) Permitted Commercial Uses:
 - A. Commercial School
 - B. Office
 - C. Financial Establishment
 - D. Day Nursery
 - E. Private Club, Lodge, Fraternity or Sorority House or Labour Union Hall
 - F. Restaurant which shall not include an outdoor commercial patio, and/or any dancing or other entertainment except music
 - G. Retail
 - H. Photographer's or Artist's Studio, but not including a motion picture studio
- b) Notwithstanding the height requirement in Subsection 4.19, Subsections 10.2.1 a) and I), and in addition to Subsections 10.2.3 k), the following regulations shall also apply:

i)	Storage	Storage	or	goods	to	be
		manufactu	ıred,	assembled,	or	sold
				ses shall be cellar of the b	•	

ii) Minimum Front Yard 6.0 metres

iii) Access No vehicular ingress or egress shall be permitted from the subject lands

onto Eva Street and/or Eaglewood

Drive.

iv) Garbage Areas Any garbage areas shall be contained

entirely within the principal building.

v) Visual Barrier 2.1 metres Minimum Height

(Page 129 of 247)

- 331. Within the lands zoned Neighbourhood Commercial (C2) Zone, identified on Maps 1242 and 1295 of Schedule "A" Zoning Maps and described as 788 Upper Ottawa Street, the following special provisions shall apply:
 - a) Notwithstanding Subsections 5.2b), 5.2f), 10.2.3 a), b) ii), c) ii) and d), the following regulations shall apply:

the following regulations shall apply:			
i)	Minimum Front Yard	0.0 metres;	
ii)	Minimum Setback from Residential Zone	9.0 metres;	
iii)	Maximum Building Height	3-storeys and / or 13.0 metres;	
iv)	Minimum Loading Requirements	No loading space shall be required.	
v)	Restriction of Uses within a Building	 Commercial uses shall only be permitted on the ground floor of a mixed-use building; and, 	
		 Residential units, to a minimum of 4 dwelling units and a maximum of 8 dwelling units, shall be required above any use permitted on the ground floor. 	
vi)	Access Driveway	An access driveway shall be located not less than 1.5 metres from the common boundary with a Residential Zone.	
vii)	Parking Space Size Dimension	A minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided.	
viii)	Barrier Free Parking Space Size Dimension	A minimum barrier free parking space size dimension of 4.4 metres by 5.5 metres shall be provided.	

332. Within lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 909 of Schedule "A" - Zoning Map and described as part of Part of 100 and 120 Ray Street North, and 337 and 339 York Boulevard, following special provisions shall also apply:

(Page 130 of 247)

a) Notwithstanding the definition of Front Lot Line in Section 3: Definitions, the following definition shall apply:

Front Lot Line: Shall mean any lot line of the lot abutting York Boulevard.

- b) Notwithstanding Subsection 10.5.3 d) ii) the maximum height shall be 53.0 metres.
- 333. Within those lands zoned Neighbourhood Commercial (C2) Zone, identified on Map 1389 of Schedule "A" Zoning Maps and described as 587 Garner Road East, the following special provisions shall apply:
 - a) In addition to Subsection 10.2.1, a retail showroom for a spa and pool business with accessory offices and storage areas shall also be permitted.
 - b) In addition to Subsection 10.2.3, the maximum floor area for the use identified in Clause a) shall be 610.0 square metres.
 - c) Notwithstanding Subsection 4.8, accessory buildings existing as of February 8, 2012 shall be permitted.
- 334. Within the lands zoned Community Commercial (C3) Zone, identified on Map 1259 of Schedule "A" Zoning Maps and described as 1365 and 1367 Baseline Road, the following special provisions shall apply:
 - a) In addition to Subsection 10.3.1, Commercial Recreation shall also be permitted.
 - b) In addition to Subsection 10.3.2, a Drive-Through Facility shall also be prohibited.
 - c) Notwithstanding Subsections 5.2b), 5.2f), 5.6c), 10.3.3 a), d), and j), the following regulations shall apply:

i) Minimum Front Yard 4.0 metres	iviinimui	m Front Yard	4.0 metres;
----------------------------------	-----------	--------------	-------------

ii) Minimum Flankage Side 1.3 metres;

iii) Maximum Building Height 11.5 metres;

iv) Minimum Landscape Open A. The landscaped area shall not be less than 30 percent of the lot area;

(Page 131 of 247)

- B. A landscaped strip having a minimum width of 1.3 metres and an average width of 3.0 metres shall be provided and maintained along North Service Road, and a landscape strip having a minimum width of 4.0 metres shall be provided and maintained Baseline along Road. except for points of ingress and egress;
- C. A landscape strip having a minimum width of 2.0 metres with a minimum 1.8 metre high board-on-board fence shall be provided and maintained adjacent to every portion of any lot line that abuts any zone other than a Commercial or Industrial Zone.
- v) Minimum Barrier Free Parking Requirements

A minimum of 2 of the required spaces shall be barrier free spaces.

vi) Minimum Loading Requirements

A minimum of one loading space shall be provided and maintained.

vii) Restriction of Uses within a Building

No commercial uses are permitted, except on the ground floor where contained jointly with apartment dwelling unit(s) in the same building, provided that the gross floor area of the building used for commercial purposes does not exceed the floor area being used for residential purposes, including residential common areas.

(Page 132 of 247)

viii)	Parking Space Size Dimension	A minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided.
ix)	Barrier Free Parking Space Size Dimension	A minimum barrier free parking space size dimension of 4.4 metres by 5.5 metres shall be provided.

- 335. Within the lands zoned Community Commercial (C3) Zone, identified on Map 1594 of Schedule "A" Zoning Maps and described as 1962, 1970 and 1976 Rymal Road East, the following special provisions shall apply:
 - a) In addition to Subsection 10.3.1 and notwithstanding Subsections 10.3.2, the following uses shall also be permitted:
 - i) Drive-Through Facility
 - ii) Nursery school
 - iii) Service Shop
 - b) Notwithstanding the definition of Front Lot Line in Section 3: Definitions, and Subsections 10.3.3 a), b), c), d), g) and i) and 5.6 c), the following regulations shall also apply:

i)	Maximum Lot Coverage	30%
ii)	Total Maximum Gross Leasable Floor Area	2,500 square metres
iii)	Maximum Gross Leasable Floor Area for each individual establishment	Not more than one half of the total gross leasable floor area provided on the site.
iv)	Maximum Gross Floor Area for a Medical Clinic	555.0 square metres
v)	Minimum Front Yard	7.5 metres
vi)	Minimum Interior Side Yard	3.0 metres
vii)	Minimum Exterior Side Yard	4.5 metres

(Page 133 of 247)

viii) Minimum Rear Yard 10.0 metres

ix) The lot line that abuts Rymal Road East shall be deemed to be the front lot line.

x) Maximum Height 14.0 metres

xi) Minimum Number of One (1) space for each 18.0 square metres of gross floor

area or fraction thereof.

336. Within the lands zoned District Commercial (C6) Zone, identified on Maps 1199, 1200 and 1450 of Schedule "A" – Zoning Maps and described as:

Property Address	Map Number
621, 625 Barton Street and 311,	1199, 1200
315, 327, 331 Fruitland Road	
1120 Stone Church Road East	1450

The following special provision shall apply:

- a) In addition to Subsection 10.6.1, a Warehouse shall also be permitted.
- 337. Within the lands zoned District Commercial (C6) Zone, identified on Maps 1911 and 1912 of Schedule "A" Zoning Maps and described as 10 Fall Fair Way, Part of 39 Garinger Crescent and 2490 Regional Road 56 the following special provisions shall apply:
 - a) In addition to Subsection 10.6.1 and notwithstanding Section 10.6.2, a Garden Centre shall also be permitted.
- 338. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 1595, 1596, 1639 and 1640 of Schedule "A" Zoning Maps and described as 2100, 2120, 2130, 2140, 2150, 2160, 2170, 2172, 2176, 2180, and 2190 Rymal Road East, the following special provisions shall apply:
 - a) In addition to Subsection 10.5.1 and notwithstanding Subsection 10.5.2, the following uses shall also be permitted:
 - i) Block townhouse dwelling
 - ii) Duplex dwelling
 - iii) Long Term Care Facility
 - iv) Semi-detached dwelling
 - v) Triplex dwelling
 - vi) Garden Centre
 - vii) Motor Vehicle Rental Establishment

(Page 134 of 247)

- b) In addition to Subsection 4.25 b) and Notwithstanding the definition of Front Lot Line in Section 3: Definitions and Subsections 5.1a)v), 5.2b), 5.2f), 5.2h), 5.6 c), 10.5.3a), b), c), d), g)ii) and iii), i) and k), the following regulations shall apply to all Commercial uses:
 - i) Minimum Front Yard 7.5 metres
 - ii) For the purposes of Special Exception No. 338, the lot line that abuts Rymal Road shall be deemed to be the front lot line.
 - iii) Minimum Side Yard

3 metres except:

- 1. 7.5 metres abutting a side lot line which is the boundary of any Residential or Institutional Zone or where ground floor residential use or an institutional use is located on the adjoining land; and
- 2. 7.5 metres on a corner lot for the side yard abutting the flankage street.
- iv) Minimum Rear Yard

7.5 metres, except where a rear yard abuts a street, Residential or Institutional Zone, a ground floor residential use or institutional use, the minimum yard shall be 9 metres.

v) Maximum Height

10.7 metres

- vi) Minimum
 Landscaping
 Requirements
- A. A landscaped area in the form of a planting strip having a minimum width of 4.5 metres and a fence having a minimum height of 1.8 metres shall be provided and thereafter maintained adjacent to every portion of any lot line that abuts a Residential or Institutional Zone or any Zone where the adjoining land use is used for residential or institutional purposes.
- B. A landscaped area having a minimum width of 4.5 metres shall be provided and thereafter

(Page 135 of 247)

maintained adjacent to every portion of any lot line that abuts a street, and such landscaped are shall be continuous except for the required driveway(s).

- vii) Outside Storage and Display
- A. Outside storage shall not be permitted in any front yard, however, the outside display of vehicles or plants accessory to the principal use on the subject lot may be permitted in the front yard.
- B. Outside storage and display areas shall not be permitted less than 4.5 metres from any street and/or the boundary of any Residential or Institutional Zone or any Zone where the adjoining land is used for residential or institutional purposes.
- C. Outside storage areas shall be screened from view and enclosed with a fence having a minimum height of 1.8 metres.
- viii) Maximum Gross Leasable Floor Area
- 47,940 square metres
- ix) Gross Leasable Floor Area (GLFA) for individual retail stores
- A. Retail Stores (Minimum) 1,860 square metres;
- B. Retail Stores (Maximum) 17,650 square metres; and,
- C. Notwithstanding Clause 1., a maximum a maximum GLFA of 11,200 square metres for retail stores between 460 and 1,860 square metres shall be permitted, in addition to not more than 20% of the 11,200 square metre maximum GFLA for retail stores having a minimum of 110 square metres.

(Page 136 of 247)

x)	Minimum Parking
	Requirements

- A. A minimum of 4.6 parking spaces for each 100 square metres of gross floor area of fraction thereof shall be provided and maintained.
- B. No parking space shall be less than 2.6 metres in width by 5.5 metres in length.
- xi) Minimum Aisle Width

The aisle giving access to a parallel parking space shall have a minimum width of 3.6 metres for one-way traffic, and a minimum width of 6.0 metres for two-way traffic; and,

xii) Barrier Free Parking Space Size Dimension A minimum barrier free parking space size dimension of 4.4 metres by 5.8 metres shall be provided.

- xiii) A minimum driveway width of 4.0 metres shall be provided and maintained for a drive-through and no drive-through lane, stacking lane or pick-up window, shall be located between the building and a street.
- xiv) Notwithstanding the definition of a Lot, those lands zoned Mixed Use Medium Density (C5, 338) Zone, Modified shall be considered as one lot, notwithstanding any consolidation or division of the same.
- xv) For buildings constructed after July 9, 2009, a maximum 3.0 metre front yard setback, which area shall be provided and maintained as a landscape area, shall apply to not less than 37.5% or more of the measurement of the front lot line.
- c) Notwithstanding Subsections 4.6 a), d), e), 5.6 c), 10.5.3 a), b), d) and h), the following regulations shall apply to the uses identified in Clause a) i), ii), iv) and v):

i)	Maximum Density	50 dwelling units per hectare
ii)	Minimum Landscaped Area	40 percent of the lot area, which may include the required privacy area
iii)	Minimum Lot Frontage	45.0 metres and 4.5 metres for an individual townhouse unit.

(Page 137 of 247)

- iv) Minimum Lot Area
- 0.3 hectares and 80 square metres for an individual townhouse.
- v) Minimum Front Yard
- 4.5 metres
- vi) Minimum Interior Side and Rear Yards
- 1.2 metres for end units
- vii) Minimum Rear Yard
- 7.0 metres
- viii) Minimum Separation Distance Between Buildings
- 1. 2.4 metres between end walls, except 10.0 metres between end walls separated by a private road;
- 2. 15.0 metres between front walls;
- 3. 12.0 metres between rear walls;
- 4. 12.5 metres between front and side walls;
- 5. 7.2 metres between rear and end walls, except 14.0 metres between rear and end walls separated by a private road; and,
- 3.0 metres between indoor and outdoor private recreational areas, facilities and structures and dwelling units.
- ix) Permitted Encroachments
- Unenclosed porched, both covered and uncovered, may project a maximum 2.5 metres into the required front yard and/or 6.0 metres into the required side vard.
- Stairs used to provide access to porches, both covered and uncovered, may project a maximum of 0.6 metres beyond the limits of the porch into the required front yard and/or side yard.

(Page 138 of 247)

- 3. Window projections with or without foundations, and architectural elements without a foundation such as, but not limited to, fireplaces, chimneys, pilasters, and corbels, may project a maximum of 0.61 metres beyond the front, end or rear walls.
- Balconies, canopies, awnings and fruit cellars may project a maximum of 2.0 metres into the required front or rear yard and/or 0.6 metres into the required side yard.
- 5. Decks may project 3.5 metres beyond the rear wall.
- x) Maximum Driveway Width

The maximum driveway width shall be the distance between the exterior walls of the garage.

- xi) Garage Projections
- The front face of a garage may project a maximum of 3.5 metres beyond the front face of the main building provided:
 - a. The main second floor wall above the garage is setback a maximum of 2.5 metres from the front face of the garage; and
 - b. The second floor wall face above the garage has a minimum width of sixty percent (60%) of the garage width.

- xii) Minimum Garage Setback
- 5.8 metres from the limits of a private road
- xiii) Maximum Height
- 12.6 metres
- xiv) Visual Barrier

A visual barrier shall be required along any lot line abutting a

(Page 139 of 247)

Residential Zone.

xv) Minimum Privacy Area A minimum of 30.0 square metres per townhouse dwelling unit shall be provided adjacent to the unit.

xvi) Minimum Amenity Area A minimum of 5 square metres per dwelling unit shall be provided and thereafter maintained, and may be provided in a common element condominium.

xvii) Dwelling Unit Placement

- 1. Not more than eight (8) dwelling units shall be attached in a continuous row; and,
- 2. Not more than four (4) attached dwelling units shall be erected in a row without offsetting or staggering the front face or wall of the dwelling a minimum of 1.0 metres or without varying the exterior design and materials of the front face or wall of the dwelling.

xviii) Minimum
Parking Requirements

- 1. Each parking space shall have a minimum width of 2.75 metres and a minimum length of 5.8 metres;
- Each dwelling unit shall have one
 (1) of the two (2) required parking spaces located within an attached private garage and the second parking space shall be provided contiguous to the unit; however, both parking spaces may be located underground or in a parking structure;
- A minimum of two (2) parking spaces per dwelling unit shall be provided plus 0.25 visitor parking spaces for each dwelling unit; and
- 4. No parking space or area, save and except a space or area contiguous to a dwelling unit, shall

(Page 140 of 247)

be located closer to a street line than 6.0 metres, and not be closer than 3.0 metres to any Residential Zone or where the adjoining land use is used for residential purposes, unless such parking is located within a below-grade communal parking structure.

- xix) For the purposes of the lot frontage, lot area, front yard, and side yard requirements only, a condominium road shall be deemed to be a public street.
- xx) Visitor parking may be provided in a common element condominium.
- d) Notwithstanding Subsections 5.6c), 10.5.3 a), b), c), d), g)ii) and iii), and h), the following regulations shall apply to Multiple Dwellings, Retirement Homes and the use identified in Clause a) iii):
 - i) Maximum Lot Area
- 5.25 hectares
- ii) Maximum Density for Multiple Dwellings
- 50 dwelling units per hectare
- iii) Minimum Parking Requirements
- A. Each parking space shall have a minimum width of 2.75 metres and a minimum length of 5.8 metres;
- B. A minimum of 1.5 spaces per dwelling shall be provided for a Multiple Dwelling and 0.4 spaces per unit for a Long Term Care Facility and Retirement Home; and,
- C. No parking space or area, shall be located closer to a street line than 6.0 metres and not be closer than 3.0 metres to any Residential Zone or where the adjoining land use is used for residential purposes, unless such parking is located within a below-grade communal parking structure.
- iv) Minimum Lot

(Page 141 of 247)

v) Minimum Lot Area 0.4 hectares

vi) Maximum Lot Coverage

25 percent

vii) Minimum Front Yard viii) Minimum Side and Rear

9 metres 9 metres

Yards

ix) Minimum Floor Area per Dwelling Unit

A. Bachelor Unit – 45 square metres

B. One Bedroom Unit – 60 square metres

C. Two Bedroom Unit – 75 square metres

D. Three or More Bedrooms – 85 square metres

x) Maximum Height

10.7 metres

xi) Minimum Amenity Area A minimum of 5 square metres per dwelling unit shall be provided and thereafter maintained.

xii) Minimum Landscaped Area 40 percent of the lot area excluding the amenity area.

- 339. Within the those lands zoned Arterial Commercial (C7) Zone, identified on Map 1048 of Schedule "A" Zoning Maps and described as 45 Goderich Road, the following special provisions shall apply:
 - a) In addition to Subsection 10.7.1, the following uses shall also be permitted:
 - i) Office
 - ii) Retail
- 340. Within the lands zoned Community Commercial (C3) Zone, identified on Map 958 of Schedule "A" Zoning Maps and described as 360 Beach Road, the following special provisions shall apply:

(Page 142 of 247)

- a) In addition to Subsection 10.3.1, all permitted uses shall be contained within the building existing as of April 11, 2012.
- b) In addition to Subsection 10.3.1, the following uses shall also be permitted:
 - i) Kennel, with no outside cages or runs
 - ii) Funeral Home
- c) In addition to Subsection 10.3.2, the following uses shall also be prohibited:
 - i) Motor Vehicle Gas Bar
 - ii) Motor Vehicle Service Station
 - iii) Motor Vehicle Washing Establishment
 - iv) Commercial Parking Facility
- d) Notwithstanding Subsections 5.2b), 5.2f), and 5.6c), the following regulations shall also apply:
 - i) Parking Space A minimum parking space size Size Dimension dimension of 2.6 metres by 5.5 metres shall be provided.
 - ii) Barrier Free Parking A minimum barrier free parking Space Size Dimension space size dimension of 4.4 metres by 5.5 metres shall be provided.
 - Iii) Parking Space 1 space per 33 square metres of Requirement Gross Leasable Floor Area for any permitted commercial use.
- 341. Within the lands zoned Arterial Commercial (C7) Zone, identified on Maps 1433 and 1434 of Schedule "A" Zoning Maps and described as 120 and 128 Portia Drive, the following special provisions shall apply:
 - a) Notwithstanding Subsection 10.7.1, the following uses shall be permitted up to a maximum aggregate gross floor area of 11,788 square metres:
 - i) Veterinary Service
 - ii) Building and Lumber Supply Establishment
 - ii) Convenience Retail in conjunction with a Motor Vehicle Gas Bar
 - iv) Catering Service
 - v) Conference or Convention Centre

(Page 143 of 247)

- vi) Craftsperson Shop
- vii) Home Furnishing Retail Establishment
- viii) Home Improvement Supply Establishment
- ix) Hotel
- x) Motor Vehicle Gas Bar
- xi) Motor Vehicle Dealership
- xii) Commercial Parking Facility
- xiii) Commercial Recreation
- iv) Major Recreational Equipment Sales, Rental and Service Establishment
- v) Rental Establishment
- vi) Restaurant
- b) Notwithstanding Subsection 10.7.1, the following uses shall be permitted up to a maximum aggregate gross floor area of 10,525 square metres, provided the permitted uses contained in Clause a) and this section shall not exceed an aggregate gross floor area of 11,788 square metres:
 - i) Financial Institution
 - ii) Office
 - iii) Brewers Retail Store
 - iv) Personal Service
 - v) Travel Agency
 - vi) Farmer's Market
 - vii) Gymnasium
 - viii) Insurance Office
 - ix) Library, Museum, and Art Gallery
 - x) Liquor Control Board of Ontario Stores
 - xi) Drug Store
 - xii) Retail Store
 - xiii) Convenience Retail Store
- c) In addition to Subsection 10.7.2, the following uses shall also be prohibited:
 - i) Movie Theatre(s)
 - ii) Department Store
 - iii) Warehouse Membership Club
 - iv) Residential Uses
- d) Notwithstanding Subsections 5.1a) v), 5.6 c), 10.7.3 a), b) and c), the following regulations shall also apply:
 - i) Minimum Front 1.5 metres, except 3.0 metres when yard providing for a planting strip under subsection v).

(Page 144 of 247)

ii) Minimum Side Yard 1.5 metres, except where an interior side yard abuts a private vehicular turnaround, a 0.0 metre side yard shall be permitted.

iii) Minimum Rear Yard 10 metres.

iv) Minimum Parking Requirement for all uses 3.5 spaces for each 93 square metres of gross floor area.

v) Planting Strip Requirements 3.0 metres strip shall be provided adjacent to each lot line which abuts a public street or lot containing a dwelling comprising one or two dwelling units, and shall permit the location of principal buildings, walkways and sidewalks, retaining walls, curbs, signs, and light standards within the required landscaping strip.

- 343. Within the lands zoned Community Commercial (C3) Zone, identified on Maps 1339 and 1340 of Schedule "A" Zoning Maps and described as 1160 Upper Paradise Road, the following special provisions shall apply:
 - a) Notwithstanding Subsection 10.3.3 j), a planting strip of not less than 6.0 metres in width shall be provided and maintained along every side lot line and rear lot line adjoining a Residential Zone or use.
- 344. Within the land zoned District Commercial (C6) Zone, identified on Map 1748 of Schedule "A" Zoning Maps and described as 3250 Homestead Drive, the following special provisions shall apply:
 - a) In addition to Subsection 10.6.2, the following use shall also be prohibited:
 - i) Financial Establishment
 - b) In addition to Subsection 10.6.1, the following use shall also be permitted:
 - A maximum of 12 residential units shall be permitted within the principal building, provided they are located above the permitted ground floor commercial.
 - c) In addition to Subsection 5.2.1 and notwithstanding Subsections 5.1a) v), 5.2b), 5.2f), 10.6.3 a), c), g), h), i) and j), the following regulations shall also apply:

(Page 145 of 247)

i) Maximum Lot Coverage 37%

ii) Minimum Front Yard 6.7 metres

iii) Minimum Side Yard

0.0 metres on a corner lot for the side yard abutting the flankage street.

iv) Parking

No parking space or part thereof shall be located and no land shall be used for the temporary parking or storage of any motor vehicle at a distance of less than 2.6 metres from any rear lot line, or 1.0 metres from any street line, or 2.0 metres from the boundary of any Residential or Institutional Zone or any Zone where the adjoining lands are used for residential or institutional purposes.

v) Parking Space Size Dimension

A minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided.

vi) Barrier Free Parking Space Size Dimension

A minimum barrier free parking space size dimension of 4.4 metres by 5.5 metres shall be provided.

vii) Minimum Loading Requirements

A minimum of one loading space shall be provided and maintained for the entire development with a minimum dimension of 2.6 metres wide x 5.5 metres long.

viii) Minimum Landscaping Requirements

 A landscaped area, in the form of a planting strip having a minimum width of 1.8 metres and a fence having a minimum height of 1.8 metres, shall be provided and maintained adjacent to any lot line that abuts any Residential or

(Page 146 of 247)

Institutional Zone or any Zone where the adjoining land is used for residential or institutional purposes;

- Notwithstanding Clause 1., the required minimum 1.8 metre planting strip shall be comprised of Eastern White Cedars (Thuja Occidentalis) with a minimum size of 200 or 250 cm W.B., and a board on board fence with a minimum height of 1.8 metres, along the rear lot line abutting 3 Longview Drive:
- 3. A landscaped area having a minimum width of 3.0 metres shall provided be maintained along every portion of any lot line that abuts Homestead Drive, and 0.0 metres shall be provided along any portion abutting building along Longview Drive, and a minimum of 1.0 metres for all other portions abutting Longview Drive.
- ix) Any garbage enclosure shall only be provided and maintained within the interior of the building.
- x) A minimum of 50% of the ground floor façade along Longview Drive shall be composed of windows and doors.
- xi) Residential and visitor's parking areas shall be physically and functionally separated from the commercial parking area.
- xii) No balconies shall be permitted on the west façade of the proposed development.
- 345. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 903 of Schedule "A" Zoning Maps and described as 15 and 17 Ogilvie Street, the following special provision shall apply:

(Page 147 of 247)

- a) In addition to Subsection 10.5.1, a Semi-Detached Dwelling shall also be permitted.
- 346. Within the lands zoned District Commercial (C6) Zone, identified on Maps 1399 and 1450 of Schedule "A" Zoning Maps and described as 1381 and 1395 Upper Ottawa Street, the following special provisions shall apply:
 - a) Notwithstanding Subsection 10.6.3 c), a minimum westerly side yard of 3.1 metres shall be provided and maintained;
 - b) Notwithstanding Subsection 10.6.3 b), a minimum rear yard of 3.1 metres shall be provided and maintained; and,
 - c) Notwithstanding Subsection 5.2b), every parking space, other than a parallel parking space, shall have dimensions not less than 2.7 metres wide and 5.5 metres long.
- 347. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 1956 of Schedule "A" Zoning Maps and described as 3200 Regional Road 56, the following special provisions shall apply:
 - a) Notwithstanding Subsections 10.5a.1, only the following uses shall be permitted:
 - i) Commercial School
 - ii) Day Nursery
 - iii) Financial Establishment
 - iv) Office
 - v) Personal Services
 - vi) Restaurant
 - vii) Retail
 - viii) Residential units on the ground floor have 50% of the floor area combined with permitted commercial uses having 50% of the floor area
 - b) In addition to Clause a), residential units shall be required above any commercial use permitted on the ground floor.
 - c) In addition to Clause a), the Commercial School shall only be permitted in the cellar of the existing building.
 - d) In addition to Subsection 5.2.1 and notwithstanding Subsections 4.19, 5.1 a)v), 5.2b), 5.2f), 5.6 c), 10.5a.3) c), i) and k), the following regulations shall apply:
 - i) Minimum Front Yard 3.0 metres;

(Page 148 of 247)

- ii) Minimum Side Yard
- 3.0 metres, except 7.5 metres abutting a side lot line which is the boundary of any Residential Zone, or where a ground floor residential use is located on the adjoining lands.
- iii) Minimum Parking Requirements
- A. Parking spaces shall be provided at a rate of 1.25 spaces per residential dwelling unit, and 1 space per every 60 square metres of gross floor area for commercial uses;
- B. Visitor parking shall be shared with the commercial parking space.
- iv) Minimum Loading Requirements
- One (1) loading space shall be required and shared for the residential and commercial uses.
- v) Minimum Landscaping Requirements
- A. A landscaped area in the form of a planting strip having a minimum width of 6.0 metres and a fence having a minimum height of 1.8 metres shall be provided and thereafter maintained adjacent to every part of any lot line that abuts a Residential use;
- B. A landscaped area having a minimum width of 3.0 metres shall be provided and thereafter maintained adjacent to every portion of any lot line that abuts a street, and such landscaped area shall be continuous except for required driveway(s).
- vi) Parking Space Size Dimension

A minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided.

(Page 149 of 247)

vii) Barrier Free Space Size Dimension

A minimum barrier free space size of 4.4 metres by 5.5 metres shall be provided.

viii) Outside Storage and Display

- A. Outside storage and display areas shall not be permitted less than 6.0 metres from any street and/or the boundary of any Residential Zone or any Zone where the adjoining land is used for residential:
- B. Outside storage areas shall be screened from view and enclosed with a fence having a minimum height of 1.8 metres.
- 348. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 994 of Schedule "A" Zoning Maps and described as 151 John Street South, the following special provisions shall apply:
 - a) In addition to Subsection 10.5.1, a Multiple Dwelling within the existing building containing no more than 16 dwelling units shall also be permitted; and,
 - b) Notwithstanding Subsection 5.6, zero (0) parking spaces shall be required.
- 349. Within the lands zoned District Commercial (C6) Zone, identified on Maps 1501 and 1502 of Schedule "A" Zoning Maps and described as 512 Highland Road West, the following special provisions shall apply:
 - a) In addition to Subsection 10.6.1, the following use shall also be permitted:
 - i) Retail, including one Supermarket
 - b) Notwithstanding the definition of Retail in Section 3: Definitions and Subsections 4.6, 4.25c)ii), 5.1a)v), 5.2b), 5.2f), 5.6 c) and, 10.6.3 a), b), c), e), f), g) iii), g) iii), g) iv), g) v) and i), the following regulations shall apply:
 - i) Total Minimum Gross 2,000.0 square metres Leasable Floor Area
 - ii) Total Maximum Gross 19,500.0 square metres

(Page 150 of 247)

Leasable Floor Area

- iii) Maximum Gross Leasable Floor Area for one Supermarket
- 5,100.0 square metres
- iv) Maximum Gross
 Leasable Floor Area for
 one Retail Department
 Store shall not be
 permitted prior to the
 year 2018
- 6,000.0 square metres

- v) Minimum Yard Abutting the Westerly Lot Line along the Trinity Church Road Extension
- 11.0 metres
- vi) Minimum Yard Abutting the Northerly Lot Line along Stone Church Road East
- 6.0 metres
- vii) Minimum Yard Abutting the Easterly Lot Line along Upper Mount Albion Road
- 6.0 metres
- viii) Minimum Yard Abutting the Southerly Lot Line along Highland Road West
- 6.0 metres
- ix) Minimum Landscaped Area
- A. A landscaped strip, having a minimum width of 3.0 metres, shall be provided and maintained adjacent to any public street, except for points of ingress and egress.
- B. A landscaped strip, having a minimum width of 6.0 metres, shall be provided and maintained along the westerly lot line (future Trinity Church Road Extension).
- C. An outdoor patio may be permitted to encroach into the

(Page 151 of 247)

required front yard and landscape strip.

- x) Minimum Commercial Parking Requirements
- 4 spaces per 93 square metres of gross floor area
- xi) Minimum Parking Space Size

No parking space shall be less than 2.6 metres in width by 5.5 metres in length.

xii) Barrier Free Space Size Dimension

A minimum barrier free space size of 4.4 metres by 5.5 metres shall be provided.

xiii) Built form for New Development

The minimum combined width of the ground floor façade of all buildings located within 20 metres of the Upper Mount Albion Road lot line shall be equal to 40% or more of the measurement of the front lot line, and shall be subject to the following:

- A. A maximum building setback of 6.0 metres shall apply;
- B. All principal entrances shall be accessible from the building façade with direct access from the public sidewalk; and,
- C. No parking, driveways, drive through lanes, stacking lanes, or aisles shall be located between the building façade and the public street.
- 550. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 1250 and 1251 of Schedule "A" Zoning Maps and described as 259, 261 Highway No. 8, the following special provisions shall apply:
 - a) Notwithstanding Subsections 10.5.1, only the following uses shall be permitted:
 - i) Animal hospital, only if wholly enclosed within a building
 - ii) Denture clinic
 - iii) Restaurant
 - iv) Financial Institution

(Page 152 of 247)

- v) Office
- vi) Optometrist
- vii) Personal Services
- viii) Retail
- b) Notwithstanding Subsection 5.6 c), the following parking ratio shall apply to the uses identified in Clause a):
 - i) 1 space per 31.0 square metres of Gross Floor Area.
- 551. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 1251 of Schedule "A" Zoning Maps and described as 303 Highway No. 8, the following special provisions shall apply:
 - a) Notwithstanding Subsections 10.5.3 a) ii) and b) and in addition to Section 3: Definitions and Subsection 10.5.3 i), the following regulations shall also apply:
 - i) Maximum Front Yard
- 3.0 metres, except that a minimum front yard of 7.5 metres shall be provided and maintained for the building or a portion of the building existing as of April 24, 2013.
- ii) Minimum Rear Yard
- 5.0 metres.
- iii) Minimum Landscaped Open Space
- 10 percent of the lot area, a portion of which shall include the following, where applicable:
- A. A Planting Strip having a minimum width of 4.5 metres shall be provided and maintained adjacent to every portion of any lot line that abuts a street, except for points of ingress and egress:
- B. A Planting Strip having a minimum width of 4.5 metres shall be provided and maintained adjacent to every portion of any lot line that abuts any Zone other than a Commercial and Mixed Use or Industrial Zone, except that a Planting Strip having a minimum width of 3.0 metres is permitted along the easterly side

(Page 153 of 247)

lot line;

- C. No Planting Strip shall be required adjacent to a portion of any lot line that abuts a Commercial and Mixed Use or Industrial Zone; and,
- D. A retaining wall is permitted in a Planting Strip.
- 552. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 1185 and 1239 of Schedule "A" Zoning Maps and described as 800 Upper Wentworth Street and 362 Mohawk Road East, the following special provisions shall apply:
 - a) Notwithstanding Subsection 10.5.1, for the lands located at 800 Upper Wentworth Street, only the following use shall be permitted within the building existing as of June 15, 2011:
 - i) Personal Services
 - b) In addition Subsection 10.5.1 and notwithstanding Subsection 4.21a), for the lands located at 362 Mohawk Street East, the following shall also apply:
 - i) A Single Detached Dwelling within the building existing as of June 15, 2011 shall also be permitted; and,
 - ii) A home occupation shall not be permitted within the use identified in Clause b) i).
- 553. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 1183 of Schedule "A" Zoning Maps and described as 830, 836 and 840 Upper James Street, the following special provisions shall apply:
 - a) In addition to Subsection 10.5.2, a Drive-Through Facility shall be prohibited.
 - b) Notwithstanding Subsection 5.2b) and 5.2f), the following special Parking provision shall also apply:
 - i) Parking Space Size A minimum parking space size Dimension dimension of 2.6 metres by 5.5 metres shall be provided.

(Page 154 of 247)

ii) Barrier Free Parking Space Size Dimension

A minimum barrier free parking space size dimension of 4.4 metres by 5.5 metres shall be provided.

- 554. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 860 of Schedule "A" Zoning Maps and described as 104 King Street West, the following special provisions shall apply:
 - a) In addition to Subsection 10.5a.1, all permitted uses shall be contained within the building existing as of May 26, 2010.
 - b) Notwithstanding the definition of Front Lot Line in Section 3: Definitions, Subsections 5.1 a) v), 5.2 c) and 5.2.1, and 10.5a.3g), the following regulations shall apply:

i)	Minimum Parking and	A minimum of five (5) parking spaces		
	Loading Requirements	and one (1) loading space shall be		
		provided and maintained on the		
		subject lands.		

- ii) Location of Parking Shall be provided and maintained and Loading Spaces only in the easterly side yard and shall be permitted to be 0.0 metres from a public thoroughfare.
- iii) Parking Space Size A minimum parking space size Dimension dimension of 2.6 metres by 5.5 metres shall be provided.
- iv) Barrier Free Parking A minimum barrier free parking space Space Size Dimension size dimension of 4.4 metres by 5.5 metres shall be provided.
- v) Manouevering space for off-street parking and loading spaces may be provided off-site.
- vi) Front Lot Line The front lot line shall be the property line which abuts King Street West.
- vii) Building Envelope The external appearance of the east, west, north, and south building facades, including building materials, stone sills and lintels, brickwork, existing door and window openings, and the height and form of all roofs,

(Page 155 of 247)

dormers, and roofing materials shall be retained in their appearance and condition as existing on May 26, 2010.

viii) Windows and Doors

Notwithstanding Clause v), the installation of new windows and doors into existing and unaltered window and door openings shall be permitted if required by the Ontario Building Code.

ix) Mechanical Equipment

Notwithstanding Clause v), the installation of required mechanical equipment in the flat roof area of the rear of the existing heritage structure shall be permitted if required by the Ontario Building Code.

x) Ontario Heritage Act

Notwithstanding Clause v), vi) and vii), should the lands be designated under the Ontario Heritage Act, any alternative building design or building materials approved through the issuance of a Heritage Permit shall be deemed to comply with Clause v), vi) and vii).

- 555. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Maps 861 and 903 of Schedule "A" Zoning Maps and described as 16 and 22 King Street East, the following special provisions shall apply:
 - a) Notwithstanding Subsections 10.5a.3 a), b), c) and d) the following regulations shall apply:
 - i) Front Yard
- A. 0.0 metres;
- B. 3.9 metres for the front principal wall of the building 16.5 metres and above in height; and,
- C. 6.5 metres for the front principal wall of the building 19.0 metres and above in height.
- ii) Minimum Side Yard 0.15 metres.

(Page 156 of 247)

iii)	Minimum Rear Yard	1.0 metres.	
iv)	Maximum Height	25.0 metres	
v)	Maximum Lot Coverage	97 percent	
vi)	Landscaped Area	3.0 percent	
vii)	Total Gross Floor Area	The total gross floor area of all buildings on a site shall not exceed 7,623 square metres, provided that a minimum of 6.0 percent of the gross floor area shall be used for commercial purposes.	
viii)	Ground Floor Façade Glazing	A Minimum 50% of the area of the ground floor façade along the King Street West lot line shall be composed of windows and doors.	
In addition to Subsection 5.1a) v) a) and notwithstanding Subsections 5.2b), 5.2f), 5.6 c), the following parking regulations shall apply:			
i)	Minimum Parking Requirements	 A. 0.3 parking space per dwelling unit 60 square metres or less; and, 	
		B. 1.0 parking space per dwelling unit more than 60 square metres.	
ii)	Parking Location	No parking space or part thereof shall be located, and no land shall be used for the temporary parking or storage of any vehicle at a distance of not less than:	
		A. 0.0 metres from the front lot line;	
		B. 0.16 metres from the westerly side lot line;	

C. 1.08 metres from the rear lot line;D. 0.19 metres from the easterly lot

line; and,

b)

(Page 157 of 247)

E.	3.0	metres	from	any	public
	thor	oughfare	for	only	parking
	located at-grade.				

iii) Parking Space Size Dimension A minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided.

iv) Barrier Free Parking Space Size Dimension

A minimum barrier free parking space size dimension of 4.4 metres by 5.5 metres shall be provided.

- 556. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 1040 of Schedule "A" Zoning Maps and described as 489 and 489½ Concession Street, the following special provisions shall apply:
 - a) In addition to Subsection 10.5a.1, the following use shall also be permitted:
 - i) Two dwelling units within the northerly building, and two dwelling units and a commercial unit shall be permitted within the southerly building existing on February 13, 2013.
 - b) Notwithstanding Subsections 5.2 b), 5.6 d), 5.6 c), 10.5a.3 b) and c), the following regulations shall also apply:
 - i) Minimum Parking No less than 3 on-site parking spaces shall be provided and maintained for 2 duplex buildings (4 dwelling units total).
 - ii) Manoeuvring Space A minimum 5.1 metre manoeuvring space shall be provided and maintained for a 90 degree parking space.
 - iii) Parking Space A parking space shall have dimensions not less than 2.7 metres wide and 5.5 metres long.
 - iv) Minimum Side Yard A minimum easterly side yard setback of 0.0 metres and a minimum westerly side yard setback of 0.4 metres shall be permitted for the building existing on February 13, 2013.

(Page 158 of 247)

- v) Minimum Rear Yard A minimum rear yard setback of 0.0 metres shall be permitted for the building existing on February 13, 2013.
- 557. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 951 of Schedule "A" Zoning Maps and described as 99 and 103 Locke Street South, the following special provisions shall apply:
 - Notwithstanding Subsections 5.2.1, 5.2b), 5.2f), 5.6 c), 10.5a.3 a), b),
 d), h) iii), h) viii) and i), the following regulations shall apply to a mixed-use building with ground floor commercial uses and 84 dwelling units located above:
 - i) Maximum Building Height

6 storeys and 22.5 metres;

- ii) A mechanical penthouse, which is located above the main roof, shall be allowed an additional maximum height of 4.0 metres and 300 square metres in area and may contain associated enclosed amenity/multi-purpose area.
- iii) Minimum Yards
- A. A minimum of 0.0 metres shall be provided and maintained for the side yard abutting Jackson Street West;
- B. A minimum of 1.6 metres shall be provided and maintained for the side yard abutting Canada Street;
- C. A minimum of 0.0 metres shall be provided and maintained for the front yard abutting Locke Street South;
- D. A minimum of 0.0 metres shall be provided and maintained for the rear yard (including northerly 0.77 metres and easterly 31 metre lot lines) for the first two storeys and a minimum of 7.15 (excluding balconies) shall be provided to the 0.77 metres rear lot line for all remaining storeys above the first two (2) storeys.
- iii) The gross floor area of the primary building shall be 8,500 square metres with a floor area ratio of 4.25.

(Page 159 of 247)

- iv) No landscaped/planting area shall be provided and maintained along any side lot line and rear lot line adjoining a Residential Zone or use.
- v) Minimum Parking Ninety (90) underground parking spaces shall be provided.
- vi) Parking Space A minimum parking space size Size Dimension dimension of 2.7 metres by 5.5 metres shall be provided.
- vii) Barrier Free Parking A minimum barrier free parking space Space Size size dimension of 4.4 metres by 5.5 Dimension metres shall be provided.
- viii) Loading A. A minimum loading space Space dimension of: 3.7 metres in width by Requirements 9.0 metres in length shall be provided and maintained; and,
 - B. The manoeuvring space for the loading space shall be provided offsite and access driveways shall be located 0.0 metres from a Residential Zone.
- ix) A minimum of 60% of the ground floor façade fronting Locke Street South shall be comprised of windows and doors.
- x) A minimum block face of 75% (excluding portions of the building to be used for access) shall be provided for every lot line fronting a public street.
- 558. Within the lands zoned District Commercial (C6) Zone, identified on Map 1413 of Schedule "A" Zoning Maps, and described as:

Property Address	Map Number
95 Portia Drive	Map 1434
103, 109 Portia Drive	Map 1434

The following special provisions apply:

a) i) In addition to the definition of Retail in Section 3: Definitions, the following definition shall also apply:

Supermarket A store in which various kinds of food

(Page 160 of 247)

and non-food items are offered or kept for sale, including fresh meats and fresh produce, provided that the area devoted to food items is predominant, and the non-food items may include but are not limited to flowers, hardware, patent medicines, toiletries, household supplies, garden supplies, wine, photofinishing, magazines and videos.

- ii) In addition to the definition of Lot in Section 3: Definitions, the lands described as 95, 103, 109 Portia Drive shall be considered one lot for zoning purposes.
- b) Notwithstanding Subsection 10.6.1, only the following uses shall be permitted:
 - i) Art Gallery
 - ii) Auctioneer Establishment
 - iii) Building and Lumber Supply Establishment, within a wholly enclosed building
 - iv) Catering Service
 - v) Cold Storage Locker Establishment
 - vi) Commercial Entertainment, within a wholly enclosed building
 - vii) Commercial Parking Facility
 - viii) Commercial Recreation, within a wholly enclosed building
 - ix) Community Garden
 - x) Craftsperson Shop
 - xi) Day Nursery
 - xii) Educational Establishment
 - xiii) Financial Establishment
 - xiv) Funeral Home
 - xv) Laboratory
 - xvi) Library
 - xvii) Major Recreation Vehicle Sales and Service Establishment
 - xxiii) Manufacturing, limited to a Printing and / or Publishing Establishment
 - xix) Medical Clinic
 - xx) Museum
 - xxi) Office
 - xxii) Personal Services
 - xxiii) Post Office
 - xxiv) Private Club or Lodge
 - xxv) Repair Service
 - xxvi) Restaurant
 - xxvii) Retail, not including a Supermarket
 - xxviii) Transportation Depot

(Page 161 of 247)

Urban Farm xxix)

Urban Farmer's Market XXX)

- Notwithstanding Subsection 10.6.1.1 i) 1. B., a two-storey building c) containing office uses on both the first and second floor is also permitted.
- d) In addition to Subsection 10.6.2, the following uses shall also be prohibited, even as an accessory use:
 - i) Body Rub Parlour
 - ii) Department Store
 - **Dwelling Unit** iii)
 - Open Storage iv)
 - Supermarket V)
- Notwithstanding Subsections 5.6 c), 10.6.3 a), b), c), f) and g), and in e) addition to Subsection 10.6.3 h), the following regulations apply:
 - i) Minimum Front Yard 1.5 metres, except as provided in Clause vii)
 - Minimum Side Yard 1.5 metres, except where an interior ii) side yard abuts a private vehicular

turnaround, a 0.0 metre side yard

shall be permitted.

iii) Minimum Rear Yard 10.0 metres

iv) Minimum Frontage 30.0 metres

Maximum Total V) 3,300 square metres

> Aggregate Gross Floor Area for all

Commercial Uses

vi) Built Form for New Development

Within 20 metres of the Wilson Street West Lot Line, the minimum façade shall be greater than or equal to 40% of the measurement of Wilson the Street Lot Line, excluding access driveways to Wilson Street West and enhanced bioswale areas, and shall be subject to the following:

1. A maximum building setback of

(Page 162 of 247)

6.0 metres is permitted

- A minimum of 40% of the area of the ground floor façade facing Wilson Street West shall be composed of windows and doors
- No parking, driveways, drive through lanes, stacking lanes, or aisles shall be located between the building façade facing Wilson Street West and Wilson Street West
- vii) Minimum Planting Strip
- 3.0 metres adjacent to each lot line which abuts a public street or lot containing a dwelling comprising one or two dwelling units (but shall permit the location of principal buildings, walkways / sidewalks, retaining walls, curbs, signs, and light standards within required Planting Strips).
- viii) Minimum Parking Requirement:

Parking for all uses shall be provided at a rate of 3.5 spaces for each 93 square metres of Gross Floor Area, or part thereof.

- 559. Within the lands zoned Arterial Commercial (C7) Zone, identified on Map 1290 of Schedule "A" Zoning Maps and described as 1187 and 1201 Upper James Street, the following special provisions shall apply:
 - a) Notwithstanding Subsections 5.2b), 5.2f), 10.7.3 a), b) and c) and in addition to Subsection 4.20 a), the following regulations shall also apply:
 - i) Minimum Front Yard 0.0 metres;
 - ii) Minimum Side Yard 1.5 metres;
 - iii) Minimum Rear Yard 15.0 metres.
 - iv) Outdoor Commercial Patio
- Shall be permitted in the rear yard;
- 2. Shall not exceed an area of

(Page 163 of 247)

30.0 square metres; and,

- 3. Shall be setback a minimum of 12.0 metres from the rear lot line.
- v) Parking Space Size Dimension

A minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided.

vi) Barrier Free Parking Space Size Dimension

A minimum barrier free parking space size dimension of 4.4 metres by 5.5 metres shall be provided.

- 560. Within the lands zoned Arterial Commercial (C7) Zone, identified on Map 1445 of Schedule "A" Zoning Maps and described as 1749 and 1755 Upper James Street, the following special provision shall apply:
 - a) Notwithstanding Subsections 10.7.3 f) and 10.7.4 c), a minimum 3 metre wide planting strip shall be provided and maintained along the entire southerly lot line.
- 561. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 993 of Schedule "A" Zoning Maps and described as part of 252 and 254 Locke Street South, the following special provision shall apply:
 - a) Notwithstanding Subsection 4.20 b) and c), an outdoor commercial patio with a maximum seating accommodation of 36 persons adjoining a Residential Zone shall be permitted to be located in the rear yard and an outdoor commercial patio with a maximum seating accommodation of 6 persons shall be permitted to be located in the north-east side yard.
- Within the lands zoned District Commercial (C6) Zone, identified on Maps 1258 and 1259 of Schedule "A" Zoning Maps and described as 1290 South Service Road, 5 and 23 Vince Mazza Way, Plan 310 Lots 78 and 79, Part Lots 77, 80 to 94, part of Elizabeth Street and part of unnamed street., and Registered Plan 62R-14865, Parts 2 to 4, the following special provisions shall apply:

Appealed by Appellant No. 5 (2294643 Ontario Inc.).

(a) Notwithstanding the definitions of Lot Line – Front and Commercial Recreation in Section 3: Definitions, and in addition to Section 3: Definitions, for the purpose of Special Exception No. 562, the following definitions shall apply:

Lot Line – Front The southerly portion of the lot line along Vince

(Page 164 of 247)

Mazza Way having a dimension of 125.840 metres shall be deemed to be the front lot line.

Commercial Recreation

When used to describe a use, building, structure or activity, means a use, building or part there, structure or activity pertaining to operations for gain for the purposes of squash, tennis, racquet or handball courts, bowling alleys, gymnasiums, private clubs, banquet halls, physical fitness centre, arenas, yoga studios, martial arts clubs, or similar facilities where instruction is received, but does not include a flea market.

Auditorium

Means a building or structure, or part thereof, where facilities are provided for civic, educational, musical, recreational, theatrical, political, religious or social events, and includes an assembly hall, arena, cinema, theatre, playhouse, opera house, concert hall, public museum, exhibition hall, convention centre or community social centre, but does not include an amusement centre, commercial recreation centre, stadium or drive-in theatre as defined herein, or any retail store or restaurant unless such retail store, restaurant and amusement centre is an accessory use.

Floor Area – Gross Leasable

For a commercial or industrial use means the total floor area of all the storeys of all buildings or structures used for commercial or industrial purposes on a lot; such areas to be measured from the interior faces of the exterior walls, or from centre lines of party walls but excluding the area of any floor area used for the following purposes:

- (a) Parking of motor vehicles;
- (b) Storage rooms in basements or cellars;
- (c) Mechanical equipment rooms for serving and maintaining the building;
- (d) Elevator shafts and areas occupied by escalators; and,
- (e) Common walkways, hallways, enclosed malls and services areas.

(Page 165 of 247)

- b) Notwithstanding Subsection 10.6.1 and in addition to Subsection 10.6.2, the following uses shall be prohibited:
 - i) Amusement Arcade, unless it is accessory to an Auditorium
 - ii) Art Galleries
 - iii) Commercial Entertainment
 - iv) Commercial Recreation
 - (v) Garden Centre, unless it is accessory to a retail and/or department store, subject to the regulations of d) xi) below
- c) In addition to Subsection 10.6.1, the following use shall also be permitted:
 - i) Animal Shelter
- d) (In addition to Subsection 5.2.1 and notwithstanding Subsections 5.1a) v) i), 5.2 b), 5.2 f), 5.6 c), 10.6.3 a), b), c), e), f), g) iii), j) and j), the following regulations shall also apply:
 - i) Minimum Lot Area 3.4 hectares.
 - ii) Minimum Lot Frontage 125 metres.
 - (iii) Minimum Gross 7,500 square metres for the entire site.
 - iv) Minimum Front Yard 5.0 metres.
 - v) Minimum Rear Yard 14.0 metres.
 - vi) Minimum Landscaped Open Space

10 percent of lot area, a portion which shall include a landscape strip having a minimum width of 4.4 metres shall be provided adjacent to any public street, including at the hypotenuse of a daylight triangle, except for the lot line abutting the South Service Road, where a landscape strip having a minimum width of 7.4 metres shall be provided, excluding the points of ingress and egress.

- vii) Minimum Commercial Parking Requirements
- A. Parking for a shopping centre shall be at a ratio of 1 parking space for each 21 square

(Page 166 of 247)

metres of gross floor area or part thereof; and,

- B. Required parking shall not be located between a building façade and the respective street. In no case shall the required parking be closer than 4.6 metres from a street.
- viii) Minimum Loading Requirements

The following loading regulations shall apply for commercial buildings:

- A. 1,200 square metres 1,999 square metres: Minimum of 1 loading space;
- B. 2,000 square metres 7,999 square metres: Minimum of 2 loading spaces; and,
- C. 8,000 square metres and greater: Minimum of 4 loading spaces.
- (ix) Minimum Side Yard 4.4 metres.
- Medical Offices or Clinics and/or Professional or Business Offices on the same lot shall not exceed 2,000 square metres of Gross Floor Area.
- Accessory Garden Centres

Shall be subject to the following:

- A. The Accessory Garden Centre shall not exceed a maximum period of 120 days annually; and,
- B. Not more than 10% of the total number of parking spaces provided on the lands shall be used for an Accessory Garden Centre.
- xii) Built Form

The minimum width of all ground floor facades facing the following roadways, shall be equal to or

(Page 167 of 247)

exceed the following percentages for the entire site, except at the daylight triangles:

- A. Winona Road 65%;
- B. Vince Mazza Way (South Lot Line) 50%;
- C. Vince Mazza Way (Front Lot Line) 40%; and,
- D. South Service Road 35%.
- xiii) Parking Space Size Dimension

A minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided.

xiv) Barrier Free Parking
Space Size Dimension

A minimum barrier free parking space size dimension of 4.4 metres by 5.5 metres shall be provided.

- 563. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone and Parking (U3) Zone, identified on Map 951 of Schedule "A" Zoning Maps and described as 154, 158, 162, 162½, and 164 Locke Street South, the following special provisions shall apply:
 - a) Notwithstanding Subsection 5.1a) v) 5.2b), 5.2f), and 5.2i) and in addition to Subsection 5.2c) the following special regulations shall also apply for the portion of lands zoned Mixed Use Pedestrian Focus (C5a) Zone and Parking (U3) Zone:
 - i) Parking Space Size Dimension
- A. A minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided; and,
- B. Notwithstanding Clause A., every parking space within an attached garage shall have dimensions not less than 2.7 metres by 6.0 metres long;
- ii) Barrier Free Parking A minimum barrier free parking Space Size Dimension space size dimension of 4.4 metres

(Page 168 of 247)

by 5.5 metres shall be provided.

- iii) Minimum Driveway
 Aisle Width
- A. A Driveway Aisle shall have a minimum width of 5.0 metres; and,
- B. A Driveway Aisle shall have a minimum of 4.0 metres for one-way traffic.
- iv) Location of Driveway
 Aisle and Parking
 Space

Required parking space and driveway aisle for uses permitted under the Mixed Use Pedestrian Focus (C5a) Zone shall be permitted to be provided on the portion of lands zoned Parking (U3) Zone;

v) Ingress and Egress of Parking Lot

Points of ingress and egress from a parking lot shall be a minimum of 0.0 metres from a residential district.

vi) Setback of Surface Parking Lot A surface parking lot shall not be less than 1.0 metre from the westerly lot line, and 0.0 metre from the northerly and southerly lot line.

- b) Notwithstanding Subsection 12.3.2 g), the following special regulations shall also apply for the portion of lands zoned Parking (U3) Zone:
 - i) A Landscaped Area, where not less than 50% shall consist of a Planting Strip, with a minimum of 1.0 metre, shall be provided and maintained along the western lot line.
- c) The following special regulations shall also apply for the portion of lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone:
 - i) Notwithstanding Subsection 10.5a.1.1i)3.A., a surface Commercial Parking Facility shall also be permitted.
- 564. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 414 of Schedule "A" Zoning Maps and described as the south easterly portion of 490 Dundas Street East, the following special provisions shall apply:

(Page 169 of 247)

- a) In addition to Subsection 10.5.1, the following uses shall also be permitted:
 - i) Street Townhouse Dwelling
- 565. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 1280 of Schedule "A" Zoning Maps and described as 128 and 134 Wilson Street East, the following special provisions shall apply:
 - a) Notwithstanding Subsection 10.5.1, the following uses shall be limited to the following:
 - i) Single Detached Dwelling
 - ii) Office located within the building existing at the time of the passing of the By-law
 - b) Notwithstanding Subsection 10.5.3a), the minimum Front Yard Setback is 15.0 metres.
 - c) Notwithstanding Subsection 10.5.3g)v), the regulation shall not apply.
- 566. Within the lands zoned Mixed Use Medium Pedestrian Focus (C5a) Zone, identified on Map 1040 and 1086 of Schedule "A" Zoning Maps and described as 37 and 39 Cliff Avenue, and 569 Concession Street, the special provisions shall apply:
 - a) Notwithstanding Section 10.5a.1, permitted uses are limited to the following:
 - i) Dwelling Units in Conjunction with a Commercial Use
 - ii) Medical Clinic
 - iii) Office
 - iv) Personal Service
 - v) Social Services Establishment
 - vi) Studio
- 567. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 1280 and 1281 of Schedule "A" Zoning Maps and described as 54 Wilson Street West, the following special provisions shall apply:
 - a) Notwithstanding Subsections 10.5.3 d) ii) and iii), the following regulations shall also apply:
 - i) Maximum Building 11.0 metres. Height

(Page 170 of 247)

ii) Access

- No access shall be permitted from Carrington Court to the subject lands.
- 568. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 1175 of Schedule "A" Zoning Maps and described as 370 Wilson Street East, the following special provisions shall apply:
 - a) In addition to Section 10.5a.1 and notwithstanding Section 10.5a.2) ii), the following use shall also be permitted:
 - i) Drive through facility within the building existing as of August 16, 2013.
 - b) Notwithstanding Subsection 10.5a.3 d) ii) and iii), the maximum building height of 9.0 metres shall be permitted.
- 569. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 1175 of Schedule "A" Zoning Maps and described as 385 Wilson Street East, the following special provisions shall apply:
 - a) Notwithstanding Subsection 10.5a.3 d) ii) and iii) a maximum building height of 12.63 metres shall be permitted.
- 570. Within the lands zoned District Commercial (C6) Zone, Mixed Use Medium Density (C5) Zone and Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Maps 860, 861, 903, 907, 908, 946, 947, 948, 988, 990, 1124, 1175, 1228, 1229, 1280, 1281, 1911, 1912, 1934, 1935 and 1956 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number
15 Albert Street	860
Binbrook, Con. 3, Blk 3, Part Lot 5	1935
2548 Binbrook Road	1935
2553 Binbrook Road	1935
2562 Binbrook Road	1935
2567 Binbrook Road	1935
2572 Binbrook Road	1935
2575 Binbrook Road	1935
2583 Binbrook Road	1935
2584 Binbrook Road	1935
2592 Binbrook Road	1935
2600 Binbrook Road	1935
Plan 62M 1016, Block 103	1935
2617 Binbrook Road	1934 and 1935
2620 Binbrook Road	1935
2623 Binbrook Road	1935

(Page 171 of 247)

Bronorty Address	Map Number
Property Address 2630 Binbrook Road	
	1935
2640 Binbrook Road	1935
2623 Binbrook Road	1935
2630 Binbrook Road	1935
2640 Binbrook Road	1935
2641 Binbrook Road	1934 and 1935
2646 Binbrook Road	1934 and 1935
2647 Binbrook Road	1934 and 1935
2653 Binbrook Road	1934
2654 Binbrook Road	1934 and 1935
2657 Binbrook Road	1934
2660 Binbrook Road	1934
2665 Binbrook Road	1934
2666 Binbrook Road	1935
2680 Binbrook Road	1934
3015 Binbrook Road	1934
3020 Binbrook Road	1934
3027 Binbrook Road	1934
3028 Binbrook Road	1934
3034 Binbrook Road	1934
3038 Binbrook Road	1934
3042 Binbrook Road	1934
3048 Binbrook Road	1934
3060 Binbrook Road	1934
3072 Binbrook Road	1934
3073 Binbrook Road	1934
3078 Binbrook Road	1934
3084 Binbrook Road	1934
3089 Binbrook Road	1934
3092 Binbrook Road	1934
3100 Binbrook Road	1934
3105 Binbrook Road	1934
3106 Binbrook Road	1934
3114 Binbrook Road	1934
3115 Binbrook Road	1934
3125 Binbrook Road	1934
3130 Binbrook Road	1934
2 Bond Street South	907
2 Bond Street South	907
6 Bond Street South	907
10 Bond Street South	907
53 Carrington Court	1280 and 1281
1 Cross Street	861
3 Cross Street	861

(Page 172 of 247)

Branarty Address	Map Number
Property Address	861
5 Cross Street	
7 Cross Street	861
11 Cross Street	861
Part of 14 and 16 Cross Street	861
103 Emerson Street	948
104 Emerson Street	948
105 Emerson Street	948
106 Emerson Street	948
109 Emerson Street	948
110 Emerson Street	948
112 Emerson Street	948
113 Emerson Street	948
114 Emerson Street	948
116 Emerson Street	948
117 Emerson Street	948
119 Emerson Street	948
120 Emerson Street	948
125 Emerson Street	948
131 Emerson Street	948
135 Emerson Street	948 and 990
136 Emerson Street	948 and 990
139 Emerson Street	948 and 990
142 Emerson Street	948 and 990
143 Emerson Street	990
144 Emerson Street	990
150 Emerson Street	990
151 Emerson Street	990
10 Ewen Road	947
11 Ewen Road	947
4 Fall Fair Way	1911 and 1912
10 Fall Fair Way	1911 and 1912
39 Garinger Crescent	1911
15 Great Oak Trail	1934
37 Halson Street	1229
2400 Regional Road 56	1911 and 1912
Part of 2431 Regional Road 56	1912
2441 Regional Road 56	1912
2450 Regional Road 56	1911 and 1912
2451 Regional Road 56	1912
2461 Regional Road 56	1912
2471 Regional Road 56	1912
2471 Regional Road 56	1911 and 1912
2486 Regional Road 56	1911 and 1912
2487 Regional Road 56	1912

(Page 173 of 247)

Dranarty Addraga	Man Number
Property Address	Map Number
2490 Regional Road 56	1911 and 1912
2501 Regional Road 56	1912
2506 Regional Road 56	1911 and 1912
2525 Regional Road 56	1912
2532 Regional Road 56	1911
2537 Regional Road 56	1912
2544 Regional Road 56	1911
2545 Regional Road 56	1912
2550 Regional Road 56	1912
2555 Regional Road 56	1912
2565 Regional Road 56	1911,1912 and 1935
2575 Regional Road 56	1911,1912, 1934 and 1935
2585 Regional Road 56	1934 and 1935
2595 Regional Road 56	1934 and 1935
2600 Regional Road 56	1934
2605 Regional Road 56	1934 and 1935
2610 Regional Road 56	1934
2620 Regional Road 56	1934
2621 Regional Road 56	1934 and 1935
2626 Regional Road 56	1934
2634 Regional Road 56	1934
2640 Regional Road 56	1934
Part of 2641 Regional Road 56	1934 and 1935
2651 Regional Road 56	1934
2666 Regional Road 56	1934
3011 Regional Road 56	1934
3013 Regional Road 56	1934
3029 Regional Road 56	1934
3033 Regional Road 56	1934
3038 Regional Road 56	1934
3041 Regional Road 56	1934
3044 Regional Road 56	1934
3046 Regional Road 56	1934
3047 Regional Road 56	1934
3053 Regional Road 56	1934
3056 Regional Road 56	1934
3059 Regional Road 56	1934
3064 Regional Road 56	1934
3065 Regional Road 56	1934
3070 Regional Road 56	1934
3078 Regional Road 56	1934
3079 Regional Road 56	1934
3084 Regional Road 56	1934
3087 Regional Road 56	1934
223g.c.iai i toaa 00	

(Page 174 of 247)

Property Address	Map Number
3097 Regional Road 56	1934
3111 Regional Road 56	1934 and 1956
	1956
3125 Regional Road 56 3137 Regional Road 56	1956
3150 Regional Road 56	1956
3153 Regional Road 56	1956
3160 Regional Road 56	1956
3167 Regional Road 56	1956
3168 Regional Road 56	1956
3180 Regional Road 56	1956
3181 Regional Road 56	1956
3190 Regional Road 56	1956
3194 Regional Road 56	1956
3200 Regional Road 56	1956
7 John Street	860
1 King Street East	861
2 King Street East	861
	861
3 King Street East 5 King Street East	861
7 King Street East	861
8 King Street East	861
9 King Street East	861
10 King Street East	861
11 King Street East	861
12 King Street East	861
23 King Street East	861
27 King Street East	861
49 King Street East	861
1 King Street West	861
2 King Street West	861
3 King Street West	861
7 King Street West	861
9 King Street West	861
10 King Street West	861
11 King Street West	861
12 King Street West	861
13 King Street West	861
14 King Street West	861
15 King Street West	861
18 King Street West	861
19 King Street West	861
21 King Street West	861
22 King Street West	861
24 King Street West	861
24 Mily Suect West	001

(Page 175 of 247)

Property Address	Map Number
25 King Street West	861
26 King Street West	861
28 King Street West	861
32 King Street West	860 and 861
33 King Street West	861
36 King Street West	860 and 861
38 King Street West	860 and 861
40 King Street West	860
41 King Street West	861
43 King Street West	861
44 King Street West	860
45 King Street West	860 and 861
46 King Street West	860
48 King Street West	860
49 King Street West	860 and 861
50 King Street West	860
51 King Street West	860
55 King Street West	860
56 King Street West	860
57 King Street West	860
58 King Street West	860
59 King Street West	860
61 King Street West	860
62 King Street West	860
63 King Street West	860
65 King Street West	860
66 King Street West	860
67 King Street West	860
70 King Street West	860
71 King Street West	860
75 King Street West	860
77 King Street West	860
82 King Street West	860
83 King Street West	860
89 King Street West	860
90 King Street West	860
93 King Street West	860
105 King Street West	860
107 King Street West	860
112 King Street West	860
113 King Street West	860
115 King Street West	860
116 King Street West	860
117 King Street West	860

(Page 176 of 247)

Property Address	Map Number
118 King Street West	860
121 King Street West	860
126 King Street West	860
130 King Street West	860
132 King Street West	860
134 King Street West	860
138 King Street West	860
142 King Street West	860
144 King Street West	860
146 King Street West	860
153 King Street West	860
155 King Street West	860
157 King Street West	860
159 King Street West	860
160 King Street West	860
168 King Street West	860
169 King Street West	860
170 King Street West	860
173 King Street West	860
174 King Street West	860
178 King Street West	860
179 King Street West	860
181 King Street West	860
182 King Street West	860
183 King Street West	860
184 King Street West	860
186 King Street West	860
190 King Street West	860
194 King Street West	860
195 King Street West	860
199 King Street West	860
200 King Street West	860
203 King Street West	860
207 King Street West	860
209 King Street West	860
732 King Street West	908
734 King Street West	908
736 King Street West	908
738 King Street West	908
742 King Street West	908
746 King Street West	908
750 King Street West	908
754 King Street West	908
756 King Street West	908
. 55 mig 555t 1155t	1

(Page 177 of 247)

Property Address Map Number 766 King Street West 908 768 King Street West 908 772 King Street West 908 775 King Street West 908 777 King Street West 908 780 King Street West 908 782 King Street West 908 784 King Street West 908 785 King Street West 908 780 King Street West 908 790 King Street West 908 791 King Street West 908 802 King Street West 908 804 King Street West 908 805 King Street West 908 811 King Street West 908 824 King Street West 908 824 King Street West 908 824 King Street West 908 825 King Street West 908 846 King Street West 908 850 King Street West 908 850 King Street West 908 860 King Street West 908 860 King Street West 908
768 King Street West 908 772 King Street West 908 775 King Street West 908 777 King Street West 908 780 King Street West 908 782 King Street West 908 784 King Street West 908 785 King Street West 908 789 King Street West 908 790 King Street West 908 791 King Street West 908 797 King Street West 908 802 King Street West 908 804 King Street West 908 811 King Street West 908 816 King Street West 908 824 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 845 King Street West 908 856 King Street West 908 856 King Street West 908 866 King Street West 908 866 King Street West 907 868 King Street West 907 and 908
772 King Street West 908 775 King Street West 908 777 King Street West 908 780 King Street West 908 782 King Street West 908 784 King Street West 908 785 King Street West 908 789 King Street West 908 790 King Street West 908 791 King Street West 908 802 King Street West 908 804 King Street West 908 811 King Street West 908 816 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 841 King Street West 908 842 King Street West 908 843 King Street West 908 844 King Street West 908 855 King Street West 908 866 King Street West 908 866 King Street West 907 868 King Street West 907 and 908 867 King Street West 907 and 908 868 King Street West 907 and 908
775 King Street West 908 777 King Street West 908 780 King Street West 908 782 King Street West 908 784 King Street West 908 785 King Street West 908 789 King Street West 908 790 King Street West 908 791 King Street West 908 802 King Street West 908 804 King Street West 908 804 King Street West 908 811 King Street West 908 824 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 845 King Street West 908 856 King Street West 908 856 King Street West 908 866 King Street West 908 866 King Street West 907 867 King Street West 907 868 King Street West 907 868 King Street West 907 868 King Street West 907
777 King Street West 908 780 King Street West 908 782 King Street West 908 784 King Street West 908 785 King Street West 908 789 King Street West 908 790 King Street West 908 791 King Street West 908 802 King Street West 908 804 King Street West 908 811 King Street West 908 816 King Street West 908 824 King Street West 908 825 King Street West 908 840 King Street West 908 840 King Street West 908 845 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 866 King Street West 908 866 King Street West 908 866 King Street West 907 876 King Street West 907 877 King Street West 907 878 King Street West 907 878 King Street West 907
780 King Street West 908 782 King Street West 908 784 King Street West 908 785 King Street West 908 789 King Street West 908 790 King Street West 908 791 King Street West 908 802 King Street West 908 804 King Street West 908 805 King Street West 908 811 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 840 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 866 King Street West 908 866 King Street West 908 866 King Street West 907 876 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
782 King Street West 908 784 King Street West 908 785 King Street West 908 789 King Street West 908 790 King Street West 908 791 King Street West 908 802 King Street West 908 804 King Street West 908 805 King Street West 908 811 King Street West 908 816 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 845 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 866 King Street West 908 866 King Street West 907 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
784 King Street West 908 785 King Street West 908 789 King Street West 908 790 King Street West 908 797 King Street West 908 802 King Street West 908 804 King Street West 908 811 King Street West 908 816 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 848 King Street West 908 850 King Street West 908 854 King Street West 908 855 King Street West 908 866 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
785 King Street West 908 789 King Street West 908 790 King Street West 908 791 King Street West 908 802 King Street West 908 804 King Street West 908 811 King Street West 908 816 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 848 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 866 King Street West 908 864 King Street West 908 865 King Street West 907 and 908 866 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907 878 King Street West 907
789 King Street West 908 790 King Street West 908 791 King Street West 908 802 King Street West 908 804 King Street West 908 811 King Street West 908 816 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 848 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 865 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
790 King Street West 908 791 King Street West 908 797 King Street West 908 802 King Street West 908 804 King Street West 908 811 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 848 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 865 King Street West 908 866 King Street West 907 and 908 867 King Street West 907 and 908 876 King Street West 907 and 908 876 King Street West 907 878 King Street West 907 878 King Street West 907
791 King Street West 908 797 King Street West 908 802 King Street West 908 804 King Street West 908 811 King Street West 908 816 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 848 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 865 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
797 King Street West 908 802 King Street West 908 804 King Street West 908 811 King Street West 908 816 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 866 King Street West 907 867 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907 878 King Street West 907
802 King Street West 908 804 King Street West 908 811 King Street West 908 816 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 848 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 865 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
804 King Street West 908 811 King Street West 908 816 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 850 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 865 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
811 King Street West 908 816 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 848 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 865 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
816 King Street West 908 824 King Street West 908 832 King Street West 908 840 King Street West 908 848 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
824 King Street West 908 832 King Street West 908 840 King Street West 908 848 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 865 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
832 King Street West 908 840 King Street West 908 848 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
840 King Street West 908 848 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 866 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
848 King Street West 908 850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 866 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
850 King Street West 908 854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 866 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
854 King Street West 908 856 King Street West 908 860 King Street West 908 864 King Street West 908 866 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
856 King Street West 908 860 King Street West 908 864 King Street West 908 866 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
860 King Street West 908 864 King Street West 908 866 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
864 King Street West 908 866 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
866 King Street West 907 and 908 868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
868 King Street West 907 and 908 870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
870 King Street West 907 and 908 876 King Street West 907 878 King Street West 907
876 King Street West907878 King Street West907
878 King Street West 907
•
_
881 King Street West 907
889 King Street West 907
893 King Street West 907
895 King Street West 907
897 King Street West 907
899 King Street West 907
925 King Street West 907
938 King Street West 907
942 King Street West 907
944 King Street West 907
946 King Street West 907
948 King Street West 907
950 King Street West 907

(Page 178 of 247)

Droporty Addrops	Man Number
Property Address	Map Number 907
951 King Street West 955 King Street West	907
972 King Street West	907
981 King Street West	907
985 King Street West	907
986 King Street West	907
988 King Street West	907
990 King Street West	907
992 King Street West	907
998 King Street West	907
999 King Street West	907
1000 King Street West	907
1004 King Street West	907
1005 King Street West	907
1006 King Street West	907
1008 King Street West	907
1009 King Street West	907
1011 King Street West	907
1012 King Street West	907
1014 King Street West	907
1015 King Street West	907
1018 King Street West	907
1019 King Street West	907
1020 King Street West	907
1023 King Street West	907
1024 King Street West	907
1027 King Street West	907
1028 King Street West	907
1030 King Street West	907
1031 King Street West	907
1033 King Street West	907
1034 King Street West	907
1035 King Street West	907
1036 King Street West	907
1037 King Street West	907
1038 King Street West	907
1041 King Street West	907
1043 King Street West	907
1044 King Street West	907
1045 King Street West	907
1046 King Street West	907
1048 King Street West	907
1049 King Street West	907
1050 King Street West	907

(Page 179 of 247)

Branarty Address	Man Number
Property Address	Map Number
1056 King Street West	907
1059 King Street West	907
1060 King Street West	907
1061 King Street West	907
1066 King Street West	907
1067 King Street West	907
4, 8 Longwood Road North	907
45 Maggie Johnson Drive	1912
3 Main Street	861
8 Main Street	861 and 903
11, 13, 15 Main Street	861 and 903
23 Main Street	861 and 903
24 Main Street	903
26 Main Street	903
28 Main Street	903
30 Main Street	903
32 Main Street	903
34 Main Street	903
53 Main Street	903
56 Main Street	903
58 Main Street	903
63 Main Street	903
1481 Main Street West	947
1483 Main Street West	947
1487 Main Street West	947
1501 Main Street West	947
1503 Main Street West	947
1507 Main Street West	947
1546 Main Street West	947
1550 Main Street West	947
1551 Main Street West	947
1554 Main Street West	947
1555 Main Street West	947
1556 Main Street West	947
1557 Main Street West	947
1559 Main Street West	947
1560 Main Street West	947
1561 Main Street West	947
1564 Main Street West	947
1566 Main Street West	947
1568 Main Street West	947
1574 Main Street West	947
1580 Main Street West	947
1590 Main Street West	947
1000 Maiii Olioot Woot	· · ·

(Page 180 of 247)

Proporty Address	Map Number
Property Address 1610 Main Street West	947
1612 Main Street West	947
1629 Main Street West	947
1630 Main Street West	947
1632 Main Street West	947
1635 Main Street West	947
1655 Main Street West	947
8 McMurray Street	860
4, 8 North Oval	907
4 Ogilvie Street	861
5 Ogilvie Street	861 and 903
8 Ogilvie Street	861
10 Ogilvie Street	861
15 Ogilvie Street	903
17 Ogilvie Street	903
21 Ogilvie Street	903
4, 8 Paisley Avenue North	907
2, 4 Paisley Avenue South	907
11 Paisley Avenue South	907
224 Cline Avenue North	907
47 Royal Avenue	990
49 Royal Avenue	990
6 Sydenham Street	860
9 Sydenham Street	860
11 Sydenham Street	860
37 Ward Avenue	948
41 Ward Avenue	948
44, 48 Ward Avenue	948
1 Westbourne Road	947
193 Wilson Street East	1228
201 Wilson Street East	1228 Appealed by Appellant No. 17
213 Wilson Street East	1228 (Rolanco Network Inc.).
219 Wilson Street East	1228
223 Wilson Street East	1228
231 Wilson Street East	1228
240 Wilson Street East	1228 and 1229
241 Wilson Street East	1228 and 1229
245 Wilson Street East	1228 and 1229
253 Wilson Street East	1228 and 1229
259 Wilson Street East	1228 and 1229
277 Wilson Street East	1229 and 1175
280 Wilson Street East	1229 and 1175
283 Wilson Street East	1175
284 Wilson Street East	1175

(Page 181 of 247)

Draparty Addraga	Man Number
Property Address	Map Number
286 Wilson Street East	1175
287 Wilson Street East	1175
289 Wilson Street East	1175
Part of 291 Wilson Street East	1129 and 1175
293 Wilson Street East	1175
297 Wilson Street East	1175
300 Wilson Street East	1175
303 Wilson Street East	1175
310 Wilson Street East	1175
311 Wilson Street East	1175
312 Wilson Street East	1175
314 Wilson Street East	1175
323 Wilson Street East	1175
326 Wilson Street East	1175
327 Wilson Street East	1175
334 Wilson Street East	1175
335 Wilson Street East	1175
339 Wilson Street East	1175
340 Wilson Street East	1175
342 Wilson Street East	1175
343 Wilson Street East	1175
346 Wilson Street East	1175
347 Wilson Street East	1175
349 Wilson Street East	1175
356 Wilson Street East	1175
363 Wilson Street East	1175
365 Wilson Street East	1175
367 Wilson Street East	1175
371 Wilson Street East	1175
375 Wilson Street East	1175
378 Wilson Street East	1175
380 Wilson Street East	1175
382 Wilson Street East	1175
386 Wilson Street East	1175
389 Wilson Street East	1174 and 1175
392 Wilson Street East	1175
397 Wilson Street East	1175
398 Wilson Street East	1175
400 Wilson Street East	1175
402 Wilson Street East	1175
401 Wilson Street East	1175
406 Wilson Street East	1175
407 Wilson Street East	1175
412 Wilson Street East	1175
TIZ WIISON ONEEN LASI	1110

(Page 182 of 247)

Dranarty Addraga	Man Number
Property Address	Map Number
413 Wilson Street East	1175
419 Wilson Street East	1175
420 Wilson Street East	1175
425 Wilson Street East	1175
426 Wilson Street East	1175
430 Wilson Street East	1175
436 Wilson Street East	1175
442 Wilson Street East	1175
449 Wilson Street East	1124 and 1175
450 Wilson Street East	1175
454 Wilson Street East	1175
462 Wilson Street East	1124 and 1175
469 Wilson Street East	1124
548 Old Dundas Road	1124
16 Wilson Street West	1281
33 Wilson Street West	1281
35 Wilson Street West	1280 and 1281
81 Wilson Street West	1280
88 Wilson Street West	1280
95 Wilson Street West	1280
98 Wilson Street West	1280
110 Wilson Street West	1280
114 Wilson Street West	1280
120 Wilson Street West	1280
124 Wilson Street West	1280

The following special provisions shall apply:

- a) Notwithstanding Subsections 10.6.3 d), 10.5.3 d) ii) and iii) and 10.5a.3
 d) ii) and iii), a maximum building height of 11.0 metres shall be permitted.
- b) Notwithstanding Clause a), a maximum building height of 9.0 metres shall be permitted on those lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone and described as follows:

Property Address	Map Number
37 Halson Street	1229
193 Wilson Street East	1228
201 Wilson Street East	1228 Appealed by Appellant No. 17
213 Wilson Street East	1228 (Rolanco Network Inc.).
219 Wilson Street East	1228
223 Wilson Street East	1228
231 Wilson Street East	1228 and 1229

(Page 183 of 247)

Property Address	Map Number
240 Wilson Street East	1228 and 1229
259 Wilson Street East	1228 and 1229
277 Wilson Street East	1229 and 1175
280 Wilson Street East	1229 and 1175
283 Wilson Street East	1175
284 Wilson Street East	1175
286 Wilson Street East	1175
287 Wilson Street East	1175
289 Wilson Street East	1174 and 1175
293 Wilson Street East	1175
297 Wilson Street East	1175
300 Wilson Street East	1175
303 Wilson Street East	1175
310 Wilson Street East	1175
311 Wilson Street East	1175
312 Wilson Street East	1175
314 Wilson Street East	1175
323 Wilson Street East	1175
326 Wilson Street East	1175
327 Wilson Street East	1175
334 Wilson Street East	1175
335 Wilson Street East	1175
339 Wilson Street East	1175
340 Wilson Street East	1175
342 Wilson Street East	1175
343 Wilson Street East	1175
346 Wilson Street East	1175
347 Wilson Street East	1175
356 Wilson Street East	1175
363 Wilson Street East	1175
365 Wilson Street East	1175
367 Wilson Street East	1175
371 Wilson Street East	1175
375 Wilson Street East	1175
378 Wilson Street East	1175
380 Wilson Street East	1175
389 Wilson Street East	1175
392 Wilson Street East	1175
397 Wilson Street East	1175
398 Wilson Street East	1175
400 Wilson Street East	
401 Wilson Street East	1175 1175
402 Wilson Street East	1175
406 Wilson Street East	1175

(Page 184 of 247)

Property Address	Map Number
407 Wilson Street East	1175
412 Wilson Street East	1175
413 Wilson Street East	1175
419 Wilson Street East	1175
420 Wilson Street East	1175
425 Wilson Street East	1175
426 Wilson Street East	1175
430 Wilson Street East	1175
436 Wilson Street East	1175
442 Wilson Street East	1175
449 Wilson Street East	1124 and 1175
450 Wilson Street East	1175
454 Wilson Street East	1175
462 Wilson Street East	1124 and 1175
469 Wilson Street East	1124

- 571. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 1177 of Schedule "A" Zoning Maps and described as 737 and 771 Golf Links Road, the following special provision shall apply:
 - a) Notwithstanding Subsection 10.5.1 and in addition to Subsection 10.5.2, a department store and grocery store shall also not be permitted.
- 572. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 1175 of Schedule "A" Zoning Maps and described as 393 Wilson Street East, the following special provisions shall apply:
 - a) In addition to the definition of Landscaping in Section 3: Definitions, for the purposes of Special Exception No. 572, the definition of Landscaping may also include a transformer pad.
 - b) General Provisions
 - i) Notwithstanding Subsection 4.6 a),
 - 1. The eaves and troughs for the building may be permitted in any yard provided that no such feature shall project more than 0.7 metres into any minimum side yard, or 1.6 metres into any minimum front or minimum rear yard; and,
 - 2. The eaves and troughs for an accessory structure shall not extend more than 0.3 metres into a required yard.
 - ii) Notwithstanding Subsections 4.8.1 b) to h), the following special regulations shall apply:

(Page 185 of 247)

- 1. Accessory buildings shall not be located in a side yard;
- 2. Accessory buildings shall be located a minimum of 0.75 metres from any lot line;
- 3. The maximum Gross Floor Area for accessory buildings shall be 90 square metres provided the coverage of all buildings on the lot does not exceed a Maximum Lot Coverage of 30%; and,
- 4. The maximum height for accessory buildings shall be 4.5 metres.

c) Parking Regulations

- i) Notwithstanding Subsections 5.1 a) ii), iii) and iv), and 5.2 b), d), f), h) and i), each parking space shall:
 - Parking areas may be located within 150 metres of the lot occupied by the commercial building, subject to a registered agreement that such areas shall be reserved for the exclusive use of the subject commercial building;
 - 2. Each parking space shall have a minimum width of 2.6 metres and a minimum length of 5.5 metres; and,
 - 3. Each barrier free parking space shall have a minimum width of 3.5 metres and a minimum length of 5.5 metres.
- ii) In addition to Sections 5 and 10.5a, the following regulations shall also apply:
 - Each commercial parking space shall be maintained for the shared use between the commercial use and the residential visitor use;
 - Each commercial parking space shall have a sign erected and legibly marked that the parking spaces are for the use of both the commercial and residential visitor parking;
 - 3. Each commercial parking space shall be maintained readily accessible for either use, free and clear of all obstructions;
 - Any below-grade communal parking structure shall require a minimum side yard and minimum rear yard setback of 1.5 metres and shall require from any street line the same setback as the principal building; and,

(Page 186 of 247)

- All parking areas containing four or more spaces shall have lighting sufficient in intensity and number to provide for public safety, such lighting shall be directed away from abutting properties and streets, and the equipment shall be permanently maintained.
- iii) Notwithstanding Subsection 5.6 c), parking spaces shall be provided and maintained at a rate of:

Dwelling Unit	2.0 per unit
Commercial Unit	3.0 per unit

- d) Notwithstanding Subsections 10.5a.1 and 10.5a.2 i), only the following uses shall be permitted:
 - i) Artist Studio
 - ii) Auctioneer Establishment
 - iii) Catering Service
 - iv) Commercial Recreation
 - v) Commercial School
 - vi) Community Garden
 - vii) Craftsperson Shop
 - viii) Day Nursery
 - ix) Dwelling Unit in conjunction with a Commercial Use
 - x) Financial Establishment
 - xi) Funeral Home
 - xii) Office
 - xiii) Personal Service
 - xiv) Post Office
 - xv) Restaurant
 - xvi) Repair Service
 - xvii) Retail
 - xviii) Tradesperson's Shop
 - xix) Urban Farm
 - xx) Urban Farmer's Market
- e) In addition to Subsection 10.5a.1.1 i) and ii), the following uses shall be permitted in accordance with the following restrictions:
 - i) Uses Only Permitted on the Ground Floor
 - 1. One (1) commercial ground floor unit having a maximum gross floor area of 54 square metres.

(Page 187 of 247)

- ii) Uses Only Permitted Above the Ground Floor
 - 1. Notwithstanding Subsection 10.5a.1, a maximum of six (6) dwelling units shall be permitted above the ground floor; and,
 - 2. Notwithstanding Clause e) ii) 1., access, parking areas, accessory office and utility areas for the residential uses may be provided at the ground level.
- f) In addition to Subsection 10.5a.2, the following uses shall be prohibited, even as an accessory use:
 - i) Laboratory
 - ii) Medical Clinic
 - iii) Private Club or Lodge
- g) Notwithstanding Subsections 10.5a.3, 10.5a.6 and 10.5a.7, the following regulations shall apply:

i)	Maximum Lot Coverage	62%
ii)	Maximum Building Setback from a Streetline	3.4 metres
iii)	Minimum Rear Yard	12 metres
iv)	Maximum Height	10.8 metres
v)	Minimum Landscape Coverage	30%

- 573. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 481 and 482 of Schedule "A" Zoning Maps and described as 61 Hamilton Street North, the following special provision shall apply:
 - a) In addition to Subsection 10.5.1, the existing building and lumber supply establishment shall also be permitted.
- 574. Within the lands zoned Neighbourhood Commercial (C2) Zone, identified on Map 999 of Schedule "A" Zoning Maps and described as 1099 and 1101 Cannon Street East and 164 Kensington Avenue North, the following special provision shall apply:
 - a) In addition to Subsection 10.2.1, the manufacturing of pasta products shall also be permitted.

(Page 188 of 247)

- 575. Within the lands zoned Community Commercial (C3) Zone, identified on Maps 954 and 955 of Schedule "A" Zoning Maps and described as 24 to 60 Sanford Avenue North, the following special provision shall apply:
 - a) In addition to Subsection 10.3.1, a Warehouse shall also be permitted.
- 576. Within the lands zoned Community Commercial (C3) Zone, identified on Map 1100 of Schedule "A" Zoning Maps and described as 518 Fruitland Road, the following special provision shall apply:
 - a) Notwithstanding Subsection 10.3.1, permitted uses shall be limited to a Restaurant, private club, Office or any similar use within the existing building provided that the basic structure and character of the building is maintained.
- 577. Within the lands zoned Neighbourhood Commercial (C2) Zone, identified on Map 1051 of Schedule "A" Zoning Maps and described as 199 and 213 North Service Road, the following special provisions shall apply:
 - a) In addition to Subsection 10.2.1, the following uses shall also be permitted:
 - i) Sales and service of lawn and marine equipment
 - ii) Lawn and garden centre
 - iii) Growing and retail sales of greenhouse produce and uses accessory thereto
 - b) In addition to Subsection 10.2.2 and notwithstanding Subsection 10.2.1, the following uses shall also be prohibited:
 - i) Any residential use
 - ii) Any outdoor operations and outdoor display
 - c) Notwithstanding Subsection 10.2.3 l) the following regulation shall also apply:
 - i) A maximum of 310.0 square metres of outdoor storage area shall be permitted and shall be totally enclosed by a fence having a minimum height of 1.8 metres and screened from view of the North Service Road by landscaping, decorative walls or any combination thereof.
- 578. Within the lands zoned Mixed Use Medium (C5) Zone, identified on Map 1178 Schedule "A" Zoning Maps and described as:

Property Address	Map Number
1000 Golf Links Road	1178

(Page 189 of 247)

1136 Golf Links Road	1178
----------------------	------

The following special provisions shall apply:

- a) In addition to Subsection 10.5.2, fast food restaurants and restaurants with drive-through service shall be prohibited.
- b) The maximum Gross Floor Area of Food Store and Department Store shall be 950 square metres per individual establishment.
- c) The following regulations shall apply to 1000 Golf Links Road:
 - i) Notwithstanding the definition of Lot Line Front in Section 3: Definitions, the front lot line shall be defined as the lot line flanking Golf Links Road.
 - ii) Notwithstanding Subsection 10.5.3 b) and c) the following regulations shall apply:
 - 1) Minimum Rear Yard 11.0 metres.
 - 2) Minimum Easterly Side 3.0 metres. Yard
 - iii) Notwithstanding Subsection 5.6 c), a minimum of 109 parking spaces and 4 handicapped parking spaces shall be provided.
- d) Notwithstanding Subsection 10.5.3 b) and c), the following regulations shall apply to 1136 Golf Links Road for a Motor Vehicle Gas Bar:
 - i) Minimum Rear Yard 3.0 metres.
 - ii) Minimum Side Yard 3.0 metres.
- 579. Within the lands zoned Neighbourhood Commercial (C2) Zone and Community Commercial (C3) Zone, identified on Maps 1100, 1145, 1146, 1150, 1185, 1194, 1196, 1198, 1199, 1205, 1247, 1248, 1249, 1251, 1252, 1259, 1260, 1305, 1306, 1403, 1405, 1454, 1503 and 1640 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number
168 Barton Street	1145
178 Barton Street	1145
188 Barton Street	1145
198 Barton Street	1145
210 Barton Street	1145

(Page 190 of 247)

Proporty Address	Map Number
Property Address 214 Barton Street	1145
232 Barton Street	1146
274 Barton Street	1146
276 Barton Street	1146
386 Barton Street	1198
412 Barton Street	1198
520 Barton Street	1199
2800 Barton Street East	1145
2806 Barton Street East	1145
2814 Barton Street East	1145
2820 Barton Street East	1145
2824 Barton Street East	1145
2842 Barton Street East	1145
1365 Baseline Road	1259
1367 Baseline Road	1259
92 Centennial Parkway South	1194
57 East Street	1205
61 East Street	1205
63 East Street	1205
67 East Street	1205
71 East Street	1205
500 Fifty Road	1259 and 1260
518 Fruitland Road	1100
110 Gordon Drummond Avenue	1503
288 Grays Road	1145
294 Grays Road	1145
298 Grays Road	1145
302 Grays Road	1145
304 Grays Road	1145
305 Grays Road	1145
308 Grays Road	1145
309 Grays Road	1145
312 Grays Road	1145
316 Grays Road	1145
80 Green Mountain Road	1405
364 Highway 8	1251
410 Highway 8	1252
411 Highway 8	1252
418 Highway 8	1252
419 Highway 8	1252
420 Highway 8	1252
421 Highway 8	1252
423 Highway 8	1252
424 Highway 8	1252
TET I ligitiway 0	ILUL

(Page 191 of 247)

Property Address	Map Number
426 Highway 8	1252
427 Highway 8	1252
430 Highway 8	1252
432 Highway 8	1252
436 Highway 8	1252
438 Highway 8	1252
440 Highway 8	1252
446 Highway 8	1252
448, 450 Highway 8	1252
452 Highway 8	1252
454 Highway 8	1252 and 1305
466 Highway 8	1252 and 1305
483 Highway 8	1252
171 Margaret Avenue	1252
173 Margaret Avenue	1252
520 Highway 8	1305
521 Highway 8	1252 and 1305
538 Highway 8	1305
542, 548 Highway 8	1305 and 1306
570 Highway 8	1306
604 Highway 8	1306
100 King Street West	1248
102 King Street West	1247 and 1248
30 Lake Avenue Drive	1248 and 1249
32 Lake Avenue Drive	1248 and 1249
36 Lake Avenue Drive	1248 and 1249
3 Lockport Way	1260
15 Lockport Way	1260
256, 270, 276, 280, 284, 288, 294,	1454
300 Mud Street West	
74 Neil Avenue	1194
Part of 821 North Service Road	1150
1050 Paramount Drive	1403 and 1454
Part of 2157 Rymal Road and	1596 and 1640
Concession 8 Pt Lot 27 SLT SC	
RP 62R15203	
775-779 Upper Wentworth Street	1185 and 1239
524, 526, 530 Winona Road	1205
· ,	1

The following special provisions shall apply:

a) Notwithstanding Subsections 10.2.3 e) and 10.3.3 f) and g) the maximum gross floor area of any individual commercial establishment shall be 500.0 square metres; and,

(Page 192 of 247)

- b) Notwithstanding Subsection 10.2.3 h, the maximum gross floor area of any grouping of commercial uses shall be 1,500.0 square metres.
- 580. Within the lands zoned District Commercial (C6) Zone, identified on Maps 947, 1710, 1711, 1748, 1749 and 1785 of Schedule "A" Zoning Maps and describes as:

Property Address	Map Number
20 Ewen Road	947
22 Ewen Road	947
28 Ewen Road	947
5 Ofield Road	947
58 Ewen Road	947
60 Ewen Road	947
8521 Airport Road	1749
8526 Airport Road	1749
8527 Airport Road	1749
8533 Airport Road	1748, 1749
8536 Airport Road	1749
8541 Airport Road	1748, 1749
8552 Airport Road	1748, 1749
8555 Airport Road	1748
8558 Airport Road	1748
9013 Airport Road	1748
9023 Airport Road	1748
9026 Airport Road	1748
9027 Airport Road	1748
9031 Airport Road	1748
9032 Airport Road	1748
9037 Airport Road	1748
9038 Airport Road	1748
9045 Airport Road	1748
9046 Airport Road	1748
9056 Airport Road	1748
9061 Airport Road	1748
9066 Airport Road	1748
9074 Airport Road	1748
9075 Airport Road	1748
9078 Airport Road	1748
9086 Airport Road	1748
9089 Airport Road	1748
9092 Airport Road	1748
9100 Airport Road	1748
9105 Airport Road	1748

(Page 193 of 247)

Property Address	Map Number
Part of 9110 Airport Road	1748
9115 Airport Road	1748
Part of 9120 Airport Road	1748
9125 Airport Road	1748
Part of 9132 Airport Road	1748
9135 Airport Road	1748
9142 Airport Road	1748
9152 Airport Road	1748
9158 Airport Road	1748
9166 Airport Road	1748
9169 Airport Road	1748
9174 Airport Road	1748
9178 Airport Road	1748
9181 Airport Road	1748
9184 Airport Road	1748
9189 Airport Road	1748
9191 Airport Road	1748
9192 Airport Road	1748
9197 Airport Road	1748
9202 Airport Road	1748
9205 Airport Road	1748
9210 Airport Road	1748
9213 Airport Road	1748
9220 Airport Road	1748
9221 Airport Road	1748
2910 Homestead Drive	1711
2950 Homestead Drive	1711
2958 Homestead Drive	1711
2965 Homestead Drive	1711
2966 Homestead Drive	1711
2975 Homestead Drive	1711
2976 Homestead Drive	1711
2982 Homestead Drive	1711
2983 Homestead Drive	1711
2990 Homestead Drive	1711
2995 Homestead Drive	1711
3000 Homestead Drive	1711
3002 Homestead Drive	1711
3003 Homestead Drive	1711
3011 Homestead Drive	1711 Appealed by Appellant No. 4
3012 Homestead Drive	1711 (1826210 Ontario Inc.).
3017 Homestead Drive	1711
3020 Homestead Drive	1711
3022, 3024 Homestead Drive	1710 and 1711

(Page 194 of 247)

Property Address	Map Number
3026 Homestead Drive	1710 and 1711
3034 Homestead Drive	1710 and 1711
3044 Homestead Drive	1710 and 1711
3054 Homestead Drive	1710 and 1711
3055 Homestead Drive	1749 and 1171
3063 Homestead Drive	1749
3091 Homestead Drive	1748 and 1949
3102 Homestead Drive	1748
3114, 3116 Homestead Drive	1748
3117 Homestead Drive	1748 and 1949
3124 Homestead Drive	1748
3127 Homestead Drive	1748 and 1949
3129 Homestead Drive	1748
3130 Homestead Drive	1748
3136 Homestead Drive	1748
3141 Homestead Drive	1748
3144 Homestead Drive	1748
3145 Homestead Drive	1748
3151 Homestead Drive	1748
3150 Homestead Drive	1748
3154 Homestead Drive	1748
3155 Homestead Drive	1748
3200 Homestead Drive	1748
3201 Homestead Drive	1748
3210 Homestead Drive	1748
3219 Homestead Drive	1748
3223 and 3231 Homestead Drive	1748
Part of 3234 Homestead Drive	1748
2910 Upper James Street	1711
2918 Upper James Street	1711

The following special provision shall apply:

- a) Notwithstanding Subsection 10.6.1 and in addition to Subsection 10.6.2, the following uses shall be prohibited:
 - i) Day Nursery
 - ii) Dwelling Unit(s)
 - iii) Multiple Dwelling
- 581. Within the lands zoned Neighbourhood Commercial (C2) Zone, Community Commercial (C3) Zone, Mixed Use Medium Density (C5) Zone and Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Maps 861, 862, 902 and 903 of Schedule "A" Zoning Maps and described as:

(Page 195 of 247)

Duran auto Antologia	Mary Niverland
Property Address	Map Number
41 Baldwin Street	903
45 Baldwin Street	903
47 Baldwin Street	903
4 Cootes Drive	903
10 Cootes Drive	903
16 Cootes Drive	903
32 Cootes Drive	903
33, 35 Cootes Drive	861 and 903
39 Cootes Drive	861 and 903
40 Cootes Drive	903
42 Cootes Drive	903
47 Cootes Drive	861
50 Cootes Drive	903 Appealed by Appellant No. 7 (Canadian 861 Tire Real Estate Limited (CTREL)).
51 Cootes Drive	7 Tire Real Estate Limited (CTREL)).
55 Cootes Drive	861
10 Court Street	861 and 903
11 Court Street	861 and 903
25 Court Street	903
27 Court Street	903
29 Court Street	903
81 Dundas Street	903
1 East Street North	861 and 862
7 Governors Road	903
10 Governors Road	903
2 Hatt Street	903
6 Hatt Street	903
122 Hatt Street	860 and 902
33 King Street East	861
49 King Street East	861
69 King Street East	861
72 King Street East	861
76 King Street East	861
78 King Street East	861
80 King Street East	861 and 903
82 King Street East	861
84 King Street East	861
86 King Street East	861
90 King Street East	861
92 King Street East	861
94 King Street East	861
96 King Street East	861
106 King Street East	861
108 King Street East	861
	861
110 King Street East	001

(Page 196 of 247)

Property Address	Map Number
124 King Street East	862
140 King Street East	862
RCP 14111 Pt Lot 8 RP 62R20092 Pt 1	862
1 Osler Drive	903
86, 90, 94 Main Street	903
Part of 68 South Street West	903
4 Thorpe Street	861
8 Thorpe Street	861
9 Thorpe Street	861
22 Thorpe Street	903
24 Thorpe Street	903
32 York Road	861
48 York Road	861
30 York Street	903

The following special provision shall apply:

- a) Notwithstanding Subsections 10.2.1, 10.3.1, 10.5.1 and 10.5a.1, and in addition to Subsections 10.2.2, 10.3.2, 10.5.2 and 10.5a.2, the following uses shall be prohibited:
 - i) Day Nursery
 - ii) Hospital
 - iii) Long Term Care Facility
 - iv) Residential Care Facility
 - v) Retirement Home
 - vi) Warehouse
- b) Notwithstanding Subsection 10.5.3 h), no Habitable Room within a Dwelling Unit(s) or Multiple Dwelling shall be permitted in a basement or cellar.
- c) Clause a) shall not apply on those lands zoned Community Commercial (C3) Zone and described as:

Property Address	Map Number
122 Hatt Street	860 and 902
7 Governor's Road	903
10 Governor's Road	903
86, 90, 94 Main Street	903

582. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 445, 481, 482, 516 and 517 of Schedule "A" – Zoning Maps and describes as:

(Page 197 of 247)

D (A)	NA NI I
Property Address	Map Number
Part of 50 Culotta Drive	516
221 Dundas Street East	516
229 Dundas Street East	516
233 Dundas Street East	516 and 517
241 Dundas Street East	516 and 517
Blk 14 of Plan 62 M 582	516 and 517
245 Dundas Street East	482 and 517
255 Dundas Street East	481 and 482
267 Dundas Street East	482
271 Dundas Street East	482
5 Hamilton Street North	482
9 Hamilton Street North	482
61 Hamilton Street North	481 and 482
71 Hamilton Street North	481 and 482
79 Hamilton Street North	481
81 Hamilton Street North	481
83 Hamilton Street North	481
87 Hamilton Street North	481
89 Hamilton Street North	481
95 Hamilton Street North	481
115 Hamilton Street North	481 and 445
145 Hamilton Street North	445
170 Rockhaven Lane	481

- a) In addition to Subsection 10.5.1, the following uses shall also be permitted:
 - i) Duplex
 - ii) Stacked townhouse
 - iii) Townhouse
 - iv) Triplex
- b) Notwithstanding Section 4.12 (f)(ii), for the lands located at 115 Hamilton Street North, expansions to buildings legally existing at the date of the passing of the by-law may be permitted provided the total expansion of the gross floor area of all the buildings on the site does not exceed 1,475 square metres.
- 583. Within the lands zoned District Commercial (C6) Zone, identified on Maps 444 and 445 of Schedule "A" Zoning Maps and described as the southeasterly portion of 619 Centre Road and 645 Wigood Drive, the following special provisions shall apply:
 - a) In addition to Subsection 10.6.1, the following use shall also be permitted:

(Page 198 of 247)

- i) Multiple Dwellings
- ii) Retirement Home
- b) Notwithstanding Subsection 10.6.1 and in addition to Subsection 10.6.2, the following uses shall also be prohibited:
 - i) Hotel
 - ii) Motor Vehicle Rental Establishment
 - iii) Motor Vehicle Service Station
 - iv) Motor Vehicle Washing Establishment
- c) Notwithstanding Subsection 10.6.1.1i)1.A. the following regulation shall apply:
 - A minimum of 1,858.0 square metres of Commercial gross floor area shall be provided within the extent of the lands subject to Special Exception No. 583.
- 584. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 414 of Schedule "A" Zoning Maps and described as Part of 485 Dundas Street East, the following special provisions shall apply:
 - a) In addition to Subsection 10.5.1 the following use shall also be permitted:
 - i) Live-Work Unit
 - b) In addition to Section 3: Definitions, for the purpose of Special Exception No. 584, the following definition shall apply:

Live-Work Unit

A street townhouse or townhouse dwelling that may contain residential uses and the following commercial uses on the ground floor:

Retail:

Personal Services;

Service Shop;

Office; and,

Dry Cleaning Distribution Station.

c) Notwithstanding the definition of Lot Line – Front in Section 3: Definitions, Sections 4.6 a), d), e), f), 5.6 c), 10.5.3 a), b), c), d), g) v), and j, the following regulations shall apply to the use identified in Clause a):

(Page 199 of 247)

i) Minimum Lot Area	165.0 square metres;
---------------------	----------------------

ii) Minimum Lot Frontage

6.0 metres;

iii Maximum Height 12.5 metres;

iv) Minimum Front Yard Setback 1.5 metres;

v) Minimum Rear Yard Setback 6.0 metres;

vi) Minimum Interior Yard Setback 1.2 metres, except for the side yard related to the common wall of the street townhouses, in which case a minimum side yard of 0.0 metres shall be provided.

vii) Minimum Exterior Yard Setback 2.5 metres;

viii) Planting Strip

Section 5.2 v) b) shall not apply.

ix) Yard Encroachments

Structure or Item	Yard Into Which Encroachment is Permitted	Maximum Encroachment Permitted Into Required Yard
Sills, beltcourses, cornices, fireplaces, chimney breasts, pilasters, eaves, or gutters	All	0.65 metres
Bay, Bow or Box Window with our without a foundation	Required front, required rear, and required exterior side yard	1.0 metres plus a further 0.3 metres for eaves

(Page 200 of 247)

Steps,	Required front,	Porches – 2.0
enclosed and	required rear,	metres;
unenclosed	and required	Steps – 0.6
porches	exterior side	metres from
	yard	the streetline
Setback of all	Required front,	0.3 metres
structures from	required rear,	minimum
a corner sight	and required	setback from
triangle on a	exterior side	the hypotenuse
common	yard	of a sight
element road		triangle

- x) Principal building entrances for Commercial uses shall face Spring Creek Drive which shall be deemed the front yard.
- x) Spring Creek Drive shall be deemed the front lot line.
- xii) Notwithstanding Section 5.6, any commercial uses at-grade shall be exempt from the applicable parking requirement.
- xiii) Commercial Uses permitted only within the at-grade portion of the unit except accessory storage may be permitted on floors below grade.
- 585. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 414 of Schedule "A" Zoning Maps and described as 493 Dundas Street East, the following special provisions shall apply:
 - a) Notwithstanding Subsections 10.5.1, only the following uses shall be permitted within the building existing as of August 14, 2015, and any additions and alterations to the building existing as of August 14, 2015:
 - i) Uses existing as of August 14, 2015, not in conjunction with any other permitted use
 - ii) Art Gallery, Museum or Public Use
 - iii) Custom Work Shop
 - iv) Financial Institution
 - v) Funeral Home
 - vi) Personal Services
 - vii) Office
 - viii) Retail
 - ix) Service Shop
 - b) Notwithstanding Subsection 5.1a)v)b), 5.2b)i), 5.2f), and 5.2i) the following regulations shall also apply:
 - i) Parking Space Access A minimum two-way access

(Page 201 of 247)

driveway width of 6.0 metres shall be provided except for a minimum two-way access driveway width of 5.0 metres which shall be provided to provide vehicular access to the westerly portion of the parking lot.

ii) Dimensions of Parking Spaces

All required surface parking spaces shall have minimum dimensions of 2.5 x 5.8 metres.

iii) Barrier Free Parking Space Size Dimension

A minimum barrier free parking space size dimension of 4.1 metres by 5.8 metres shall be provided.

- iv) Subsection 5.1a)v)b) shall not apply.
- c) In addition to Subsection 10.5.3g) vi), and notwithstanding Subsections 10.5.3a), b), g)ii), iii), iv), and vii), and i) the following regulations shall also apply:

i)	Maximum Yard	14.2 metres
·	Abutting a Street	

ii) Minimum Rear Yard Setback 1.0 metres

iii) Principal Entrance of the Building

A minimum of one principal entrance shall be provided on the west building façade of the building, and shall be accessible from the building façade with direct access from the public sidewalk.

iv) Rear Yard Planting Strip

A minimum of 1.0 metres planting strip shall be provided between the rear lot line and the garage.

v) Location of Parking Spaces

Parking spaces and driveway providing access to the parking spaces shall be permitted in the front yard located within 5.5 metres from the front lot line, and shall be

(Page 202 of 247)

permitted between the building and the west lot line.

- vi) Subsections 10.5.3g)ii) and iii) shall not apply
- 586. Within the lands zoned Arterial Commercial (C7) Zone, identified on Maps 1457, 1505, 1506 of Schedule "A" Zoning Maps and described as 3 Green Mountain Road and 333 Upper Centennial Parkway, the following special provisions shall apply:
 - a) In addition to Subsection 10.7.1, uses permitted under Subsection 10.6.1 shall also be permitted.
 - b) Notwithstanding Subsection 10.7.3 b), 10.7.4 c), the following shall apply for a Motor Vehicle Service Station and a Car Washing Establishment on a property located at 3 Green Mountain Road:
 - i) Minimum Rear Yard

1.5 metres

ii) Minimum Landscape Open Space A landscaped strip shall only be required adjacent to every portion of any lot line that abuts any street, except for points of ingress and egress, and be a minimum width of 3.2 metres.

iii) Width of Entrance and Exit Ramp

The width of an entrance or exit ramp shall be not more than 12.9 metres abutting Upper Centennial Parkway and 12.4 metres abutting Green Mountain Road West. The width of an entrance or exit ramp shall be not less than 9.0 metres along either street.

iii) Additional features of a Landscape Strip

A gateway feature shall be required within the Landscaped Strip at the corner of Green Mountain Road West and Upper Centennial Parkway which may include, but not be limited to, a decorative wall, signage, lighting and / or metal works.

587. Within the lands zoned Arterial Commercial (C7) Zone, identified on Maps 1505, 1456 of Schedule "A" – Zoning Maps and described as 272 First Road West, the following special provisions shall apply:

(Page 203 of 247)

- a) In addition to Subsection 10.7.1, the following uses shall also be permitted:
 - i) Uses permitted under Section 10.6.1
 - ii) Library
 - iii) Movie Theatres
- b) In addition to Clause a) above, the following regulations shall also apply:
 - i) Maximum Gross Floor 10,000 square metres.
 Area for Individual Commercial Uses
 - ii) Maximum Total Gross 2,000 square metres. Floor Area for Office
- 588. Within the lands zoned Arterial Commercial (C7) Zone, identified on Maps 1505 and 1552 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number	
Part of 219 Upper Centennial Parkway	1552, 1505	
225 Upper Centennial Parkway	1505	
Part of 237 Upper Centennial Parkway	1505 Appealed by Appellant No. 1	14 (Marz
249 Upper Centennial Parkway	1505 Homes Holdings Inc.).	

The following special provisions shall apply:

- a) In addition to Subsections 10.7.1, the following uses shall also be permitted:
 - i) Place of Worship
 - ii) Day Nursery
- b) In addition to Subsection 10.7.3 f), a 15 metres landscaped area shall be provided and maintained along the Upper Centennial Parkway lot line.
- 589. Within the lands zoned Mixed Use Medium Density (C5) Zone and Arterial Commercial (C7) Zone, identified on Maps 1548, 1549, 1593, 1594 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number
Portions of 1603 Rymal Road East	1548
Portions of 1645 Rymal Road East	1548
1655 Rymal Road East	1548

(Page 204 of 247)

Property Address	Map Number
1825 Rymal Road East	1548
1829 Rymal Road East	1548
Portions of 1831 Rymal Road East	1548
1835 Rymal Road East	1548
1837 Rymal Road East	1548
1841 Rymal Road East	1548
1843 Rymal Road East	1548
1845 Rymal Road East	1548
1847 Rymal Road East	1548
1865 Rymal Road East	1548, 1593
1869 Rymal Road East	1548, 1593
1873 Rymal Road East	1549, 1593, 1594
1877 Rymal Road East	1594
1883 Rymal Road East	1594
1885 Rymal Road East	1594
1889 Rymal Road East	1594
1893 Rymal Road East	1594
1897 Rymal Road East	1594
1899 Rymal Road East	1594
1901 Rymal Road East	1594
1907 Rymal Road East	1594
1911 Rymal Road East	1594
1925 Rymal Road East	1594
1933 Rymal Road East	1594
1937 Rymal Road East	1594
1941 Rymal Road East	1594

The following special provisions shall apply:

- a) In addition to Subsection 10.5.2 and notwithstanding Subsection 10.5.1, the follow use shall also be prohibited:
 - i) Hotel
- b) Notwithstanding Subsection 10.5.3 d), the maximum height shall be 14.0 metres.
- 590. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 909 and 951 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number
74 New Street	909
76 New Street	909
78 New Street	909
448 Main Street West	909

(Page 205 of 247)

Property Address	Map Number
450 Main Street West	909
451 Main Street West	909
452 Main Street West	909
453 Main Street West	909
455 Main Street West	909
457 Main Street West	909
459 Main Street West	909
460 Main Street West	909
461 Main Street West	909
463 Main Street West	909
465 Main Street West	909
454 Jackson Street West	909 and 951
456 Jackson Street West	909 and 951
25 Dundurn Street South	909
33 Dundurn Street South	909
35 Dundurn Street South	909
37 Dundurn Street South	909
39 Dundurn Street South	909
41 Dundurn Street South	909
47 Dundurn Street South	909
49 Dundurn Street South	909
51, 53 Dundurn Street South	909
57 Dundurn Street South	909
59 Dundurn Street South	909
61 Dundurn Street South	909
63 Dundurn Street South	909
67 Dundurn Street South	909
71 Dundurn Street South	909
75 Dundurn Street South	909
91 Dundurn Street South	909
93 Dundurn Street South	909
95 Dundurn Street South	909

- a) Notwithstanding Subsection 10.5.1 and in addition to Subsection 10.5.2, the following uses shall also be prohibited:
 - i) Motor Vehicle Gas Bar
 - ii) Motor Vehicle Washing Establishment
- 591. Within the lands zoned Arterial Commercial (C7) Zone, identified on Map 1046 of Schedule "A" Zoning Maps and described as Part of 221 Melvin Avenue, the following special provisions shall apply:
 - a) In addition to Subsection 10.7.1, parking lot serving the Multiple Dwelling located at 221 Melvin Avenue shall also be permitted.

(Page 206 of 247)

- 592. With the lands zoned Parking (U3) Zone, identified on Map 1124 of Schedule "A" Zoning Maps and described as 0 Old Dundas Road the following special provisions shall apply:
 - a) Notwithstanding Subsection 12.3.1, with an approximate frontage of 43 metres and depth of 72 metres, shall only be used for a parking area in conjunction with the commercial uses permitted on 548 Old Dundas Road.
- 593. Within the lands zoned Neighbourhood Commercial (C2) Zone, identified on Map 482 of Schedule "A" Zoning Maps and described as 272 Dundas Street East, the following special provisions shall apply:
 - a) Notwithstanding Subsection 10.2.3b), c), d) and j) and in addition to Section 5.1 v), the following regulations shall apply:

i)	Maximum Height	12.0 metres.
ii)	Minimum Lot Coverage	46%.
iii)	Minimum Rear Yard	0.0 metres shall be provided to the decorative archway which forms part of the principal building.
iv)	Minimum Interior Side Yard	0.0 metres shall be provided to a decorative archway which forms part
v)	Planting Strip Requirements abutting a Street	of the principal building. No Planting Strip shall be provided across all lot lines adjacent to a street.
vi)	Planting Strip Requirements abutting Rear and Interior Side Lot Lines	No Planting Strip shall be provided along the rear and interior side lot line.
vii)	Parking Area Location	The parking area shall be 0.0 metres from the boundary of a residential zone.
viii)	Underground Parking Area	The underground parking area shall be 0.0 metres from any lot line.

(Page 207 of 247)

- 594. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 860 and 902 of Schedule "A" Zoning Maps and described as 65 Hatt Street, the following special provisions shall apply:
 - a) In addition to Subsection 10.5.1, the following use shall also be permitted and only within the building existing as of August 16, 2013:
 - a) Craft Brewery
 - b) In addition to Section 3: Definitions, for the purpose of Special Exception No. 594, the following definition shall apply:

Craft Brewery

A facility at which malt beverages fermented on the premises are packaged and sold for distribution, retail, or wholesale. The facility may include retail sales, tours, and a hospitality and tasting area, but shall not include a restaurant, tavern, bar, night club, or take-out food service.

c) The following regulation shall apply to the use identified in Clause a) above:

Maximum Gross Floor Area

The maximum gross floor area devoted to the retail and tasting component of the Craft Brewery shall not exceed 450.0 square metres.

- 595. Within the lands zoned District Commercial (C6) Zone, identified on Map 1711 of Schedule "A" Zoning Maps and described as 3017 Homestead Drive, the following special provision shall apply:
 - a) In addition to Subsections 10.6.1, and notwithstanding Subsection 10.6.2, the following uses shall also be permitted:
 - i) Garden Centre
 - ii) A Single Detached Dwelling on the same lot existing on the date of the passing of this By-law
 - b) In addition to Subsection 10.6.2 and notwithstanding Subsection 10.6.1, the following uses shall be prohibited:
 - i) Boat and/or motorized snow vehicle sales establishments
 - ii) Cold storage locker establishments
 - iii) Dairies
 - iv) Farm equipment sales establishments

(Page 208 of 247)

- v) Recreational vehicle sales establishments
- vi) Taxi Establishment
- vii) Motor Vehicle Service Station
- c) Notwithstanding Subsection 10.6.3 c), a minimum southerly side yard of 2.3 metres shall be provided and maintained.
- d) In addition to Subsections 10.6.1, the single detached dwelling existing on the date of the passing of this By-law, and buildings and structures accessory thereto shall be permitted as an ancillary residential use to the garden centre.
- 596. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 1935 of Schedule "A" Zoning Maps and described as 2605 Binbrook Road East, the following special provision shall apply:
 - a) Notwithstanding Subsections 10.5a.1, permitted uses shall be limited to the following:
 - i) Financial Establishment
 - ii) Retail
 - iii) Commercial School
 - iv) Day Nursery
 - v) Personal Service
 - vi) Funeral Home
 - vii) Hotel
 - viii) Office
 - ix) Studio
 - x) Commercial Entertainment
 - xi) Place of Assembly
 - xii) Restaurant
 - xiii) Veterinary Service
 - xiv) Dwelling Unit
 - b) Dwelling units are permitted above any use permitted on the ground floor. Dwelling units are permitted on the ground floor (but not in a basement or cellar) but shall not be located on the portion of the ground floor facing Binbrook Road East or Southbrook Drive.
 - c) Notwithstanding Subsections 10.5a.3 a), c) and d), the following regulations shall also apply to the uses identified in Clause a):
 - i) Minimum Front Yard 0.0 metres
 - ii) Minimum Side Yard 0.0 metre except 7.5 metres abutting a side lot line which is the boundary of any Residential or Institutional Zone.

(Page 209 of 247)

iii) Maximum Height

10.7 metres but a maximum height of 14.1 metres is permitted to the top of an ornamental dome or other such architectural feature.

- d) In addition to Subsection 5.1 a) v), no parking space or part thereof shall be located and no land shall be used for the temporary parking or storage of any motor vehicle within 1.5 m of the boundary of any Residential Zone or within 1.25 m of any Institutional Zone.
- e) Notwithstanding Subsections 10.5a.3 i) and j), a landscaped area in the form of a planting strip having a minimum width of 1.5 m and a fence having a minimum height of 1.8 m shall be provided and thereafter maintained adjacent to every portion of any lot line that abuts a Residential Zone. A landscaped area having a minimum width of 1.25 m shall be provided and thereafter maintained adjacent to every portion of any lot line that abuts an Institutional Zone. A transformer shall be permitted within the planting strips.
- f) In addition to Subsection 5.1a) v) c), a transformer is permitted within the 3.0 metre planting strip that abuts the street line.
- g) Notwithstanding Subsections 5.2 f), each barrier-free parking space shall have a minimum width of 4.4 metres and a minimum length of 5.5 metres, except where two (2) barrier-free parking spaces are located together, a minimum width of 3.5 metres for each space shall be permitted.
- h) In addition to Subsection 5.1 a) v), where a parking area which is required to provide for more than four (4) vehicles abuts any Residential Zone, a landscaped area consisting of a permanently maintained planting strip with a minimum width of 1.5 m shall be provided and shall also include fencing to provide a solid and effective screen. Where a parking area which is required to provide for more than four (4) vehicles abuts any Institutional Zone, a landscaped area with a minimum width of 1.25 m shall be provided.
- i) Notwithstanding Subsection 5.6 c), parking spaces shall be provided at a rate of 1.25 spaces per residential dwelling unit, and 1 space per every 34.0 square metres of gross floor area for all other permitted uses, and visitor parking for the residential uses is permitted to be shared with parking for other permitted uses.
- j) Notwithstanding Subsection 5.2 b), each parking space shall have a minimum width of 2.6 metres and a minimum length of 5.5 metres.

(Page 210 of 247)

- 597. Within the lands zoned Arterial Commercial (C7) Zone, identified on Maps 1434 and 1483 of Schedule "A" Zoning Maps and described as 1172 Wilson Street West, the following special provision shall apply:
 - a) In addition to Subsection 10.7.1, the following uses shall also be permitted within the existing building:
 - i) Retail
 - ii) Personal Service
 - iii) Restaurant
 - iv) Commercial School
 - v) Medical Clinic
 - vi) Office
 - vii) Financial Establishment
- 598. Within the lands zoned Community Commercial (C3) Zone, identified on Maps 1548 and 1593 of Schedule "A" Zoning Maps and described as 21 and 31 Trinity Church Road and 1816 Rymal Road East, the following special provisions shall apply:
 - a) Notwithstanding Subsection 10.3.1 and in addition to Subsection 10.3.1 10.3.2, the following use shall also be prohibited:
 - i) Motor Vehicle Service Station
 - b) In addition to Subsection 10.3.1 and notwithstanding Subsection 10.3.2, the following use shall also be permitted:
 - iii) Drive-Through Restaurant accessory to a Motor Vehicle Gas Bar
 - c) Notwithstanding the definition of Motor Vehicle Gas Bar, Medical Clinic, and Office in Section 3: Definitions, for the purpose of Special Exception No. 598, the following definitions shall apply:

Motor Vehicle Gas A place with one or more pump islands consisting of one or more fuel pumps for the sale of fuel, liquids and small accessories essential for the operation of motor vehicles, and may include a shelter and a Motor Vehicle Washing Establishment accessory to a Motor Vehicle Gas Bar, but does not include motor vehicle repairs, oil changes or greasing.

Medical Clinic A building or part thereof used by qualified medical practitioner(s), dentist(s),

(Page 211 of 247)

chiropractor(s), physiotherapist(s), osteopath(s) or other drugless practitioner(s), for public or private medical, surgical physiotherapeutic or other human health purposes, except when included within or accessory to

a private or public hospital.

Office Any office where professionally qualified

persons, technical assistants and clerical staff are employed and where clients receive advise, but does not include a medical clinic

or personal service shop.

d) Notwithstanding Subsections 5.1a) v), 5.6 c), 10.3.3 a), b), c), g) and j), the following regulations shall apply:

> i) Maximum Gross Leasable Floor Area of Any Individual Commercial Establishment:

Not more than half of the total leasable floor area provided on the site.

ii) Maximum Gross Leasable Floor Area of any Group of Local Commercial Uses:

2,500 square metres

iii) Maximum Gross Leasable Floor Area of any Group of Medical Clinic Uses:

210 square metres

Minimum Front Yard: iv)

1.3 metres

V) Minimum Easterly Side Yard:

4.5 metres

vi) Minimum Westerly

Side Yard:

3.7 metres (except for a Motor Vehicle Gas Bar and accessory uses to a Motor Vehicle Gas Bar, a Minimum Westerly Side Yard of 25

metres is required)

vii) Minimum Rear Yard: 1.5 metres

viii) Minimum Number of Parking Spaces:

A minimum of one parking space for every 25.5 square metres of gross

floor area.

(Page 212 of 247)

- ix) Parking Space Requirements:
- 1. A drive-through lane shall have a minimum width of 4 metres.
- The access driveway located between the canopy of a Motor Vehicle Gas Bar and a Drive-Through lane shall have a minimum width of 4.2 metres.
- 3. A landscaped area along Rymal Road East with a minimum average width of 2 metres but not less than 1.3 metres shall be provided and thereafter maintained along the street line, and it shall be continuous except for driveways required for access to such parking area.
- 4. A landscaped area along Trinity Church Road with a minimum width of 3 metres shall be provided and thereafter maintained along the street line, and it shall be continuous except for driveways required for access to such parking area.
- x) Minimum Landscaping Requirements:

A landscape area in the form of a planting strip having a minimum width of 4.5 metres and a fence having a minimum height of 1.8 metres shall be provided and thereafter maintained adjacent to every portion of any lot line that abuts a Residential Zone or any Zone where the adjoining land is used for residential purposes.

- e) Notwithstanding Subsection 5.2b) and 5.2f), the following regulations shall also apply:
 - i) Parking Space Size Dimension

A minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided.

(Page 213 of 247)

- ii) Barrier Free Parking A minimum barrier free parking Space Size Dimension space size dimension of 4.4 metres by 5.5 metres shall be provided.
- 599. Within the lands zoned Arterial Commercial (C7) Zone, identified on Map 1547 of Schedule "A" Zoning Map and described as Part of 212 Glover Road and 0 Rymal Road, the following special provisions shall apply:
 - a) In addition to Subsection 10.7.1, the following uses shall also be permitted:
 - i) Banks, Financial Institutions, and Personal Service
 - ii) Food Stores
 - iii) Hardware Stores, Beer Store, LCBO Stores, and Drug Store
 - iv) Offices
 - v) Retail Stores
 - vi) Stores primarily selling apparel, housewares, electronics, sporting goods, or general merchandise
 - b) The maximum total combined gross floor area for uses identified in Subsection retail, food store, and stores primarily selling apparel, housewares, electronics, sporting goods, or general merchandise shall be 10,000 square metres.
 - c) The total maximum gross floor area for office shall be 2,000 square metres.
 - d) Maximum gross floor area for all other uses shall not apply.
- 600. Within the lands zoned Arterial Commercial (C7) Zone, identified on Map 1499 of Schedule "A" Zoning Map and described as 1575 Upper Ottawa Street, the following special provisions shall apply:
 - a) In addition to Subsection 10.7.1, the following uses shall also be permitted:
 - i) Retail
 - ii) Personal Services
 - iii) Financial Establishment
 - b) In addition to Subsection 10.7.3, the following regulation shall apply:
 - ix) Combined 1,767 square metres for each lot.

 Maximum Gross
 Floor Area for
 Office

(Page 214 of 247)

x) Combined 1,500 square metres for each lot."

Maximum Gross
Floor Area for
Retail

601. Within the lands zoned District Commercial (C6) Zone, identified on Maps 1413 and 1483 of Schedule "A" – Zoning Maps, and described as:

Property Address	Map Number
111, 115 Portia Drive & 1175, 1179	1434 and 1483
Wilson Street West	
117, 123, 129 Portia Drive & 1183, 1187,	1434
1191 Wilson Street West	

The following special provisions shall apply:

a) In addition to the definition of Retail in Section 3: Definitions, the following definition shall also apply:

Supermarket: A store in which various kinds of food and non-food items are offered or kept for sale, including fresh meats and fresh produce, provided that the area devoted to food items is predominant, and the non-food items may include but are not limited to flowers, hardware, patent medicines, toiletries, household supplies, garden supplies, wine, photofinishing, magazines and videos.

- i) In addition to the definition of Lot in Section 3: Definitions, the lands described as 111, 115, 117, 123, 129 Portia Drive and 1143, 1175, 1179, 1183, 1187, 1191 Wilson Street West shall be considered one lot for zoning purposes.
- b) In addition to Subsection 10.6.1, the following uses shall also be permitted:
 - i) Art Gallery
 - ii) Auctioneer Establishments
 - iii) Building and Lumber Supply Establishment, within a wholly enclosed building
 - iv) Cold Storage Locker Establishment
 - v) Commercial Entertainment, within a wholly enclosed building
 - vi) Commercial Parking Facility
 - vii) Commercial Recreation, within a wholly enclosed building
 - viii) Community Garden
 - ix) Craftsperson Shop
 - x) Day Nursery

(Page 215 of 247)

- xi) Educational Establishment xii) Financial Establishment
- xiii) Funeral Home
- xiv) Laboratory
- xv) Library
- xvi) Major Recreational Equipment Sales and Service Establishment
- xvii) Manufacturing, limited to a Printing and / or Publishing Establishment
- xviii) Medical Clinic
- xix) Museum
- xx) Office
- xxi) Personal Service
- xxii) Post Office
- xxiii) Private Club or Lodge
- xxiv) Repair Service
- xxv) Restaurant
- xxvi) Retail
- xxvii) Supermarket
- xxviii) Transportation Depot
- xxix) Urban Farm
- xxx) Urban Farmer's Market
- c) In addition to Subsection 10.6.2, the following uses shall also be prohibited:
 - i) Body Rub Parlour
 - ii) Department Store
 - iii) Dwelling Unit
 - iv) Open Storage
- d) Notwithstanding Subsections 5.6 c), 10.6.3 a), b), c), f), g), and in addition to Subsection 10.6.3 h), the following regulations apply:
 - i) Minimum Front 1.5 metres, except as provided in Clause Yard: viii) below
 - ii) Minimum Side
 Yard:

 1.5 metres, except where an interior side
 yard abuts a private vehicular turnaround,
 a 0.0 metre side yard shall be permitted
 - iii) Minimum Rear 10.0 metres Yard:
 - iv) Minimum Frontage: 30.0 metres
 - v) Maximum Total 4,975 square metres Aggregate Gross

(Page 216 of 247)

Floor Area for all uses not including a Supermarket:

vi) Maximum Gross Floor Area for a Supermarket: 4,725 square metres

vii) Built Form for New Development:

Within 20 metres of the Wilson Street West Lot Line, the minimum façade shall be greater than or equal to 40% of the measurement of the Wilson Street Lot Line, excluding access driveways to Wilson Street West and enhanced bioswale areas, and shall be subject to the following:

- A) A maximum building setback of 6.0 metres is permitted
- B) A minimum of 40% of the area of the ground floor façade facing Wilson Street West shall be composed of windows and doors, except that 80 metres of façade facing the Wilson Street West frontage shall be exempt from this requirement
- C) No parking, driveways, drive through lanes, stacking lanes, or aisles shall be located between the building façade facing Wilson Street West and Wilson Street West
- viii) Minimum Planting Strip:

3.0 metres adjacent to each lot line which abuts a public street or lot containing a dwelling comprising one or two dwelling units (but shall permit the location of principal buildings, walkways / sidewalks, retaining walls, curbs, signs, and light standards within required Planting Strips).

ix) Minimum Parking Requirement:

Parking for all uses shall be provided at a rate of 3.5 spaces for each 93 square metres of Gross Floor Area, or part thereof.

(Page 217 of 247)

602. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 1126, 1127, 1177, 1178, 1179, 1462, 1463, 1501, 1502 of Schedule "A" - Zoning Maps and described as:

Property Address	Map Number
122 Martindale Crescent	1127, 1179
1775 Stone Church Road East	1452, 1453, 1501, 1502

The following special provisions shall apply:

- Notwithstanding Subsection 10.5.3 k), the display of goods or materials for retail purposes accessory to a Retail use shall be permitted on any yard;
- b) Notwithstanding Clause a), an Outdoor Storage area shall not be located on a planting strip, or required parking or loading area; and,
- c) Notwithstanding Subsection 10.5.3 k), an Outdoor Storage area shall be located 6.0 metres from a Residential or Institutional Zone or lot containing a residential use, or a lot line fronting onto a street, and shall be screened or fenced from view.
- d) Notwithstanding Subsection 10.5.3 k), an Outdoor Storage area attached to a building shall not exceed 500 square metres, or an area equivalent to 5% of the floor area, whichever is lesser.
- 603. Within the lands zoned Neighbourhood Commercial (C2) Zone, identified on Map 1187 of Schedule "A" Zoning Map and described as 726 Upper Gage Avenue, the following special provisions shall apply:
 - a) Notwithstanding Subsection 5.6 c), for a Medical Clinic, 1 parking space shall be provided for every 22.0 square metres.
 - b) Notwithstanding Subsection 5.2b) and 5.2f), the following regulations shall also apply:
 - i) Parking Space Size A minimum parking space size Dimension dimension of 2.6 metres by 5.5 metres shall be provided.
 - ii) Barrier Free Parking A minimum barrier free parking Space Size Dimension space size dimension of 4.4 metres by 5.5 metres shall be provided.

(Page 218 of 247)

- 604. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Map 1548 and 1593 of Schedule "A" Zoning Map and described as Part of 1831 Rymal Road East, the following special provisions shall apply:
 - a) Notwithstanding Subsection 10.5.1 and in addition to Subsection 10.5.2, the following uses shall be prohibited, even as an accessory use:
 - i) Drive-Through Facilities
 - ii) Motor Vehicle Gas Bar
 - iii) Motor Vehicle Washing Establishments
 - iv) Motor Vehicle Dealerships
 - v) Garden Centres
 - vi) Hospitals
 - vii) Hotels
 - b) Notwithstanding Subsection 10.5.1 and in addition to Subsection 10.5.2, the following uses shall be prohibited as a primary use:
 - i) Motor Vehicle Service Stations
 - ii) Garden Centres
 - c) In addition to Subsection 10.5.1, the following uses shall also be permitted:
 - i) Masionettes
 - ii) Townhouses
 - d) Notwithstanding Subsection 10.5.3 d) ii) and iii), the maximum building height shall be 16.5 metres, or 4 storeys.
 - e) Notwithstanding the definition of Lot Line Front Lot Line in Section 3: Definitions, and in addition to Section 3: Definitions, for the purpose of Special Exception No. 604, the following definitions shall apply:

Dwelling – Means back to back townhouse dwellings,

Masionette: containing not more than sixteen maisonette

dwelling units within a block intended for

maisonette dwellings.

Dwelling – Means a building containing not less than

Townhouse: three and not more than nine dwelling units with each unit separated by a common or party wall or walls, with a separate outside

entrance to each unit.

(Page 219 of 247)

Line: Plan of "Part of Lot 33 – Concession 8", 25T-

201401, shall be deemed to be the front lot

line.

"Highway" or "Street" For the purpose of this Zone, the private

driveway(s) or condominium road(s) are deemed to be a street(s), and parking, landscaping and amenity areas are permitted

within the street(s).

- f) Notwithstanding the definition of Lot within Section 3: Definitions, those lands used for Maisonettes and Townhouses shall be considered as one lot.
- g) In addition to Subsections 4.6 b), d), f), 5.6 c), f), 10.5.3 a), b), c), d) and h), the following regulations shall only apply to Maisonettes and Townhouses:
 - i) Minimum Front Yard 0.6 metres
 - ii) Minimum Side Yard 6.0 metres for any side yard including a flankage yard
 - iii) Minimum Rear Yard 6.0 metres; except for an end wall abutting a street, a minimum 2.4 metres shall be provided and maintained.
 - iv) Minimum Distance Between Buildings on the Same Lot
- A) 12 metres between front walls;
- B) 2.4 metres between end walls of a block townhouse and / or a block of maisonette units;
- C) 12 metres between rear walls of a block of townhouses and / or a block of maisonette units
- D) 7.0 metres between end walls and rear walls of a block of townhouse and / or a block of maisonette units
- E) Separation distance shall not be applied to individual townhouse or maisonette units and / or their future property boundaries created by way of an application to remove part lot

(Page 220 of 247)

control and / or established by a condominium corporation.

v) Density

A minimum density of 55 units per net residential hectare and a maximum density of 75 units per net residential hectare shall apply.

vi) Maximum Building Height 13.5 metres or 3 storeys.

vii) Maximum Lot Coverage Not applicable

viii) Privacy Area per Unit Notwithstanding the yard requirements in Clause i), ii), and iii), each townhouse unit shall have at least one area which serves as a privacy area which shall be adjacent to the dwelling unit and shall have a minimum depth of 3.5 metres. No privacy area shall be required for maisonette units.

ix) Minimum Landscape Open Space

20%, except that landscape strips shall not be required between privacy areas and any lot line, nor adjacent to any portion of any lot that abuts a street.

x) Parking Requirement

2 parking spaces for each maisonette and townhouse dwelling unit, and 0.25 visitors spaces shall be provided within the condominium road(s). Tandem parking is permitted for non-visitors parking spaces.

xi) Parking Setback

No parking areas may be located closer than 2.75 metres from a dwelling unit on the same lot. Future property and / or unit boundaries created through a Condominium Act or Planning Act application shall not be subject to this requirement.

- xii) Barrier-free Parking Space Dimensions
- 4.4 metres x 5.5 metres
- xiii) Yard Encroachment A) Stairs may project into any

(Page 221 of 247)

required front yard a distance of not more than 3.5 metres;

- B) Bay windows, with or without foundations, may project into any required front, rear and / or flankage yard a distance of not more than 0.9 metres; and,
- C) Covered porches may project into any require front yard a distance of not more than 3.0 metres, and 1.8 metres for a flankage yard."
- 605. Within the lands zoned Arterial Commercial (C7) Zone, identified on Maps 1500, 1546, 1547 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number
1308 and 1318 Rymal Road East	Map 1546, 1547
1315 Rymal Road East	Map 1500
1324 Rymal Road East	Map 1547
1333 Rymal Road East	Map 1500, 1547
1360 Rymal Road East	Map 1547
1361 Rymal Road East	Map 1547
1368 Rymal Road East	Map 1547
1380 Rymal Road East	Map 1547
1384 Rymal Road East	Map 1547
1400 Rymal Road East	Map 1547
1411 Rymal Road East	Map 1500, 1547
145 Dartnall Road	Map 1500, 1547
172 Dartnall Road	Map 1547
173 Dartnall Road	Map 1547

The following special provisions shall apply:

- a) In addition to Subsection 10.7.1, the following uses shall also be permitted:
 - i) Adult Entertainment Parlours
 - ii) Body Rub Parlours

(Page 222 of 247)

- 606. Within the lands zoned District Commercial (C6) Zone, identified on Map 1450 of Schedule "A" Zoning Maps, and described as 1070 Stone Church Road East, the following special provisions shall apply:
 - a) Notwithstanding the definition of Front Lot Line in Section 3: Definitions of this By-law, the definition of the Front Lot Line shall mean any lot line of the lot abutting Stone Church Road East.
 - b) Notwithstanding Section 4.20c)i) and ii), an outdoor patio shall be permitted on the lot where any lot line abuts a Residential Zone, but shall not be permitted on portions of land between Tunbridge Crescent and a building.
 - c) Notwithstanding Sections 5.1v) and 10.6.4c), parking spaces and aisles giving direct access to the abutting parking space, shall not be located within 1.5 metres of a street line or Residential Zone or Institutional Zone except for points for ingress and egress, and a 1.5 metres planting strip being required and permanently maintained between the street line and the said parking spaces or aisles.
- 607. Within the lands zoned Arterial Commercial (C7) Zone, identified on Map 1499 of Schedule "A" Zoning Maps, and described as 1112 Rymal Road East, the following special provision shall apply:
 - a) Notwithstanding Subsection 10.7.1, the following uses shall be permitted within the building existing on the date of the passing of the By-law:
 - i) Medical Clinic
 - ii) Office
- 646. Within the lands zoned District Commercial (C6) Zone, identified on Maps 1911 and 1912 of Schedule "A" Zoning Maps, and described as 2400 Regional Road 56, the following special provisions shall apply:
 - a) Notwithstanding Section 4.8.1a, an accessory building existing at the time of the passing of the By-law shall be permitted.
 - b) Notwithstanding Subsection 10.6.3a), the Maximum Setback Fronting onto a Street Line shall be 28.0 metres.
 - c) Subsection 10.6.3g)iv) shall not apply.
- 647. Within the lands zoned Mixed Use High Density (C4) Zone, identified on Maps 957, 958, 999, and 1000 of Schedule "A" Zoning Maps and described as:

(Page 223 of 247)

Property Address	Map Number
1091 Barton Street East	999
1111, 1115 Barton Street East	957, 999
1145, 1147, 1149, 1183, 1187, 1191,	957, 958, 999, 1000
1211, 1219, 1223, 1231, 1241, 1249,	
1259, 1263 Barton Street East	
1255, 1273, 1275, 1283, 1299, 1311,	958, 1000
1317, 1321 Barton Street East	

The following special regulations shall apply:

- a) In addition to Subsection 10.4.1, following uses shall also be permitted:
 - i) Motor Vehicle Showroom
- b) In addition to Section 3: Definitions, for the purpose of Special Exception No. 647, the following definition shall apply:

Motor	Vehicle	Shall mean an establishment located internal to a		
Show Room buil		building where new motor vehicles are displayed		
		for the purpose of sale or leasing, and may		
		include accessory retailing of souvenir		
		merchandise, and shall not include the storage of		
		motor vehicles and Motor Vehicle Service Station.		

- c) A minimum building height of 6.0 metres shall be provided for commercial buildings containing only one or more of the following uses:
 - i) Financial Establishment
 - ii) Personal Service
 - iii) Restaurant
 - iv) Retail
- d) Where a building(s) on a lot exists on the date of the passing of the By-law, and have frontage on Barton Street East and/or Kenilworth Avenue North, Subsection 10.4.3a)i) shall not apply to any additional buildings.
- 648. Within the lands zoned Arterial Commercial (C7) Zone, identified on Map 1546 and 1547 of Schedule "A" Zoning Maps and described as 1324 Rymal Road East and 172 Dartnall Road, the following special provisions shall apply:

Notwithstanding Subsections 5.1v), 10.7.3a), and f), the following special regulations shall also apply:

(Page 224 of 247)

i)	Maximum Yard
	Abutting a Street
	(Northerly Lot Line)

3.0 metres within 30.0 metres of the intersection of the northerly and easterly lot lines.

- ii) Maximum Yard
 Abutting a Street
 (Easterly Lot Line)
- 3.0 metres except a maximum setback of 6.0 metres shall be provided and maintained within 30.0 metres of the intersection of the northerly and easterly lot lines.
- iii) Landscaped Area along Rymal Road East and Dartnall Road

3.0 metres in depth and abutting the street line shall be provided and maintained.

iv) Planting Strip Requirements A Planting Strip of not less than 1.5 metres in width shall be provided and maintained along every rear and side lot lines not abutting a street.

v) Minimum Building Façade Requirement

A minimum width of the building façade shall be equal to 45% of the measurement of the northerly lot line and within 50 metres of the Dartnall lot line.

vi) Window Requirements

All buildings shall have windows with a maximum sill height of 1.0 metres and a minimum height from finished floor to top of window of 2.4 metres for a minimum of 25% of the length of the façade facing the street.

vii) Locational
Requirement
of a Parking space

No parking space or part thereof shall be located, and no land shall be used for the temporary parking or storage of any motor vehicle at a distance of not less than 6.0 metres

(Page 225 of 247)

from a street line or closer than 1.5 metres from the lot lines not abutting the street.

649. Within the lands zoned District Commercial (C6) Zone, identified on Maps 1433 and 1482 of Schedule "A" – Zoning Maps and described as the northwest corner of Wilson Street West and Mason Drive, the following special provisions shall apply:

Appealed by Appellant No. 15 (Ministry of Municipal Affairs and Housing).

a) In addition to the definition of Retail in Section 3: Definitions, the following definition shall also apply:

Supermarket

A store in which various kinds of food and non-food items are offered or kept for sale, including fresh meats and fresh produce, provided that the area devoted to food items is predominant, and the non-food items may include but are not limited to flowers, hardware, patent medicines, toiletries, household supplies, garden supplies, wine, photofinishing, magazines and videos.

- b) Notwithstanding Subsection 10.6.1, only the following uses shall be permitted:
 - i) Art Gallery
 - ii) Auctioneer Establishment
 - (Building and Lumber Supply Establishment, within a wholly enclosed building)
 - iv) Catering Service
 - v) Cold Storage Locker Establishment
 - (vi) Commercial Entertainment, within a wholly enclosed building
 - vii) Commercial Parking Facility
 - viii) Commercial Recreation, within a wholly enclosed building
 - (ix) Community Garden
 - x) Craftsperson Shop
 - xi) Day Nursery
 - xii) Educational Establishment
 - xiii) Financial Establishment
 - xiv) Funeral Home
 - xv) Laboratory
 - xvi) Library
 - xvii) Major Recreation Vehicle Sales and Service Establishment
 - xxiii) Manufacturing, limited to a Printing and / or Publishing Establishment

(Page 226 of 247)

- xix) Medical Clinic
- (xx) Motor Vehicle Sales and Service Establishment
- xxi) Museum
- xxii) Office
- xxiii) Personal Services
- xxiv) Post Office
- xxv) Private Club or Lodge
- xxvi) Recreational Vehicle Sales and Service Establishment
- xxvii) Repair Service
- xxviii) Restaurant
- xxix) Retail, not including a Supermarket
- xxx) Transportation Depot
- xxxi) Urban Farm
- xxxii) Urban Farmer's Market
- c) Notwithstanding Subsection 10.6.1.1 i) 1. B., a two-storey building containing office uses on both the first and second floor is also permitted.
- d) In addition to Subsection 10.6.2, the following uses shall also be prohibited, even as an accessory use:
 - i) Body Rub Parlour
 - ii) Department Store
 - iii) Dwelling Unit
 - iv) Open Storage
 - v) Supermarket
- e) Notwithstanding Subsection 10.6.3e) and f), the maximum Gross Floor Area for all uses shall be 10,000 square metres, and shall not apply to Motor Vehicle Sales and Service Establishment and Major Recreational Vehicle Sales, Service, and Rental Establishment.
- 650. Within the lands zoned Arterial Commercial (C7) Zone, identified on Maps 1433, 1434, 1482 and 1483 of Schedule "A" Zoning Maps, and described as:

Property Address	Map Number
Lands located at the northwest corner of Portia Drive and Mason	1433 Appealed by Appellant No. 15 (Ministry of Municipal Affairs and Housing).
Drive	C ,
Lands located at the northeast corner of Portia Drive and Mason Drive	1433 & 1434
100 Portia Drive	1434
30 Mason Drive	1433, 1434, 1482 & 1483

(Page 227 of 247)

1147 Garner Road West	1434 & 1483
1151 Garner Road West	1434 & 1483
374 Shaver Road	1383
1019 Wilson Street West	1434 & 1383
1025 Wilson Street West	1434
1059 Wilson Street West	1434
1075 Wilson Street West	1434
1089 Wilson Street West	1434
1097 Wilson Street West	1434
1154 Wilson Street West	1434
1160 Wilson Street West	1434 & 1483
1172 Wilson Street West	1434 & 1483
1180, 1184, 1198 and 1206	1434 & 1483
Wilson Street West	

The following special regulations shall apply:

- a) In addition to Subsection 10.7.1, following uses shall also be permitted:
 - i) Financial Establishment
- 651. Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 1175 of Schedule "A" Zoning Maps and described as 392 Wilson Street East, the following special regulation shall apply:
 - a) Notwithstanding Subsection 10.5a.3 b), the minimum rear yard shall be 3.0 metres.
- 652. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 1748, 1749, and 1785 of Schedule "A" Zoning Maps and described as:

Property Address	Map Number
3311 Homestead Drive (part of	1748 & 1749
lands)	
3239 Homestead Drive	1748 & 1785
3249 Homestead Drive	1748
3253 Homestead Drive	1748
3263 Homestead Drive	1748
3269 Homestead Drive	1748
3275 Homestead Drive	1748
3260 Homestead Drive	1748
3266 Homestead Drive	1748
3272 Homestead Drive	1748
3287 Homestead Drive	1785
3307 Homestead Drive	1785

(Page 228 of 247)

Property Address	Map Number
3311 Homestead Drive	1748, 1749 and 1785
3313 Homestead Drive	1785
3323 Homestead Drive	1785
3325 Homestead Drive	1785
3329 Homestead Drive	1785
3331 Homestead Drive	1785
3300 Homestead Drive	1785

The following special provisions shall apply:

- a) In addition to Subsection 10.5a.1, the following additional uses shall be permitted:
 - i) Street townhouse Dwellings
 - ii) Single Detached and Duplex Dwellings existing at the date of the passing of the by-law (November 8, 2017)
- b) Notwithstanding Subsection 10.5a.3 a), 10.5a.3 b), 10.5a.3 d), and in addition to Subsection 10.5a.3, the following special regulations shall apply:

i)	Minimum building setback from a street line	9.0 metres
ii)	Minimum Rear Yard	10.7 metres
iii)	Maximum Building Height	10.7 metres
iv)	Lot coverage	25%.

- 653. Within the lands zoned Mixed Use Medium Density (C5) Zone, identified on Maps 1239 and 1292 of Schedule "A" Zoning Maps and described as 970 Upper Wentworth Street, the following special provisions shall apply:
 - a) For the building located at the south-west corner of Upper Wentworth Street and King Fisher Drive, the following special regulations shall apply:
 - i) Notwithstanding Subsection 4.25 c) ii), the stacking lane for the drive through facility may be located within 16.5 metres of King Fisher Drive.

(Page 229 of 247)

- ii) Notwithstanding Subsection 5.2 b) i), the minimum parking space size dimension of 2.7 metres by 6.0 metres shall be provided and maintained.
- iii) Subsection 5.2.1 a) shall not apply.
- iv) Notwithstanding Subsection 10.5.3 a) ii), the maximum setback from the street line shall be:
 - 1) 16.3 metres from Upper Wentworth Street; and,
 - 2) 13 metres from King Fisher Drive.
- b) Notwithstanding Subsection 5.6 c), 338 parking spaces shall be provided and maintained for the entire site.
- 654. Within the lands zoned Community Commercial (C3) Zone, identified on Map 1443 of Schedule "A" Zoning Maps and described as 2000 Garth Street, the following special provisions shall apply:
 - a) Notwithstanding Subsections 5.2 b) i), 5.2 f), 5.2 h) i), 5.2 h) ii), 10.3.3 a), 10.3.3 i) ii), 10.3.3 i) ii), the following regulations shall apply:

i)	Maximum Building setback from a street line	4.7 metres
ii)	Minimum width of a ground floor facade	30%
iii)	Landscaped area in the parking lot	2% of the area of the parking lot
iv)	Parking space size	2.6 metres x 5.5 metres
v)	Barrier free parking space size	4.4 metres x 5.5 metres

- 655. Within the lands zoned District Commercial (C6) Zone, identified on Map 1434 of Schedule "A" Zoning Maps and described as 1060 Wilson Street West, the following special provisions shall apply:
 - a) For the building located at the north-east corner of Wilson Street West and the access to the site, the following special regulations shall apply:
 - ii) Notwithstanding Subsection 5.2 b) i), the minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided and maintained.
 - iii) Section 5.2.1 a) shall not apply.

(Page 230 of 247)

- iv) Notwithstanding Section 10.5.3 a) ii), the maximum setback from the street line shall be 5.0 metres from Wilson Street West.
- b) Notwithstanding Section 5.6 c), the following number of parking spaces shall be provided and maintained for the entire site:
 - i) 385 parking spaces; and,
 - ii) 8 barrier free spaces.
- Within the lands zoned Mixed Use Medium Density Pedestrian Focus (C5a) Zone, identified on Map 912 of Schedule "A" Zoning Maps and described as 252-256 Victoria Avenue North and 290 Barton Street East, the following special provisions shall apply:
 - a) Notwithstanding Section 3: Definitions, for the purposes of this Special Exception, the front lot line shall be deemed Victoria Avenue North.
 - b) Notwithstanding Subsection 5.2 b) i), the minimum parking space size dimension of 2.6 metres by 5.5 metres shall be provided and maintained.
 - c) In addition to section 10.5 a), a minimum of landscaped strip of 2.0 metres in width shall be provided and maintained along Victoria Avenue North.
- Within the lands zoned Community Commercial (C3) Zone, identified on Map 1241 of Schedule "A" Zoning Maps and described as 675 Mohawk Road East, the following special regulations shall apply:
 - a) Subsection 4.25 (c)(ii) shall not apply.
 - b) Subsection 10.3.3(i)(vi) shall not apply.
- 666. Within the lands zoned District Commercial (C6) Zone, identified on Map 1187 of Schedule "A" Zoning Maps and described as 601 Upper Gage Avenue and 952 Fennell Avenue East, the following special regulation shall apply:
 - a) Notwithstanding Subsection 4.12 (f)(ii), expansions to buildings legally existing on the date of the passing of the by-law may be permitted provided the total expansion of the gross floor area of all the buildings on the site does not exceed 2,973 square metres.
- 667. Within the lands zoned District Commercial (C6) Zone, identified on Map 1447 of Schedule "A" Zoning Maps and described as 505 Rymal Road East, the following special regulation shall apply:

(Page 231 of 247)

- a) Notwithstanding Subsection 4.12 (f)(ii), expansions to buildings legally existing on the date of the passing of the by-law may be permitted provided the total expansion of the gross floor area of all the buildings on the site does not exceed 4,180 square metres.
- 11. That Schedule "D" Holding Provisions of By-law 05-200 is hereby amended by adding the following Holding Provisions:
 - "64. Notwithstanding Subsection 10.6 and Special Exception No. 562 of this Bylaw, on those lands zoned District Commercial (C6, 562) Zone, Modified, identified on Maps 1258 and 1259 of Schedule "A" – Zoning Maps and described as 1290 South Service Road, no development shall be permitted until such time as:
 - i) The owner / applicant enters into an appropriate development agreement with the City to extent the sanitary sewer and watermain, and to complete any road or traffic improvements on the adjacent streets or to pay his/her fair share of the works in case those works have been completed by others, all to the satisfaction of the Senior Director of Growth Management; and,
 - ii) That the owner/applicant demonstrates that an appropriate treatment train approach can be implemented on site using LIDs to satisfy the level 2 quality control requirements, to the satisfaction of the Senior Director of Growth Management and the Hamilton Conservation Authority.
 - 65. Notwithstanding Subsection 10.3.1, on those lands zoned Community Commercial (C3) Zone, identified on Map 1595 of Schedule "A" Zoning Maps and described as 8 Kingsborough Drive, no development shall be permitted until such time as:
 - i) The subject lands are consolidated with adjacent lands to ensure orderly development or demonstrate that the property can be developed on its own in accordance with the provisions of the Community Commercial (C3) Zone to the satisfaction of the Director of Planning and Chief Planner.
 - 66. Notwithstanding Subsection 10.6 and Special Exception No. 349 of this Bylaw, on those lands zoned District Commercial (C6, 349, H95, H96, H100, H101) Zone, Modified, identified on Maps 1501 and 1502 of Schedule "A" Zoning Maps and described as 512 Highland Road West, the H95 symbol may be removed by further amendment to this By-law at such time the Trinity Church Arterial Road is constructed to Rymal Road as the following condition has been satisfied:

(Page 232 of 247)

- i) That the owner agrees, in writing, to implement recommendations from an approved Traffic Impact Study (TIS), prepared by Paradigm Transportation Solutions Ltd., which shall be revised as phasing of the development proceeds, to the satisfaction of the Director of Engineering Services, Public Works Department.
- 67. Notwithstanding Subsection 10.6 and Special Exception No. 349 of this Bylaw, on those lands zoned District Commercial (C6, 349, H95, H96, H100, H101) Zone, Modified, identified on Maps 1501 and 1502 of Schedule "A" Zoning Maps and described as 512 Highland Road West, the H96 symbol may be removed to permit limited development abutting Stone Church Road by further amendment to this By-law at such time as the following conditions have been satisfied:
 - i) That the owner agrees, in writing, to pay its proportionate share towards the existing stormwater management facility located on the north side of Stone Church Road East and services installed on Stone Church Road East, including road urbanization, to satisfy the best efforts obligation, as outlined in the Heritage Green Subdivision Agreement, to the satisfaction of the Senior Director of Growth Management.
 - ii) That the owner agrees, in writing, to:
 - a) urbanize Upper Mount Albion Road from Stone Church Road East, including sanitary sewers, as required, from a midblock entrance to Stone Church Road East, to the satisfaction of the Senior Director of Growth Management, and the Director of Engineering Services, Public Works Department;
 - construct sidewalk from required street lighting on Stone Church Road East and Upper Mount Albion Road from the future Trinity Church Arterial Road to a midblock entrance on Upper Mount Albion Road; and.
 - c) construct a temporary sidewalk from a midblock entrance to Highland Road West;
 - all to the satisfaction of the Director of Engineering Services, Public Works Department.
 - iii) That the owner agrees, in writing, to implement recommendations from an approved, revised TIS for the proposed use, which identifies the current road network conditions, identified restrictions to access on Stone Church Road East, and the impacts and mitigations required for the road and pedestrian network, to the satisfaction of the Director of Engineering Services, Public Works Department.

(Page 233 of 247)

80. Notwithstanding Subsections 10.2, 10.3, 10.5 and 10.7 and Special Exception No. 300 of this By-law, on those lands zoned Neighbourhood Commercial (C2, 300) Zone, Modified, Community Commercial (C3, 300) Zone, Modified, Mixed Use Medium Density (C5, 300) Zone, Modified, and Arterial Commercial (C7, 300) Zone, Modified, identified on Maps 956, 957, 998, 999, 1046 and 1238 of Schedule "A" – Zoning Maps and described as:

Dranamty Addrasa	Man Number
Property Address	Map Number
194 Avondale Street	956
196 Avondale Street	956
197 Avondale Street	956
198 Avondale Street	956
199 Avondale Street	956
200 Avondale Street	956
201 Avondale Street	956
203 Avondale Street	956
204 Avondale Street	956
205 Avondale Street	956
206 Avondale Street	956
207 Avondale Street	956
208 Avondale Street	956
209 Avondale Street	956
210 Avondale Street	956
212 Avondale Street	956
214 Avondale Street	956
216 Avondale Street	956
217 Avondale Street	956
218 Avondale Street	956
219 Avondale Street	956
220 Avondale Street	956
221 Avondale Street	956
222 Avondale Street	956
223 Avondale Street	956
224 Avondale Street	956
226 Avondale Street	956
228 Avondale Street	956
797 Barton Street East	956
799 Barton Street East	956
889 Barton Street East	956
891 Barton Street East	956
893 Barton Street East	956
895 Barton Street East	956
897 Barton Street East	956
901 Barton Street East	956
903 Barton Street East	956

(Page 234 of 247)

Property Address	Map Number
905 Barton Street East	956
909 Barton Street East	956
913 Barton Street East	956
915 Barton Street East	956
925 Barton Street East	956
954 Barton Street East	956 and 957
970 Barton Street East	957 and 999
973 Barton Street East	957 and 999
983 Barton Street East	957
984 Barton Street East	957 and 999
985 Barton Street East	957 and 939
986 Barton Street East	957 and 999
991 Barton Street East	957 and 939
999 Barton Street East	957 and 999
1015 Barton Street East	957 and 999
1850 Barton Street East	1046
1860 Barton Street East	1046
1870 Barton Street East	1046
1880 Barton Street East	1046
1890 Barton Street East	1046
1900 Barton Street East	1046
1910 Barton Street East	1046
1920 Barton Street East	1046
1930 Barton Street East	1046
1940 Barton Street East	1046
1950 Barton Street East	1046
1960 Barton Street East	1046
1970 Barton Street East	1046
1980 Barton Street East	1046
1990 Barton Street East	1046
190 Cavell Avenue	956
192 Cavell Avenue	956
193 Cavell Avenue	956
194 Cavell Avenue	956
196 Cavell Avenue	956
198 Cavell Avenue	956
204 Gage Avenue North	956
208 Gage Avenue North	956
210 Gage Avenue North	956
212 Gage Avenue North	956
214 Gage Avenue North	956
216 Gage Avenue North	956
218 Gage Avenue North	956
220 Gage Avenue North	956

(Page 235 of 247)

Branarty Address	Man Number
Property Address	Map Number
200 Glendale Avenue North	957, 998 and 999
240 Glendale Avenue North	998 and 999
242 Glendale Avenue North	998 and 999
244 Glendale Avenue North	956, 998 and 999
246 Glendale Avenue North	998
248 Glendale Avenue North	956
250 Glendale Avenue North	956 and 957
1 Gordon Street	956
9 Gordon Street	956
10 Gordon Street	956
11 Gordon Street	956
12 Gordon Street	956
13 Gordon Street	956
14 Gordon Street	956
16 Gordon Street	956
17 Gordon Street	956
18 Gordon Street	956
19 Gordon Street	956 and 957
20 Gordon Street	956
21 Gordon Street	956 and 957
22 Gordon Street	956
23 Gordon Street	957
24 Gordon Street	956 and 957
25 Gordon Street	957
26 Gordon Street	956 and 957
28 Gordon Street	956 and 957
30 Gordon Street	957
32 Gordon Street	957
34 Gordon Street	957
36 Gordon Street	957
38 Gordon Street	957
40 Gordon Street	957
42 Gordon Street	957
44 Gordon Street	957
46 Gordon Street	957
48 Gordon Street	957
50 Gordon Street	957
51 Gordon Street	957
53 Gordon Street	957
132 Hester Street	1238
138 Hester Street	1238
141 Hester Street	1184 and 1238
143 Hester Street	1184 and 1238
146 Hester Street	1238
170 1163(6) 0(166)	1200

(Page 236 of 247)

Droporty Addross	Map Number
Property Address 151 Hester Street	1238
152 Hester Street	1238
	1238
158 Hester Street	
160 Hester Street	1238
8 Lincoln Street	957
10 Lincoln Street	957
11 Lincoln Street	957
12 Lincoln Street	957
13 Lincoln Street	957
14 Lincoln Street	957
15 Lincoln Street	957
16 Lincoln Street	957
17 Lincoln Street	957
18 Lincoln Street	957
19 Lincoln Street	957
20 Lincoln Street	957
21 Lincoln Street	957
22 Lincoln Street	957
23 Lincoln Street	957
25 Lincoln Street	957
26 Lincoln Street	957
27 Lincoln Street	957
29 Lincoln Street	957
32 Lincoln Street	957
33 Lincoln Street	957
14 Linden Street	957
16 Linden Street	956 and 957
18 Linden Street	957
19 Linden Street	956 and 957
30 Linden Street	957
2 Lloyd Street	956
4 Lloyd Street	956
6 Lloyd Street	956
8 Lloyd Street	956
10 Lloyd Street	956
12 Lloyd Street	956
20 Lloyd Street	956
26 Lloyd Street	956
32 Lloyd Street	956
34 Lloyd Street	956
36 Lloyd Street	956
38 Lloyd Street	956
40 Lloyd Street	956
42 Lloyd Street	956

(Page 237 of 247)

Property Address	Map Number
44 Lloyd Street	956
46 Lloyd Street	956
50 Lloyd Street	956
52 Lloyd Street	956
54 Lloyd Street	956
56 Lloyd Street	956
221 Melvin Avenue	1046
291 Rosslyn Avenue North	957
1012 Upper Wellington Street	1238
1020 Upper Wellington Street	1238
1028 Upper Wellington Street	1238
1042 Upper Wellington Street	1238
335 Woodward Avenue	1046

Any proposed redevelopment of an existing industrial use(s) shall require the fulfilment of the following prior to redevelopment taking place:

- i) A signed Record of Site Condition (RSC) has been submitted to the Director of Planning and Chief Planner, and the Ministry of the Environment (MOE). This RSC, must be to the satisfaction of the City of Hamilton, including acknowledgement of receipt of the RSC by the MOE.
- 81. Notwithstanding Subsection 10.2 and Special Exception Nos. 304 and 333 of this By-law, on those lands zoned Neighbourhood Commercial (C2) Zone, Neighbourhood Commercial (C2, 304) Zone, Modified and Neighbourhood Commercial (C2, 333) Zone, Modified, identified on Maps 1388 and 1389 of Schedule "A" Zoning Maps and described as 581, 587, 597 and 605 Garner Road East, no development shall be permitted until such time as:
 - The lands are assembled and comprehensively planned and a site plan control application has been approved for the assemble property, which ensures that access driveways onto Garner Road East are minimized and property sited, to the satisfaction of the Director of Planning and Chief Planner;
 - ii) Until such time as the Holding (H) provision is removed and the lands are redeveloped, the existing residential uses and the existing commercial uses may continue and minor additions, alterations or renovations shall be permitted. Any intensification that compromises the comprehensive redevelopment of the lands shall be prohibited.
- 82. Notwithstanding Subsection 10.3 and Special Exception Nos. 304 and 579 of this By-law, on those lands zoned Community Commercial (C3, 304, 579) Zone, Modified, identified on Map 1502 of Schedule "A" Zoning Maps and

(Page 238 of 247)

described as 136, 144 and 146 Upper Mount Albion Road, no development shall be permitted until such time as:

- i) Municipal sanitary sewers, municipal water and storm sewers are available and adequate to service the subject lands and a development agreement has been entered into by the owner with the City, to the satisfaction of the Senior Director of Growth Management.
- 83. Notwithstanding Subsection 10.7 and Special Exception No. 315 of this Bylaw, on those lands zoned Arterial Commercial (C7, 315) Zone, Modified, identified on Maps 1505 and 1506 of Schedule "A" Zoning Maps and described as 267, 275 283 and 293 Upper Centennial Parkway, no development shall be permitted until such time as:
 - i) There is adequate water and sanitary service capacity available to the subject lands and that it can be demonstrated that there are appropriate connections available for water and sanitary sewer, including the construction of a local sanitary sewer to the subject property to the satisfaction of the Senior Director of Growth Management.
- 84. Notwithstanding Subsection 10.2 and Special Exception No. 325 of this Bylaw, on those lands zoned Neighbourhood Commercial (C2, 325) Zone, Modified, identified on Map 1247 of Schedule "A" Zoning Maps and described as 2791 King Street East, no development shall be permitted until such time as:
 - i) The owner applies for and receives final approval Site Plan approval, to the satisfaction of the Director of Planning and Chief Planner, Planning and Economic Development Department; and,
 - ii) That the Owner(s) of 2791 and 2803 King Street East enter into an agreement with the City to be registered against the title of both the lot upon which parking is to be provided and the lot containing the use requiring the parking, to the satisfaction of the Director of Planning and Chief Planner, Planning and Economic Development Department.
- 85. Notwithstanding Subsection 10.2 and Special Exception No. 328 of this Bylaw, on those lands zoned Neighbourhood Commercial (C2, 328) Zone, identified on Map 1388 of Schedule "A" – Zoning Maps and described as part of 515 Garner Road East and Parts of 515, 527, and 535 Garner Road East, and 523 Garner Road East, no development shall be permitted until such time as:
 - The lands are assembled and comprehensively planned and a site plan control application has been approved for the assemble property, which ensures that access driveways onto Garner Road East are minimized, to

(Page 239 of 247)

- the satisfaction of the Director of Planning and Chief Planner, Planning and Economic Development Department;
- ii) Until such time as the Holding (H) provision is removed and the lands are redeveloped, the existing residential uses and the existing commercial use may continue and minor additions, alterations or renovations shall be permitted. Any intensification that compromises the comprehensive redevelopment of the lands shall be prohibited.
- 86. Notwithstanding Subsection 10.5 and Special Exception No. 329 of this Bylaw, on those lands zoned Mixed Use Medium Density (C5, 329) Zone, Modified, identified on Maps 1178 and 1179 of Schedule "A" Zoning Maps and described as 1173 and 1203 Old Golf Links Road, no development shall be permitted until such time as:
 - i) The approval of a servicing study and posting of appropriate securities to ensure implementation of the study's recommendations, to the satisfaction of the Manager of Engineering Design and Construction;
 - ii) The approval of design drawings for the re-construction of Old Golf Links Road and the posting of appropriate securities to ensure implementation of the approved drawings, all to the satisfaction of the Manager of Engineering Design and Construction; and,
 - iii) The owner/applicant conducts an archaeological assessment of the entire development property and mitigating, through preservation or resource removal and documentation, adverse impacts to any significant archaeological resources found. No demolition, grading or soil disturbances shall take place on the subject property prior to the approval of the Director of Planning and Chief Planner confirming that all archaeological resource concerns have met licensing and resource conservation requirements.
- 87. Notwithstanding Subsection 10.6 and Special Exception Nos. 337 and 570 of this By-law, on those lands zoned District Commercial (C6, 337, 570) Zone, Modified, identified on Map 1911 of Schedule "A" Zoning Maps and described as Part of 39 Garinger Crescent, no development shall be permitted until such time as:
 - i) The subject lands are developed in conjunction with the lands to the east, being 2544 Regional Road 56, to the satisfaction of the Director of Planning and Chief Planner, Planning and Economic Development Department.
- 88. Notwithstanding Subsection 10.5 and Special Exception No. 338 of this Bylaw, on those lands zoned Mixed Use Medium Density (C5, 338, H88, H89) Zone, Modified, identified on Maps 1639 and 1640 of Schedule "A" Zoning

(Page 240 of 247)

Maps and described as 2100 - 2190 Rymal Road East, the H88 symbol may be removed by further amendment to this By-law at such time as the following matters have been completed:

- i) The submission and approval of a Traffic Impact Study to address the need for, and timing of, any other required road improvements, prior to development of the subject lands, to the satisfaction of the Manager of Traffic Engineering and Operations, Public Works Department; and,
- ii) All roadway network upgrades required to facilitate the applications be identified and submitted, to the satisfaction of the Manager of Traffic Engineering and Operations, Public Works Department.
- 89. Notwithstanding Subsection 10.5 and Special Exception No. 338 of this Bylaw, on those lands zoned Mixed Use Medium Density (C5, 338, H88, H89) Zone, Modified, identified on Maps 1639 and 1640 of Schedule "A" Zoning Maps and described as 2100 Rymal Road East, the H89 symbol may be removed by further amendment to this By-law at such time as the following matters have been completed:
 - i) All matters listed under H88 have been satisfied; and,
 - ii) That the provision of adequate servicing has been allocated for the proposed development, to the satisfaction of the Senior Director of Growth Management, Planning and economic Development Department.

While the lands are zoned Mixed Use Medium Density (C5, 338, H89) Zone, Modified, all uses shall be permitted, except for sit down, take-out and drive-through restaurants, coffee shops, laundromats, dry cleaning establishments, hair salons, beauty parlours, aestheticians, and barber shops, which uses shall be restricted to a total gross leasable floor area of 743 square metres.

- 90. Notwithstanding Subsection 10.5 and Special Exception No. 552 of this Bylaw, on those lands zoned Mixed Use Medium Density (C5, 552) Zone, Modified, identified on Maps 1185 and 1239 of Schedule "A" Zoning Maps and described as 800 Upper Wentworth Street and 362 Mohawk Street East, no development shall be permitted until such time as:
 - The owner receives final approval of a Site Plan Control application, to the satisfaction of the Director of Planning and Chief Planner, Planning and Economic Development Department.
- 91. Notwithstanding Subsection 10.6 and Special Exception No. 583, on those lands zoned District Commercial (C6, 583) Zone, identified on Map 444 and 445 of Schedule "A" Zoning Maps and described as the south-easterly portion of 619 Centre Road and 645 Wigood Drive, no development shall be permitted until such time as:

(Page 241 of 247)

- i) The final alignment of the East-West Corridor has been determined, to the satisfaction of the Senior Director of Growth Management.
- ii) That no commercial uses be developed until such time that the east-West Corridor has been constructed adjacent to the subject lands.
- 92. Notwithstanding Subsection 10.6 and Special Exception No. 326 of this By-law, on those lands zoned District Commercial (C6, SE 326) Zone, Modified, identified on Maps 549, 580, 581, 582, 612 of Schedule "A" and described as Clappison's Corner, shown as Figure 9 of Schedule "F" Special Figures, the H105 symbol may be removed by further amendment to this By-law at such time as the following conditions have been satisfied:
 - i) The Holding Provision will prohibit development beyond 55,740 square metres of gross floor area for all uses within Blocks A and B only, excluding motel, hotel, community centre, and public uses until such time as arrangements financial or otherwise, are made for a road connection to Parkside Drive to the satisfaction of the Director of Planning and Chief Planner.
 - ii) The Holding Provision will prohibit the use of the subject lands for the proposed purposes as it affects Block E until such time that a municipal road allowance connecting the subject lands to Dundas Street East (Highway No. 5) has been dedicated to the City of Hamilton by way of a Plan of Subdivision to provide appropriate access to the subject lands, to the satisfaction of the Director of Planning and Chief Planner."
- 97. Notwithstanding Subsection 10.3 of this By-law, on those lands zoned Community Commercial (C3) Zone, identified on Map 1405 of Schedule "A" Zoning Maps and described as 420 First Road West, no development shall be permitted until such time as:
 - i) That those lands located within the 50 dBA sound level of the rock crushing establishment (All Around Contracting Yard) not be developed until such time as the establishment ceases to operate, to satisfaction of the Director of Planning and Chief Planner.
- 98. Notwithstanding Subsection 10.5.1 and Special Exception No. 604, on those lands zoned Mixed Use Medium Density (C5, 604) Zone, Modified, identified on Maps 1548 and 1593 of Schedule "A" Zoning Maps and described as Part of 1831 Rymal Road East, no development shall be permitted until such time as:
 - i) The subject lands have been consolidated with adjacent lands to a minimum 1,500 square metres or until such time as the owner / applicant has applied for and received final approval of a Site Plan Control

(Page 242 of 247)


application demonstrating a viable development, to the satisfaction of the Director of Planning and Chief Planner.

- 99. Notwithstanding Subsection 10.3 of this By-law, on those lands zoned Community Commercial (C3) Zone, identified on Map 1405 of Schedule "A" Zoning Maps and described as 420 First Road West, no development shall be permitted until such time as:
 - i) That all residential lands within 160 metres of the working licensed limits of the active quarry or the limits of the former quarry under rehabilitation shall not be developed until such time as the completion of mining and the completion of rehabilitation on the quarry lands immediately adjacent to the Holding (H) Zone have been finalized to the satisfaction of the Director of Planning and Chief Planner; and,
 - ii) That those lands located within the 50 dBA sound level demarcation of the All Around Contracting facility not be developed until such time as the facility ceases to operate, to the satisfaction of the Director of Planning and Chief Planner.
- 100. Notwithstanding Subsection 10.6 and Special Exception No. 349 of this Bylaw, on those lands zoned District Commercial (C6, 349, H95, H96, H100, H101) Zone, Modified, identified on Maps 1501 and 1502 of Schedule "A" Zoning Maps and described as 512 Highland Road West, the H100 symbol may be removed for the remainder of the lands by further amendment to this By-law at such time as the following conditions have been satisfied:
 - i) That the trunk sanitary and storm sewer outlets at Highland Road West and Upper Mount Albion Road are available, to the satisfaction of the Senior Director of Growth Management.
 - ii) That the owner agrees, in writing, to urbanize (sidewalk, streetlights, and sanitary sewers) for Highland Road West, from Upper Mount Albion to the Trinity Church Arterial Road and Upper Mount Albion Road from a midblock driveway to Highland Road West, to the satisfaction of the Senior Director of Growth Management.
- 101. Notwithstanding Subsection 10.6 and Special Exception No. 349 of this By-law, on those lands zoned District Commercial (C6, 349, H95, H96, H100, H101) Zone, Modified, identified on Maps 1501 and 1502 of Schedule "A" Zoning Maps and described as 512 Highland Road West, the H101 symbol may be removed by further amendment to this By-law at such time as the following condition has been satisfied:
 - i) the owner completes water distribution upgrades to District 7 Pump Station, and provides adequate water supply to the subject lands, to the satisfaction of the Senior Director of Growth Management.


(Page 243 of 247)

- 102. Notwithstanding Subsection 10.5 and Special Exception 652, on those lands designated on those lands zoned Mixed Use Medium Density (C5, 652 H102) Zone, Modified, identified on Maps 1748, 1749 and 1785 of Schedule "A" Zoning Maps, no residential development shall be permitted until such time:
 - i) the owner / applicant shall investigate the noise levels on the site and determine and implement the noise control measures that are satisfactory to the City of Hamilton in meeting the Ministry of the Environment and Climate Change recommended sound level limits. An acoustical report prepared by a qualified Professional Engineer containing the recommended control measures shall be submitted to the satisfaction of the City of Hamilton, Director of Planning and Chief Planner. Should a peer review of the acoustical report be warranted, all associated costs shall be borne by the owner / applicant and shall be submitted to the satisfaction of the City of Hamilton, Director of Planning and Chief Planner.
- 12. That Schedule "F" Special Figures of By-law 05-200 is hereby amended by adding Special Figures 8.0, 9.0 and 10.0.


(Page 244 of 247)

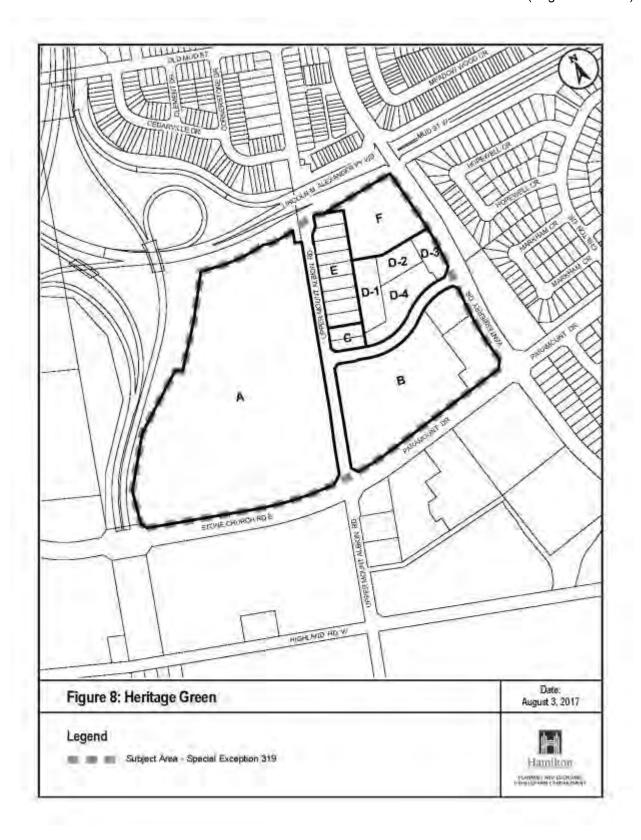

(Page 245 of 247)

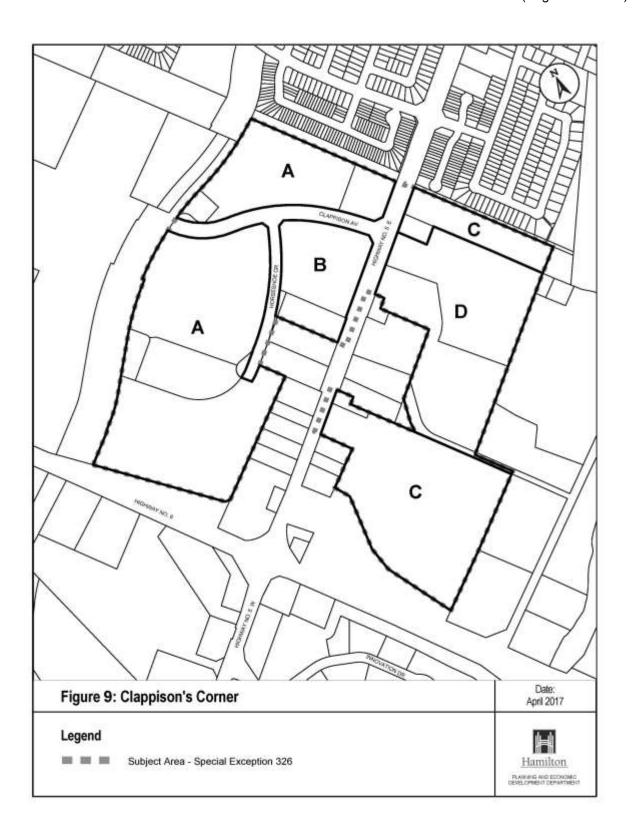

(Page 246 of 247)

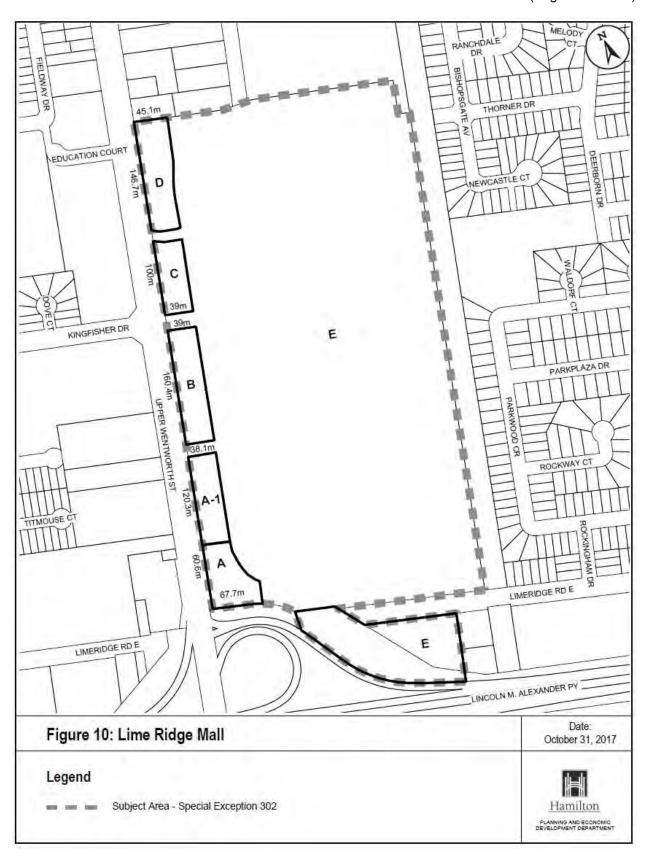

To Amend By-law 05-200 to Create New Commercial and Mixed Use Zones for the City of Hamilton

(Page 247 of 247)

- 13. That the Clerk is hereby authorized and directed to proceed with the giving of notice of passing of this By-law in accordance with the Planning Act.
- 14. That for the purposes of the Building Code, this by-law or any part of it is not made until it has come into force as provided by section 34 of the *Planning Act*.
- 15. That this By-law comes into force in accordance with section 34 of the Planning Act.

PASSED this 8th day of November, 2017.

F. Eisenberger

Mayor

R. Caterini

City Clerk

Effective Date of By-Law

By-Law Number

City of Hamilton Zoning By-Law 05-200

Hamilton

Note: Features in the Legend may not appear in each individual map for every batch series of map SCALE 1: 3,332

C.A. Regulated Area

Railway Lake

Zoning Boundary

Urban Boundary

Special Exception


Legend

Holding Provision


MAP 414 of Schedule 'A'

Note: Features in the Legend may not appear in each individual map for every batch series of map Effective Date of By-Law MAP 444 of Schedule 'A' City of Hamilton Zoning By-Law 05-200 C.A. Regulated Area Hamilton Special Exception Holding Provision Zoning Boundary Urban Boundary By-Law Number SCALE 1: 3,332 Legend Railway Lake Map Reference Number MAP 445 MAP 411 **SEE RURAL MAP 62** MAP 443

and Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOTA PLAN OF SURVEY

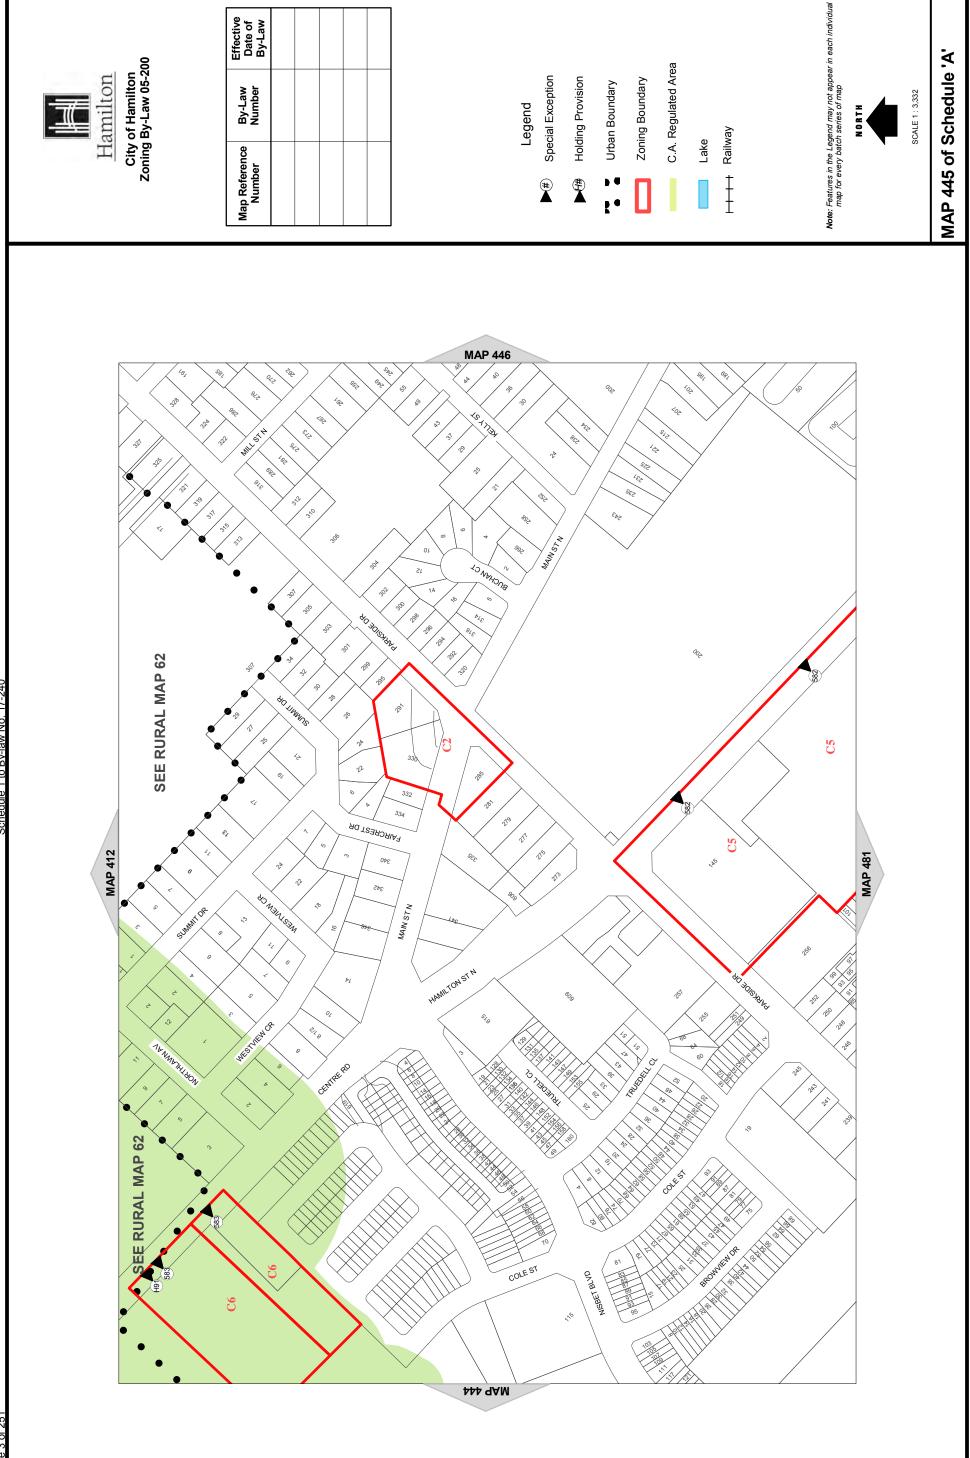


t Land Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

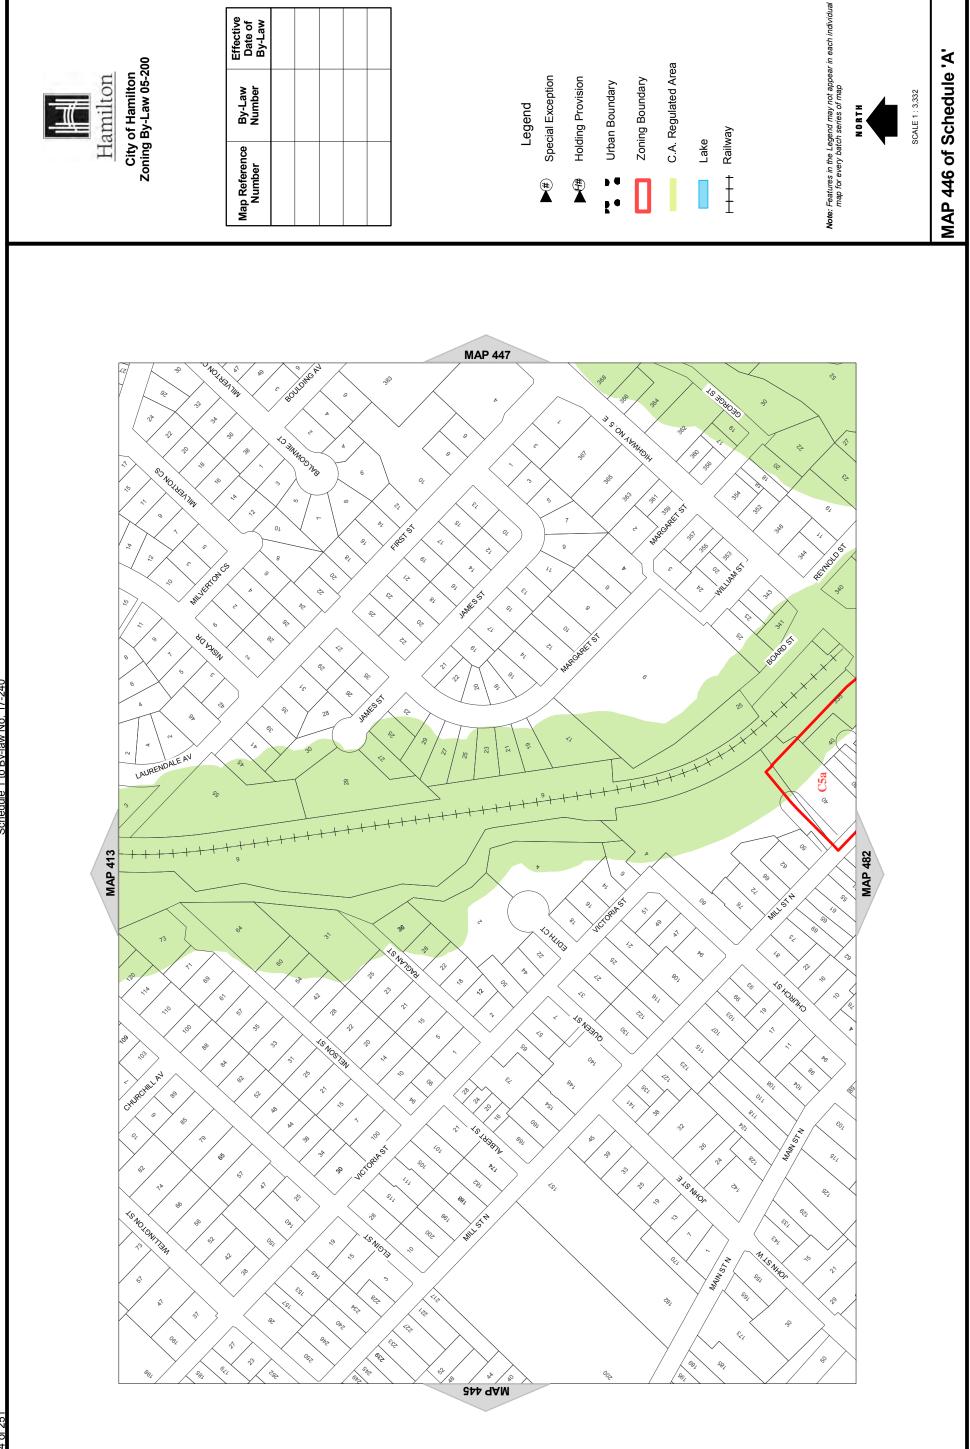


formation Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY



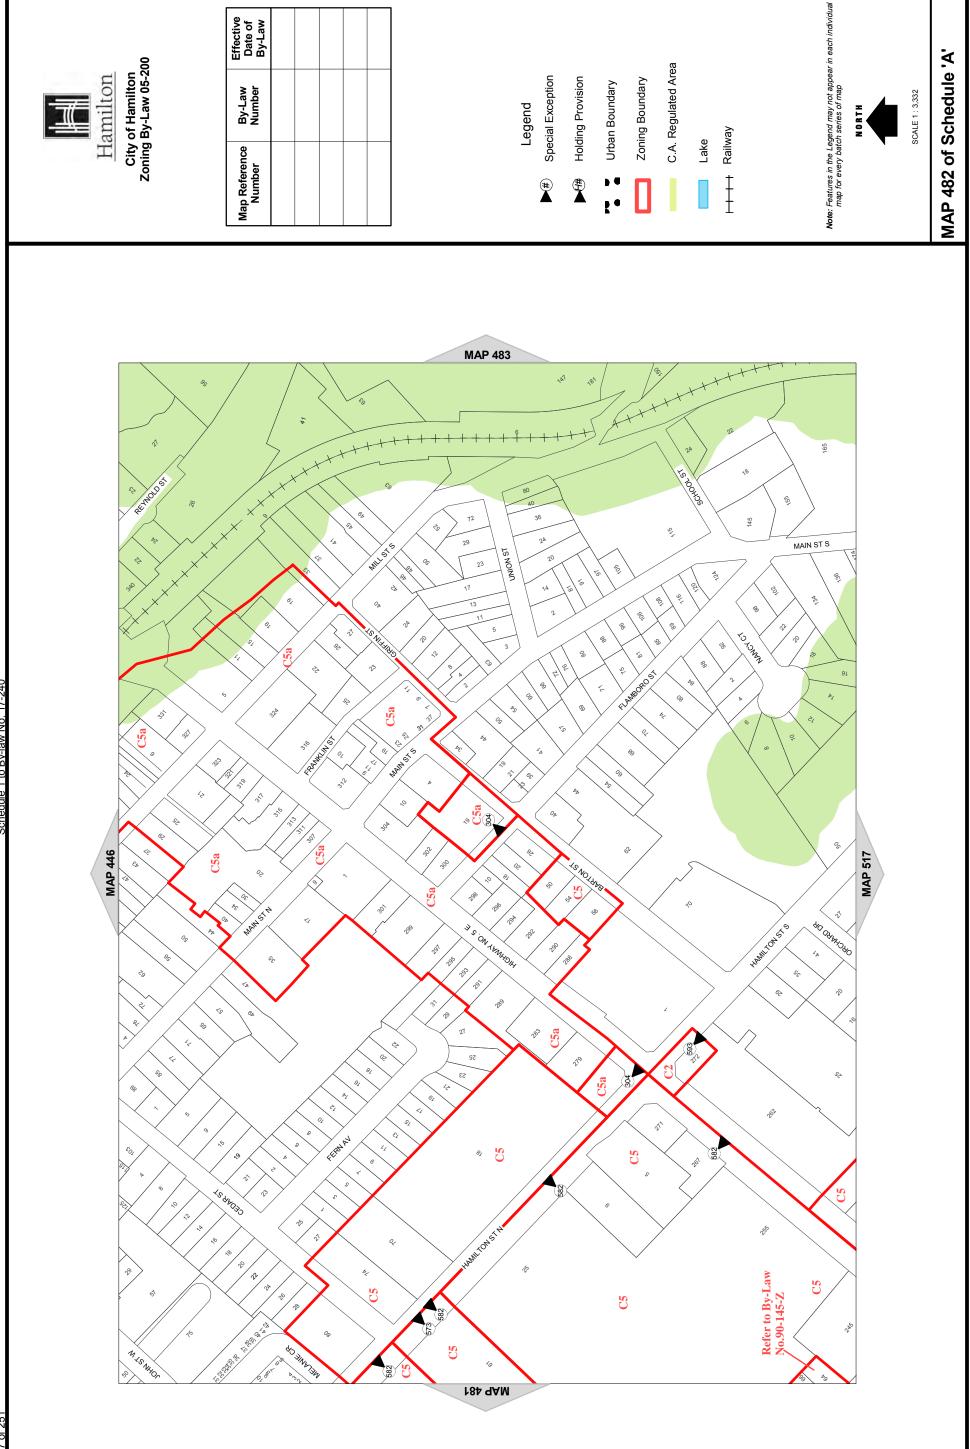



Land Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOTA PLAN OF SURVEY

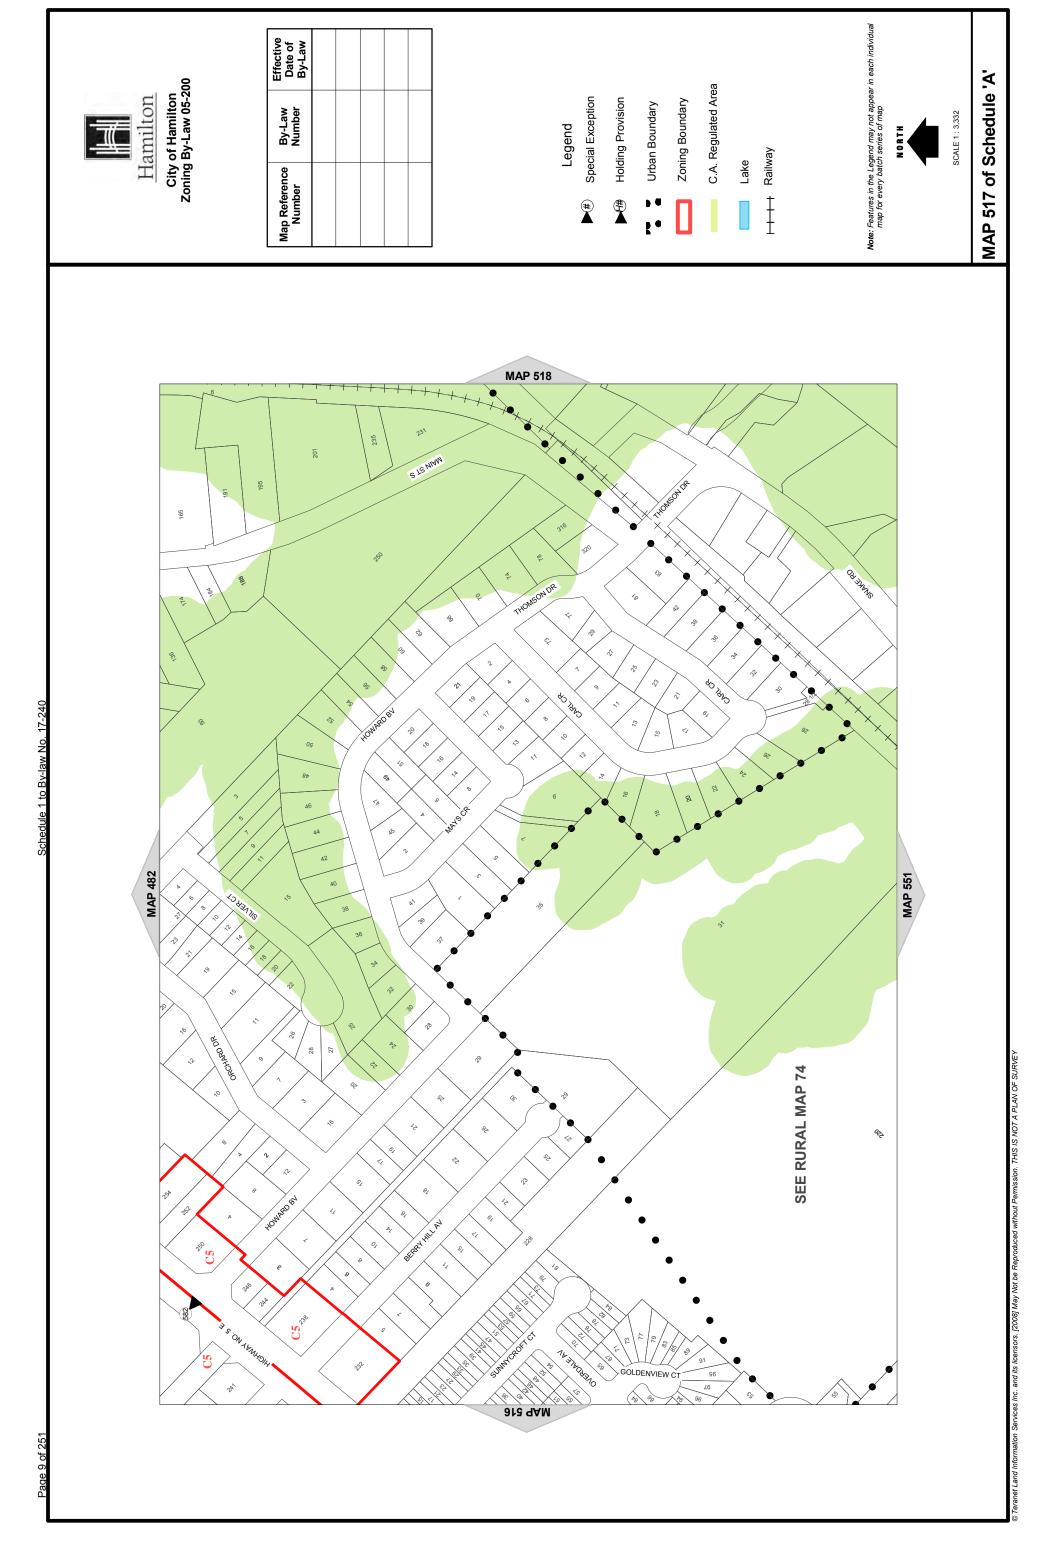

Note: Features in the Legend may not appear in each individual map for every batch series of map City of Hamilton
Zoning By-Law 05-200


Lands subject to appeals under
By-law 17-240. (By-law 17-240 is not in force on these lands.) Appellant
Canadian Tire Real
Estate Limited
(CTREL) MAP 549 of Schedule 'A' C.A. Regulated Area Special Exception Hamilton Holding Provision Zoning Boundary Urban Boundary SCALE 1: 3,332 Legend Railway Lake □ ~ MAP 550 3 S ON A BUNYOU CLAPPISONAV Schedule 1 to By-law No. 17-240 90 HORSESHOE CR MAP 515 MAP 581 90 842 **9AM**

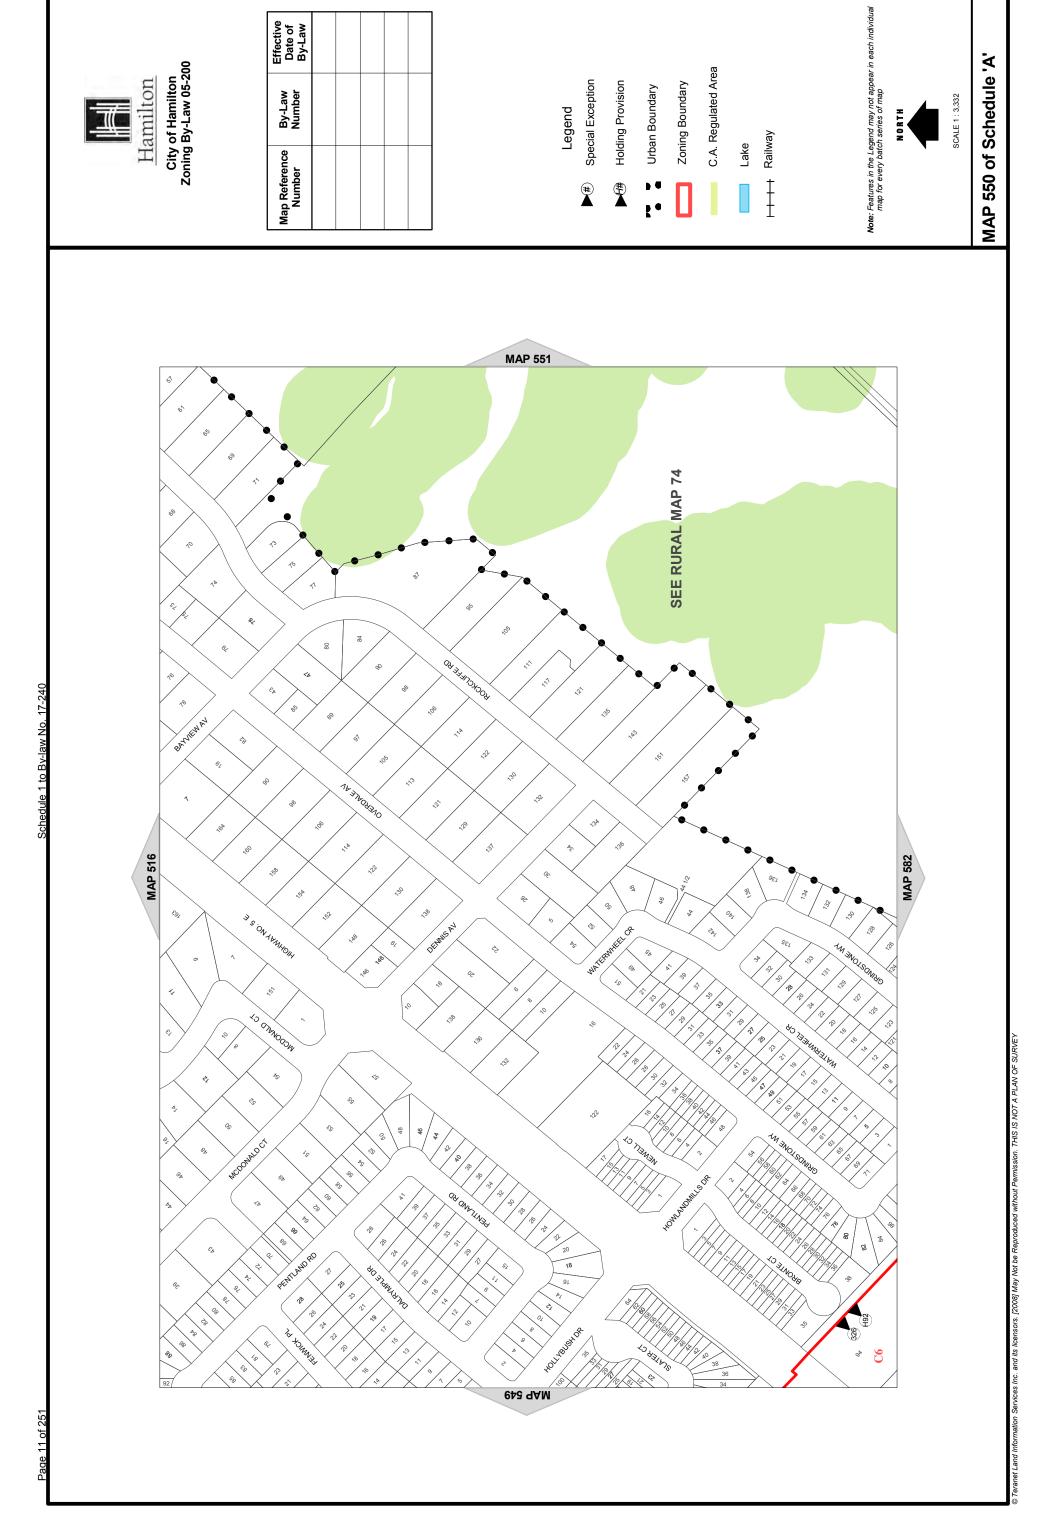

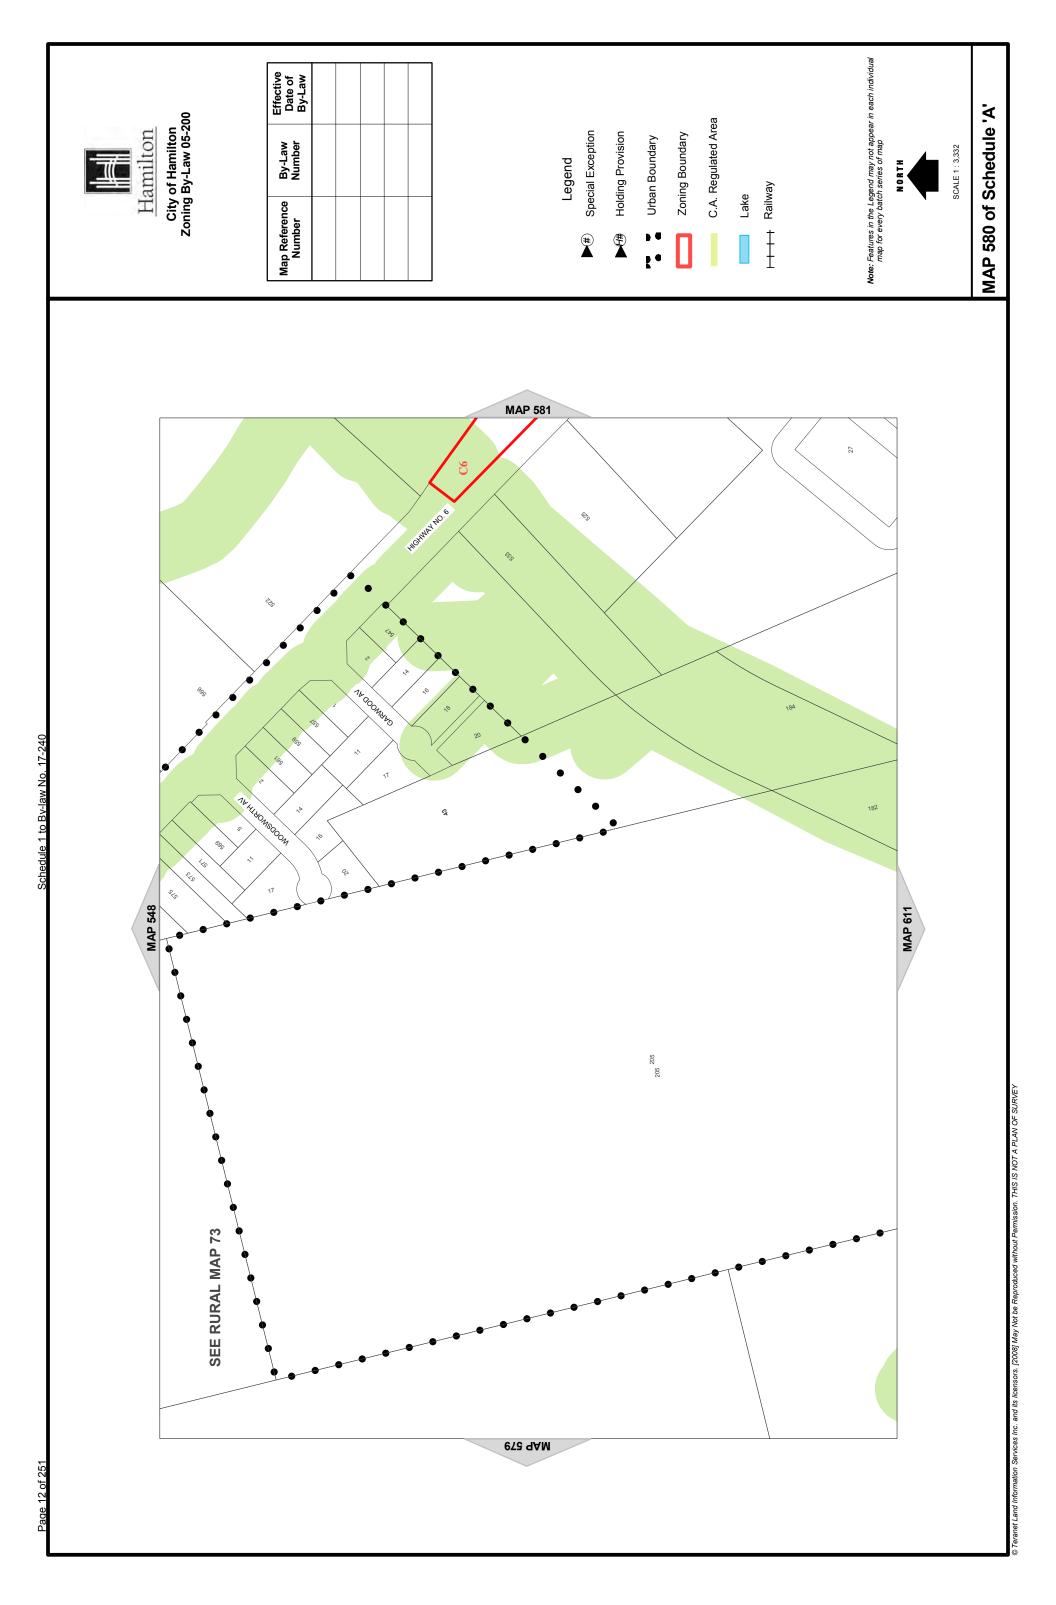


Note: Features in the Legend may not appear in each individual map for every batch series of map City of Hamilton
Zoning By-Law 05-200


Lands subject to appeals under
By-law 17-240. (By-law 17-240 is not in force on these lands.) Appellant
Canadian Tire Real
Estate Limited
(CTREL) MAP 581 of Schedule 'A' C.A. Regulated Area Special Exception Hamilton Holding Provision Zoning Boundary Urban Boundary SCALE 1: 3,332 Legend Railway Lake $^{\square} \, ^{\sim}$ **MAP 582** Refer to By-Law No. 05-200 90 90 3 S ON ADMINDING $^{\circ}$ 9 Schedule 1 to By-law No. 17-240 90 S MAP 549 **MAP 612** 90 90 90 Refer to By-Law No. 05-200 9 C S C 90 083 **9AM**

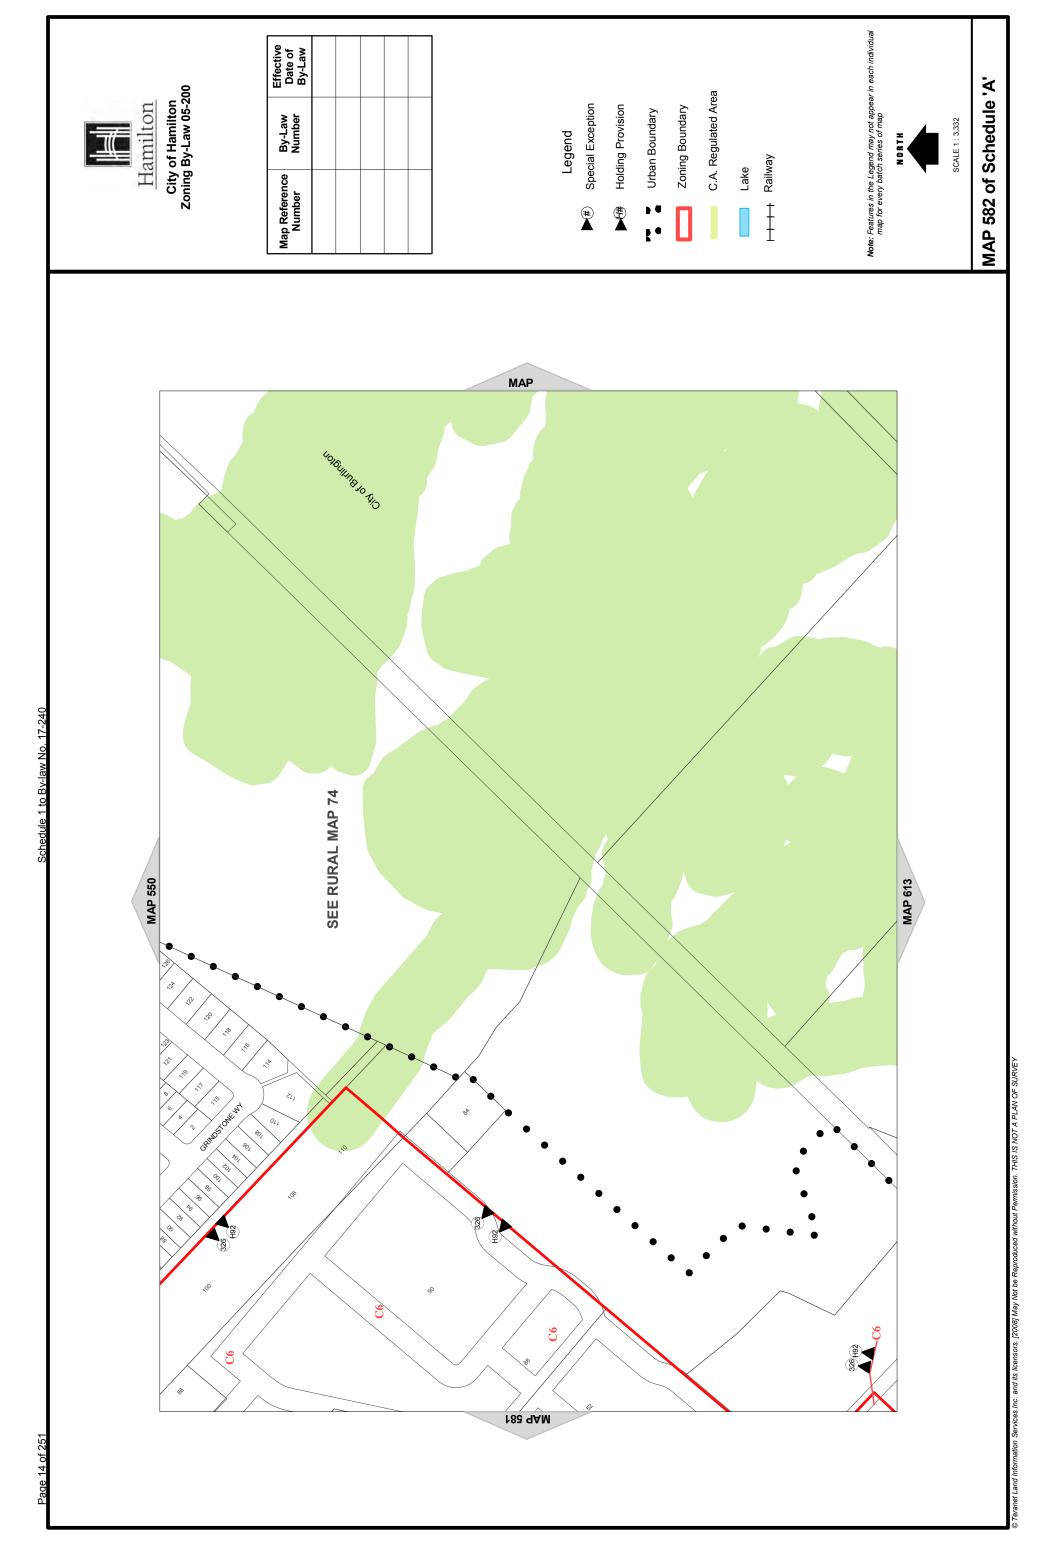

Note: Features in the Legend may not appear in each individual map for every batch series of map MAP 612 of Schedule 'A' City of Hamilton Zoning By-Law 05-200 C.A. Regulated Area Hamilton Special Exception Holding Provision Zoning Boundary Urban Boundary SCALE 1: 3,332 Legend Railway Lake **MAP 613** Que Haling and 90 **9**2 **SEE RURAL MAP 86** 9**D** MAP 581 MAP 643 ŝ INNOVATION DR INNOVATION DR N S ON ANNHONY 11 SEE RURAL MAP 86 rra gam




Map Reference Number	By-Law Number	Date By-La

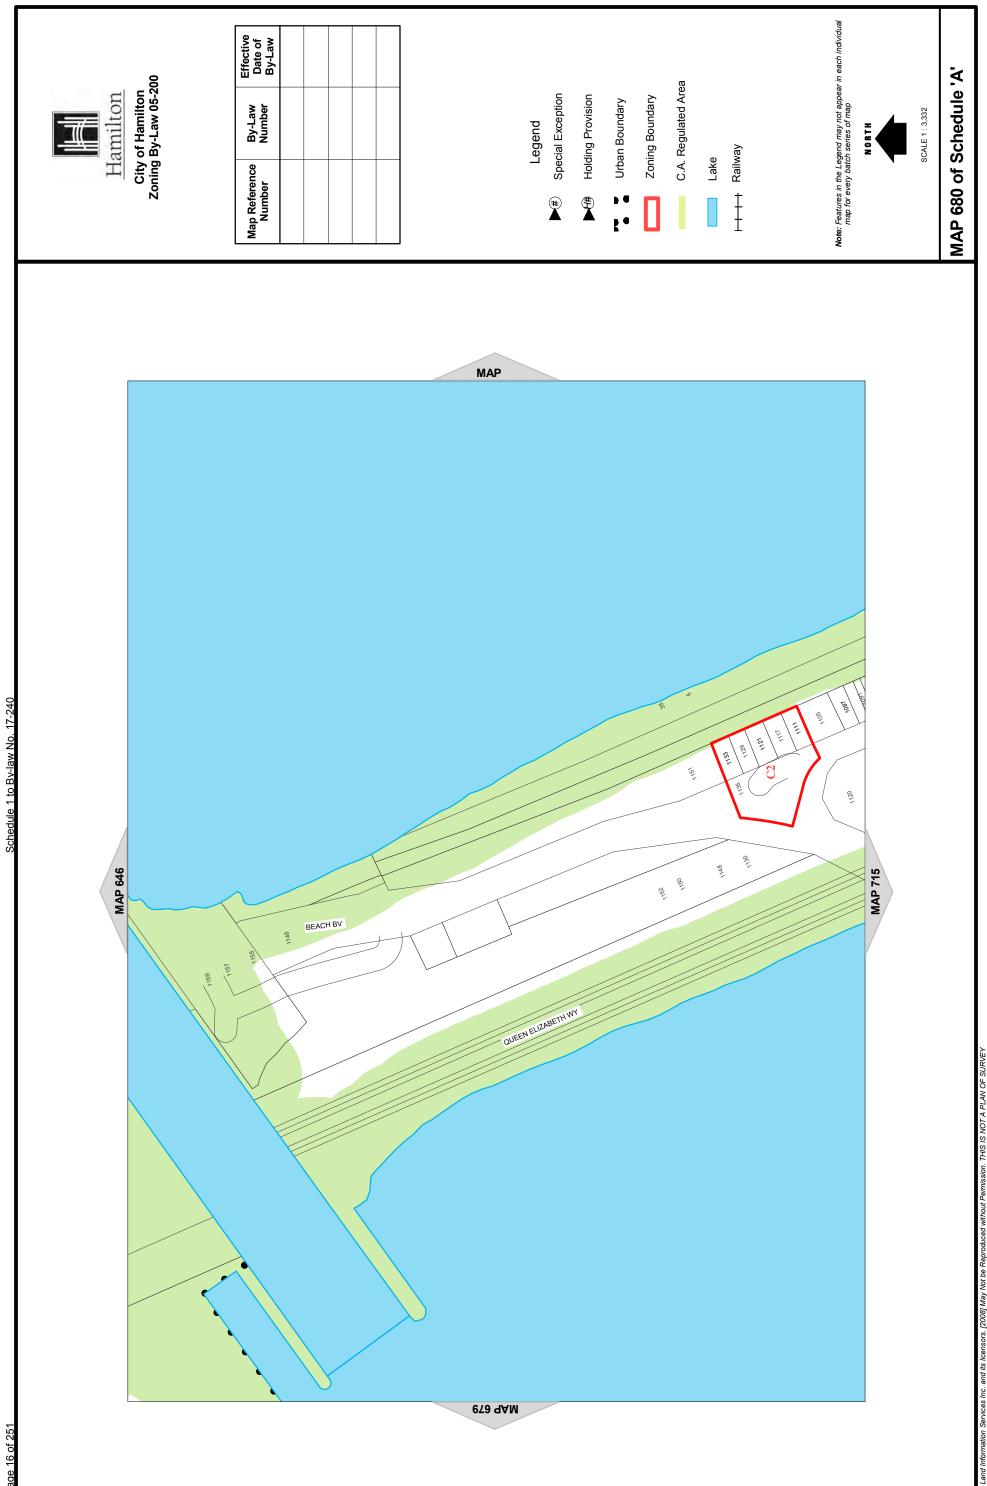


Land Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOTA PLAN OF SURVEY

anet Land Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURV

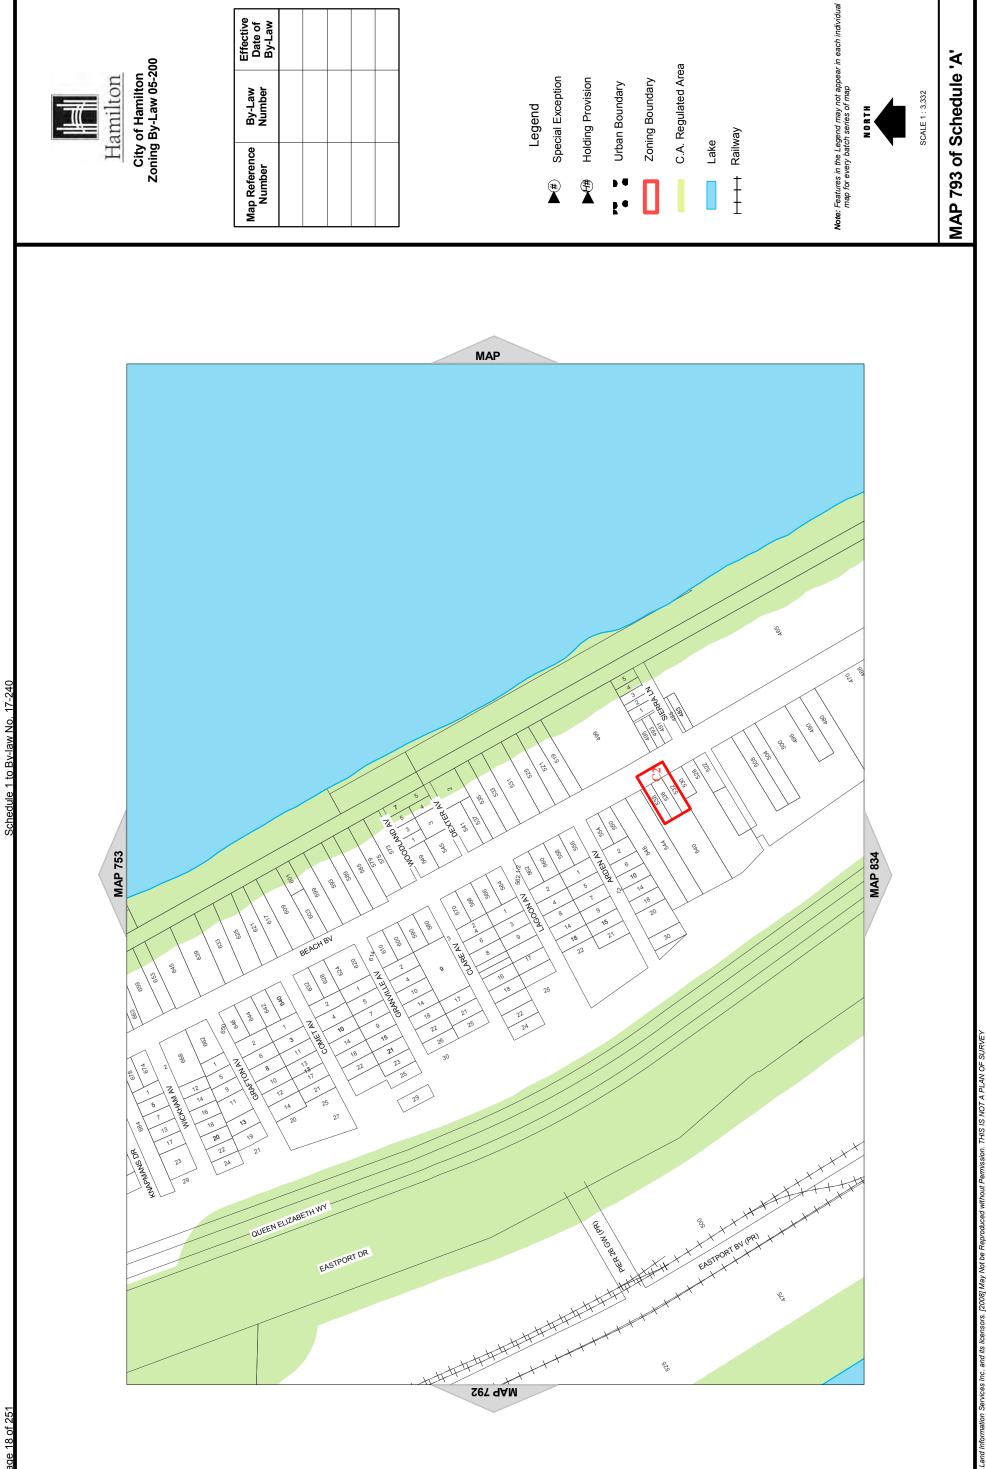

nation Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

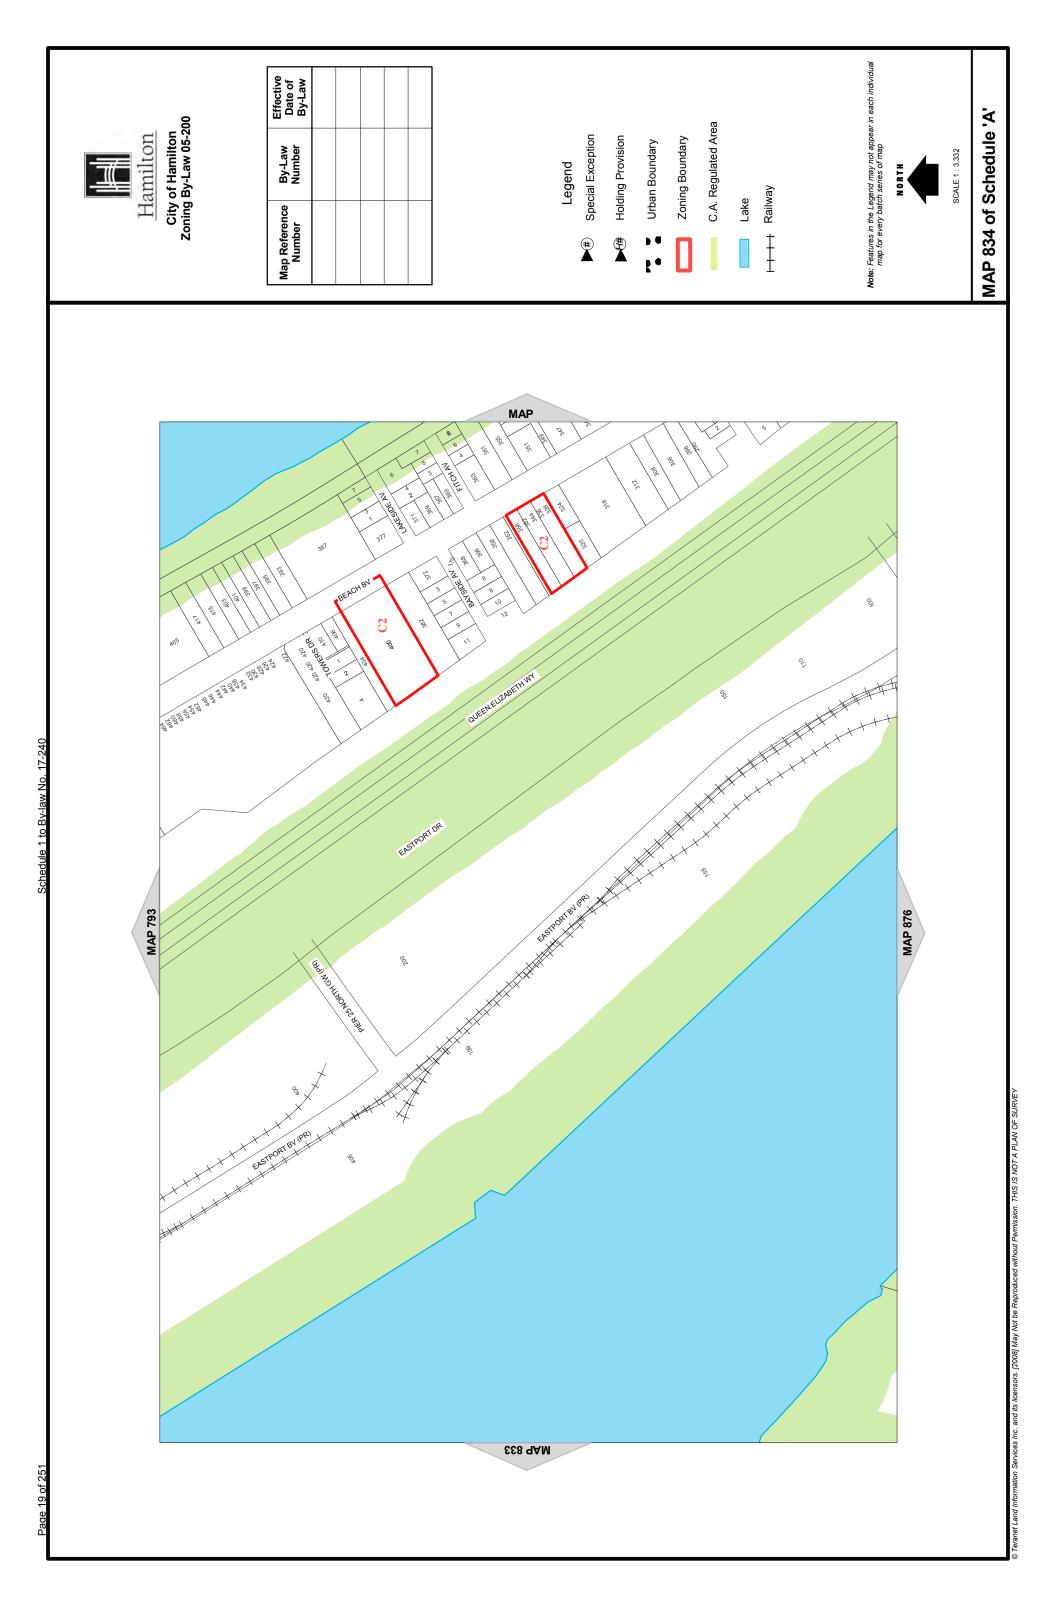

and Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SUI

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

QUEEN ST

†9

MAP 818

69

SZ

60L

211

\$

N_{IS} BBA

ح36

\$8

ALBERT ST

PRINCESS ST

∠ε

NTS ABIAM

628 9AM

nce By-Law Date of Number By-Law By-L
--



Note: Features in the Legend may not appear in each individual map for every batch series of map

Railway

‡ ‡

MAP 860 of Schedule 'A'

MAP 819

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

EAST ST N

HETEN 21

107

25/

723

12

61

52

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake Ī

35

EAST ST N

HUNTER CT

PARK ST E

55

15

13

CROSS ST

098 **GAM**

MELVILLE ST

18

38

97

MAP 862

Note: Features in the Legend may not appear in each individual map for every batch series of map


MAP 903

KING ST E

C5a

MAP 861 of Schedule 'A'

SCALE 1: 3,332

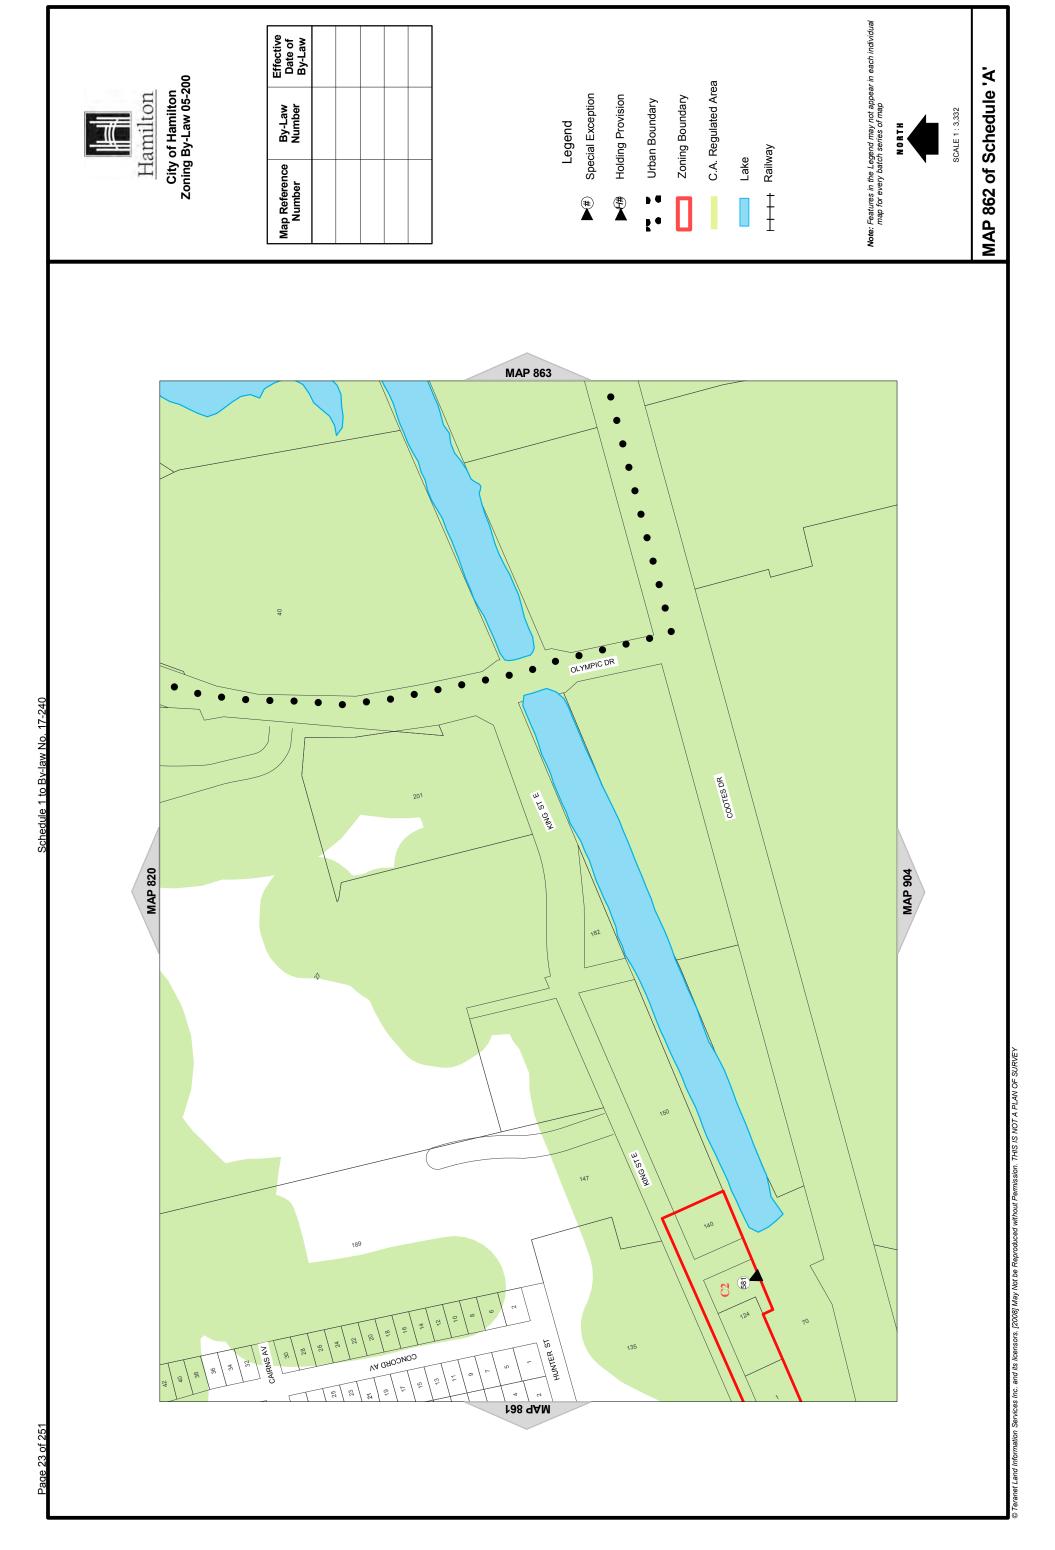

Effective Date of By-Law

00	Effectiv Date o			
City of Hamilton Zoning By-Law 05-200	By-Law Number			
	lap Reference Number			

204

WENTWORTH ST N

WILFRED ST

MAP 829

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Lake

MAP 872

^{BURLINGTON ST E}

MCKINSTRY ST

Railway

410

BRANT ST

MAP 913

Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 871 of Schedule 'A'

MAP 902 228 18 53 82 84 1/8 98 232 234 238 240 242 244 246 16 8 56 16 50 55 50 106 56 108 112 28 GOVERNOR'S RD 30 11 AMVST 12 15 14 17 WCT 19 21 54 56 58 60 62 64 66 68 BURDOCK LN(PR) 88 87 89 91 93 95 95 LARRAINE AV 26 SULLIVAN'S LN (PR) THISTIE LIVERS SULLIVAN'S LN HUNTINGWOOD AV JA ZWINGANI MAP 859 **MAP 943** 2 4 6 8 10 12 14 10 12 20 20 24 26 26 79 -60 10 15 A 22 CAROLIN CT (PR) 24 , BRIAR LN (PR) 12 108 6 4 2 25 15 TRUDY CT (PR) WINDMILL PL PATRICE CT (PR) ^^ 6 24 PATRICE C. PATRICE 10 20 NORTON CT WATCHGATE CT GOLFVIEW CR AD ST HUNTINGWOOD AV 33 SOBLEPL PINETREE CT 35 GOLFVIEW CR 92 14 006 **AAM**

Effective Date of By-Law City of Hamilton Zoning By-Law 05-200 Hamilton By-Law Number Map Reference Number

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Lake

Railway ‡ ‡

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 901 of Schedule 'A'

SCALE 1: 3,332

nd its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

Hamilton
City of Hamilton
Zoning By-Law 05-200
Number
Number
By-Law
By-Law

Legend
Special Exception
Holding Provision
Urban Boundary
Zoning Boundary
C.A. Regulated Area
Lake
Lake

Note: Features in the Legend may not appear in each individual map for every batch series of map
NORTH

SCALE 1 : 3,332

MAP 904 of Schedule 'A'

t Land Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

MAP 865

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

515

Legend	Special Exception	Holding Provision Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway
(*						Ī

MAP 908

906 9AM

S TS GNO8

SOUTH OV

NEWTON AV

1159

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 907 of Schedule 'A'

008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

MAP 868

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law						
By-Law Number						
Map Reference Number						

MACNARB ST N

HESS ST N

MAP 911

606 ЧАМ

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

103

VINEST

MACNAB STN

NTS ARAG

MAP 952

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 910 of Schedule 'A'

MAP 869

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Lake

MAP 912

061

NTS NHOL

016 9AM

N NA NOSUSAHA

CATHCART ST

Railway

MAP 953

Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 911 of Schedule 'A'

116 AAM

Effective Date of By-Law

By-Law Number

Note: Features in the Legend may not appear in each individual map for every batch series of map C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake


MAP 912 of Schedule 'A'

Effective Date of By-Law City of Hamilton Zoning By-Law 05-200 C.A. Regulated Area Hamilton Special Exception Holding Provision Zoning Boundary Urban Boundary By-Law Number Legend Railway Lake Map Reference Number Ī

Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 943 of Schedule 'A'

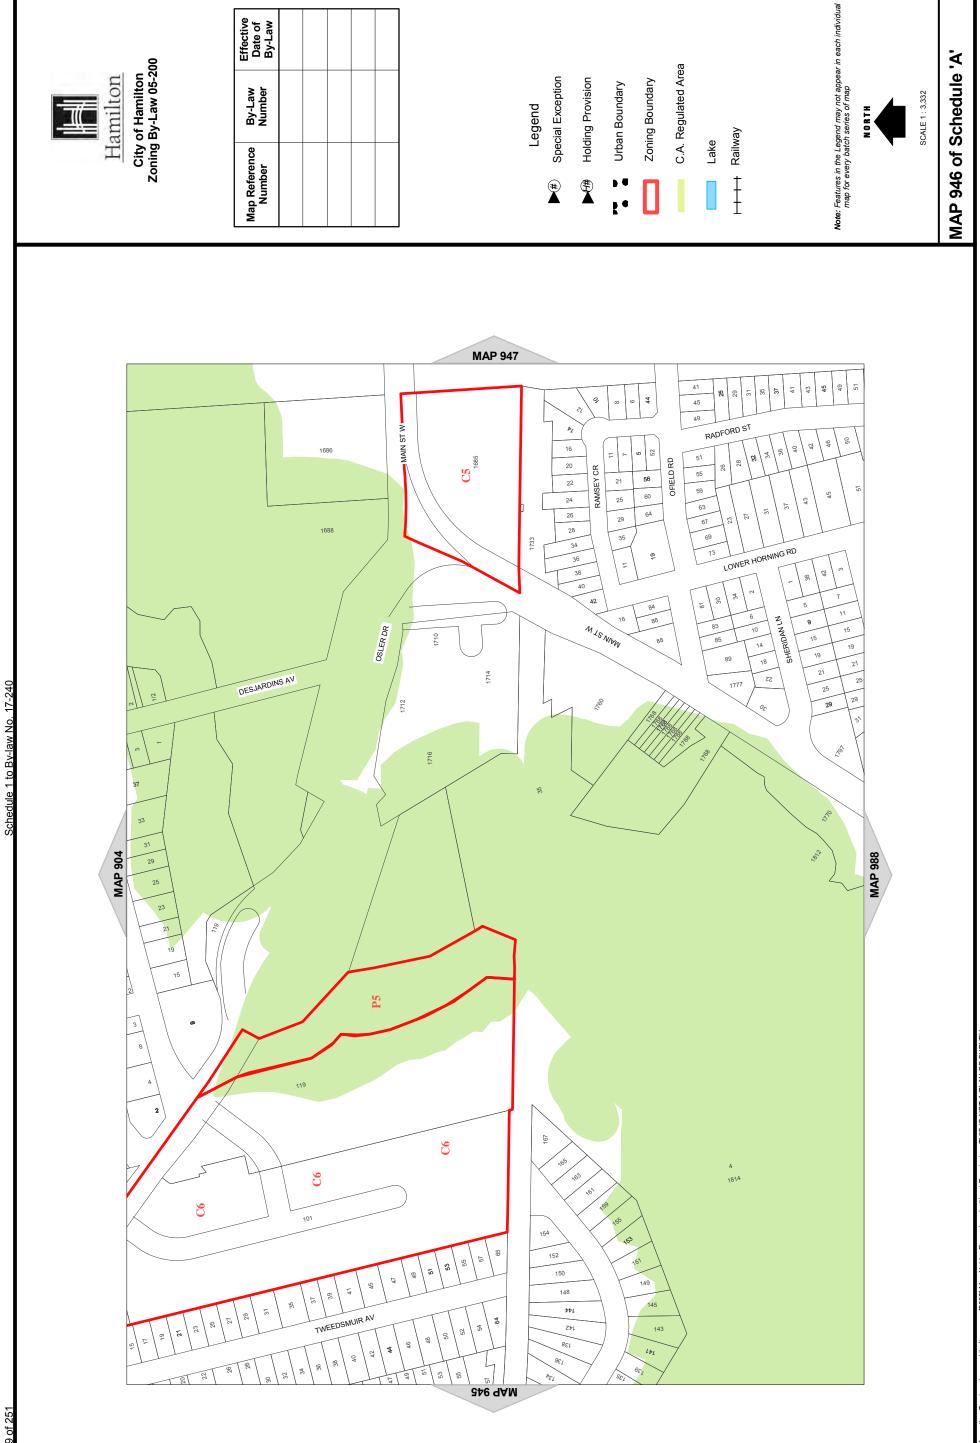

l Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

Effective Date of By-Law



6, 5, 8, 5, 7 SVA NOGGAH

DALEWOODAL

VA YTISA∃VINU

ввоскнойзе му (г

MAP 906

MAIN ST W

LELAND ST

77

103 107

S VA HTYSЯОЭ

GARYAU

as avosts

WESTWOOD AV

EMERSON ST

749 94N

TS NAMMO8


AYLETT ST

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Pegend	** Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	 Railway		
			r•	Ц			İ		
MAP 949				, ,	,				\
101 TH 0	φφ 9φ 9ς	\[\begin{align*} \varepsilon \varepsilon \\ \varep			1887	1880			
1, 1, 2, 1 8 1 8	WESTWOOD AV	\$\frac{\lambda \lambda \g}{\lambda \g}\$	# 8 8	28 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	82	905			
149 138 138 150		19	165		40 /40 /40 /40 /40 /40 /40 /40 /40 /40 /				SOA OF
\$\frac{A}{\pi_{\infty}} \bigg\rightarrow \frac{A}{\pi_{\infty}} \bigg\rightarrow \frac	98 69 EZ SZ	1, 2, 2, 3, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5, 5,	80 VL K	\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\		∕ ೡ	211		
98	64		* R		740	074 N	21219	223	\
26	T& 7	\(\lambda \)\(\lambda \)\(\lam	**	7,	5 1	222		233	M' 5
		/ 2 / 3 /	70 No.	74 Td2	3 101	115	236 236 240 244	17	245 249 253
MESTWOOD AV	5/19	140 P	7	1 <u>.</u> T-1	*	125		o)	528 528 583
173 6 733 6 6 733			88 88	88 76	103 172		190	62	192
133	\$ \\ \frac{1}{2} \\ \		30 / 00 / 00 / 00 / 00 / 00 / 00 / 00 /	% & &	- [] 	111 211	121	135	


VANOTZNIW

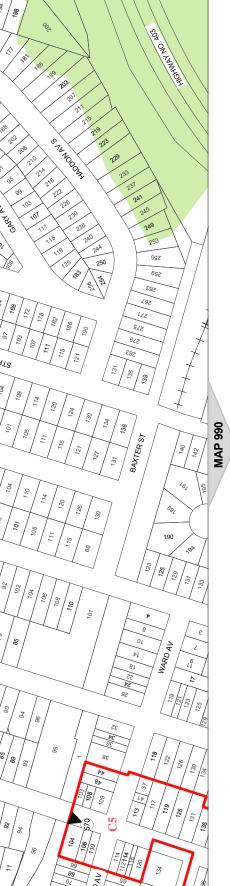



Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 948 of Schedule 'A'

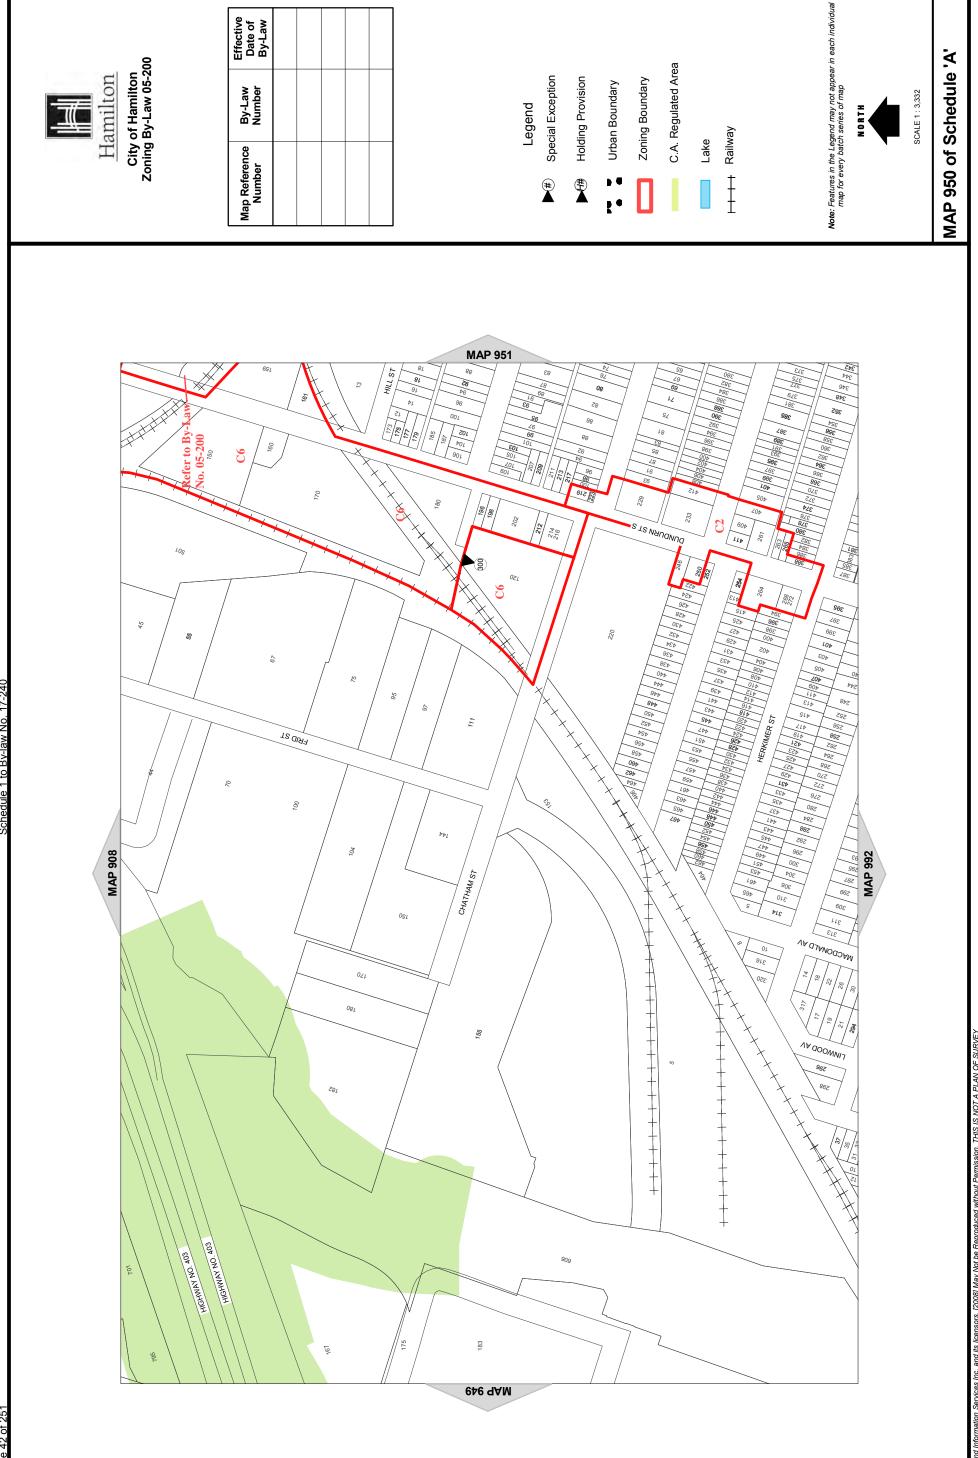

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

69

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	
	#	#	1 °			

33

52

25

9E1 9E1 9E1 2P1

\$ 551

\$

MAP 953

STS SAMAL

RACNAB STS

611

ROWWERS TN

2T2YA8

HESS ST S

MAIN ST W

123

291

55

CAROLINE STS

021 921

500

126 9AM

NTS NOSHOUH









Railway İ

Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 994

69

CHARLES ST

BOLD ST

715

130

STS YAAA

MAP 952 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

METLINGTON ST N

CATHCART ST

WILSON ST

NTSNHOL

TSYAAM

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

KING WILLIAM ST

TS SINAAL

Spl

CATHARINE STS

521

NTSTUNJAM

226

661 661 661

782

CATHARINE ST N

S26 9AM

MAP 954

Lake

Railway

Note: Features in the Legend may not appear in each individual map for every batch series of map

400

320 320

MAP 995

MAP 953 of Schedule 'A'

Hamilton

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

WENTWORTH ST N

Number		Number	By-Law
		Legend	
#	Spe	Special Exception	
	원	Holding Provision	
. • ! •	ÜĞ	Urban Boundary	
	Zon	Zoning Boundary	
	C.A.	C.A. Regulated Area	æ
	Lake		
1	Railway	/ay	



EMERALD STN

NNATRAB



Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 954 of Schedule 'A'

Effective Date of By-Law

MAP 955 of Schedule 'A'

MAP 959 09g 79g *bbg* NA YTTA AV ÞE9 232 230 258 258 259 ROOSEVELTAVE VA NOTAJAATS 272 **MAP 916** 400 BEACH RD 921 921 921 221 021

City of Hamilton Zoning By-Law 05-200

Hamilton

Note: Features in the Legend may not appear in each individual map for every batch series of map Effective Date of By-Law C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary By-Law Number Legend Railway Lake Map Reference Number Ī

BENSONAV

786 9AM ⊗\%

SCALE 1: 3,332

MAP 1000


C4

1211

2

1267

MAP 958 of Schedule 'A'

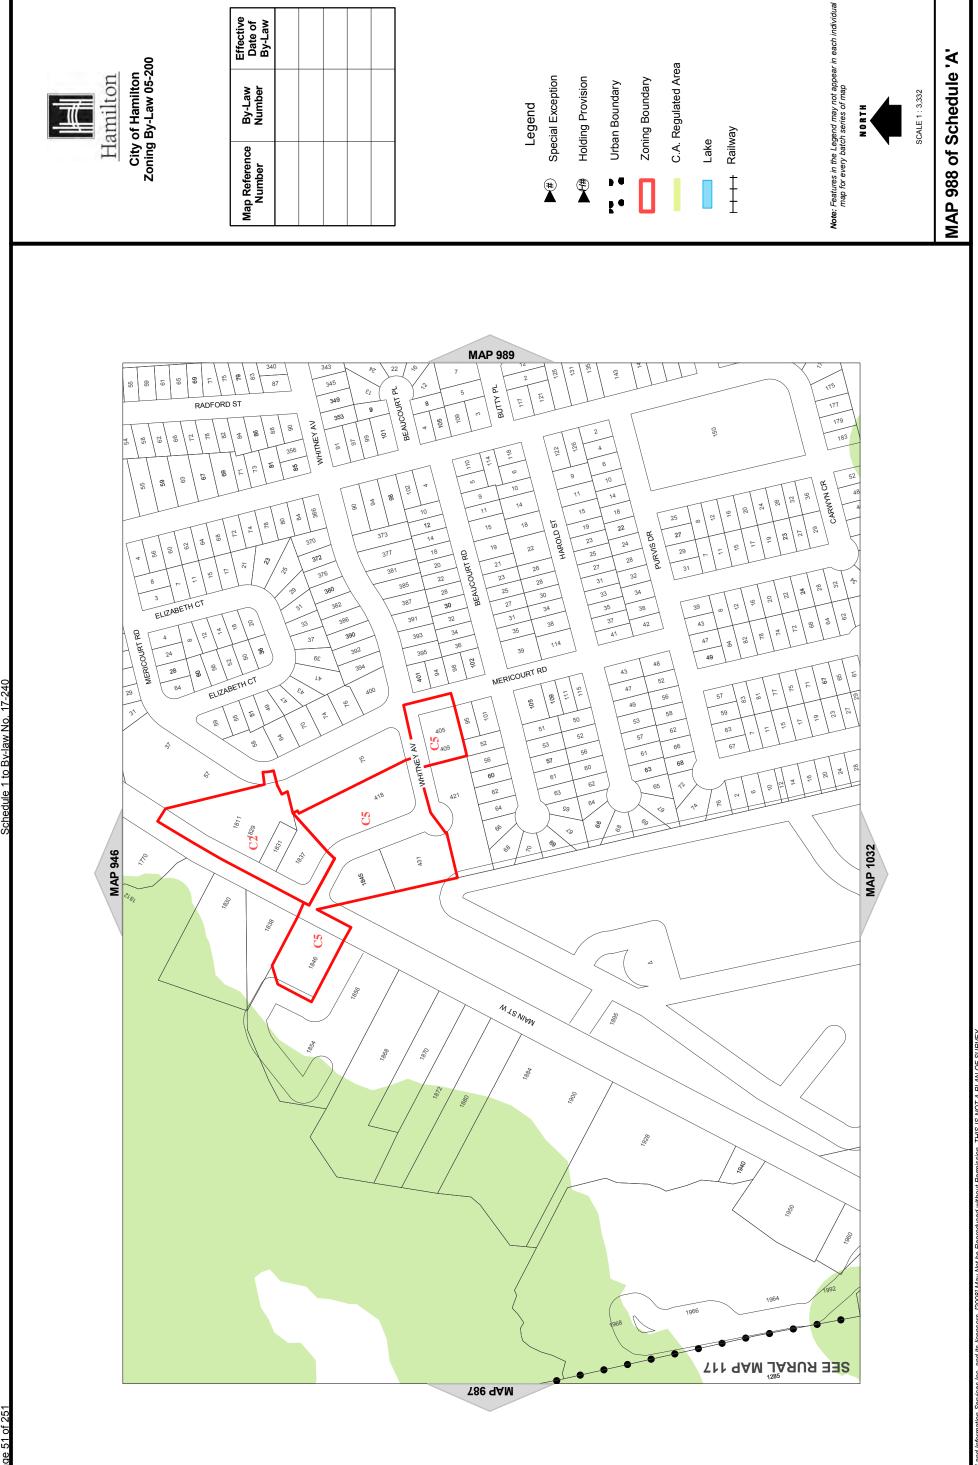

ices Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

N OF SURVEY



City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

| E9| | **S9|** | 49| | 14|

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	
	#		} •			

MAP 993





Railway İ

VA VIATNUOM

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 992 of Schedule 'A'

MAP 1036

251 081 COTTAGEAV WILES CT *⊅*0*♭* 10₺ BEULAHAV 80₽ 90₽ 212 327 BEULAHAV 331 <1.b 274 _STS NAU aNU a 420 425 **MAP 950** CHEDOKE HAWTHORNE 360 127 131 166 **9AM**

City of Hamilton Zoning By-Law 05-200 Hamilton

196 196 198

MAP 951

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake
	#		r•			

MAP 994

 $\iota_{\iota_{I}}$

773

CAROLINE STS

Þ9_L

02 ZZ

852 954

UNDERMOUNTAV

ε

VA WIATWUOM

71E | 25E | 25E

9AM

50

\$

54

CAROLINE STS

992 991

881 181

Þg

621 8

141 841

681

KENT ST

\$20 \SQ\$

QUEEN STS



Railway ‡ **Note:** Features in the Legend may not appear in each individual map for every batch series of map

TURNER AV

291 691

MAPLESIDEAV

RAVENSCLIFFE AV

MAP 1037

MAP 993 of Schedule 'A'

IRVEY

City of Hamilton Zoning By-Law 05-200

WESTAVS

MAP 953

WELLINGTON STS

FERGUSONAVS

2T2TUNJAN

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

			By-Law
	_	Legend	
#	Spec	Special Exception	

MAP 996

35.2 35.6 72.2

CLAREMONT AC

WESTAVS

Legend	# Special Exception	(4) Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	-+ Railway
		X	t•	Ц			Ī

110

ENATENS

Note: Features in the Legend may not appear in each individual map for every batch series of map

EMERALD ST S

VICTORIA AV

MAP 1039

59¢ 5**2**¢ 59**2** 520

550

WELLINGTON STS

TS ARORUA

FERGUSONAVS

98₁

201 E01 101

₽66 4M

MAP 995 of Schedule 'A'

Hamilton

City of Hamilton Zoning By-Law 05-200

- ACORN ST

MAP 954

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

KING ST E

WENTWORTH ST S

N NA GROANAS

189

920 *b19* 612

959 954

462 460 458

50 40

TISDALE ST S

733

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Holding Provision Special Exception Zoning Boundary Urban Boundary Legend Lake

MAP 997

C3

283

7**79** | 829 | 789

299 2

\$\$\text{9}\$
\[\lambda \text{15g} \\ \lambda \text{25g} \\ \lambda

436 435

EMERALD ST S

200

366 ¶AM | 0₽E |

S

63

0∠€

Railway

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 996 of Schedule 'A'

915

BLYTHEST

 g_{G_L} 191

130 128 128 138

20L

GEI GEI EEI

147

/ **%** /

8

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

056 816 916

016

3 0 2

\$18 810

982

292

968 893

198

| 118 | 25 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 | 218 |

FAIRLEIGHAVN

TS NOTAITS

KING ST E

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Lake

MAP 998

Railway

Note: Features in the Legend may not appear in each individual map for every batch series of map

150

150

88

TS SIARIUB

966 **Ч**AM

*₽*99

ST. CLAIRAV

NAUOBTSAB

MAP 997 of Schedule 'A'

Hamilton

00	Effective Date of By-Law			
City of Hamilton Zoning By-Law 05-200	By-Law Number			
City Zoning	//ap Reference Number			

N VA MASJAB

MELROSEAVN

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

7000	
redella	
Special Exception	
Holding Provision	
Urban Boundary	
Zoning Boundary	
C.A. Regulated Are	Ø.
	Legend Special Exception Holding Provision Urban Boundary Zoning Boundary

MAP 999

1022

766 9AM

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway		
	#	*	; ·		ı		‡ ‡		

GLENDALE AVN



MAP 998 of Schedule 'A'

WELROSE AV S

Hamilton

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

MAP 1039

BELVIDEREAV

89

92

SEARLEST

484

BARKER AV

Þg

72

18

ARCADE CR

7E01 9AM

CLAREMONT AC

53

ELCHO ST

041

HARBOURNIEW LN (PR)

01

CLAREMONT AC

JAMES MOUNTAIN RD

28

26 16

12 8

KINGSWAY DR

LOUISAAV

SĮ

ROCKWOOD PL

MAP 994

916

GLOUCESTER RD

56

4

KNYVETAV

154

901 001

Lake

Railway Ī

HIGHOLIFFE AV

154

001 96

Note: Features in the Legend may not appear in each individual map for every batch series of map

2/1

MAP 1084

MAP 1038 of Schedule 'A'

Effective Date of By-Law

2A/TWO

ALANSON ST

UA TWARD

CHARL TON AVE



Effective Date of By-Law			
By-Law Number			
Map Reference Number			

:	Effective Date of By-Law			
	By-Law Number			
	Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake

MAP 1041

\$

510

FAIRLEIGH CR

200

Note: Features in the Legend may not appear in each individual map for every batch series of map

TS ANJGOG

VIEWPOINTAU

40

CONCESSION

516, 522 520, 524526

019

09₺

\$14

VATIMMUS

366

841

911 911

102

127

bb1

C5a 473

69_[

13>

131 127

153

411

£11

66 96

48

6E01 9AM

MAP 1040 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

5 888

Refer to By-Law No. 05-200

VB GROAHSA

50

861

FAIRLEIGH CR

221 221

156

SHERMANAVS

EASTBOURNE AV

0401 **9AM**

Effective Date of By-Law			
By-Law Number			
Map Reference Number			


ALBERT ST

	Number	r Number	By-Law
J		-	-
		Legend	
	#	Special Exception	_
		Holding Provision	
	ľ	Urban Boundary	
))		

MAP 1042

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway	
	#	***************************************	r.		l		Ī	

285



Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1087

MAP 1041 of Schedule 'A'

MAP 998 DUWSMUNE RD

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			


Map Reference Number	ence	By-Law Number	Date of By-Law
	_	Legend	
#	Spe	Special Exception	
	Holo	Holding Provision	
} •	Crb	Urban Boundary	
	Zon	Zoning Boundary	
	C.A.	C.A. Regulated Area	æ

MAP 1043


8/2/

MAP 1041

| 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 | 106 |



KING STE



KENSINGTON AV S

VA YASHTOA

GAGEAVS

500

MAP 1088

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1042 of Schedule 'A'

KENSINGTON AV N



City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

	Effective Date of By-Law			
	By-Law Number			
•	Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway
	#		r •				Ī

MAP 1044

DUNSMURE RD

Zoning Bour	C.A. Regulat	Lake	Railway	
			İ	

1568 1264 1264

EDGEWON1 21 2

SIS NOGNOT

V STE

1,150

1150

GROSVENOR AVS

1348

S VA JAROMJAB

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1043 of Schedule 'A'

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area
	#	#	1 ·		

MAP 1043









Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1044 of Schedule 'A'

5**5**00

WEIR ST N

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

SHELBYAU


A401 9AM

	5		By-Law
	-	7000	
	_	regeria	
#	Spec	Special Exception	
	Hold	Holding Provision	
		1	
P ·	Urb	Urban Boundary	

MAP 1046

C.A. Regulated Area Zoning Boundary

128 / 133 / 137 /



MAP 1045 of Schedule 'A'

752

bbz

00	Effective Date of By-Law			
City of Hamilton Zoning By-Law 05-200	By-Law Number			
City Zoning	Map Reference Number			

VA GRANGOON'

437

9461

449

EMBURY CT

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway	
	#		t •				Ī	

MAP 1048

349

BILARDI CT

BARTON STE

BRUNSWICK ST

308 918 918

WAVERLYST

9401 **94**M

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1047 of Schedule 'A'

SCALE 1: 3,332

MAP 1093

96₽

bbb 9Ep

City of Hamilton Zoning By-Law 05-200

940

Hamilton

Effective Date of By-Law C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary By-Law Number Legend Railway Lake Map Reference Number ‡ ‡

MAP 1049

7401 **9**AM

SCALE 1: 3,332

Note: Features in the Legend may not appear in each individual map for every batch series of map

350

52

MAP 1094

CENTENNIAL PYN

BANCROFT ST

164

370

354

333

330

MAP 1048 of Schedule 'A'



39

41

227

5

219

8701 **GAM**

38

40

255

251

36

201 203 38

40

195 199

39

187

3

119 175 169

Legend

Effective Date of By-Law

By-Law Number

MAP 1079 of Schedule 'A'

Note: Features in the Legend may not appear in each individual map for every batch series of map Railway

153

MAP 1084 GENESEE ST 652 \$50 658 889 782 GLENWOOD CR 981 041 441 841 WEST 2ND ST 22 19 WEST 3RD ST 4 83 48 WEST 4TH ST 8 ₹39 WEST 5TH ST WEMBLEY RD MAP 1037 100 FENNELL AV W 091 291 841 94 0 245 13> 125 GOVERNORS BV (PR) 158 *b11* <0_L 211 £01 2801 **9AM**

Note: Features in the Legend may not appear in each individual map for every batch series of map Effective Date of By-Law C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary By-Law Number Legend Railway Lake Map Reference Number ‡ ‡

City of Hamilton Zoning By-Law 05-200

Hamilton

SCALE 1: 3,332

MAP 1083 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

TS HT8 TRAST

AD JJIHLNOS

BBNCE PARK DR

211

E01

MAP 1038

543

WEST 2ND ST

Effective Date of By-Law			
By-Law Number			
lap Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Lake

061

183

128

TS H12 TSH3T

901 911

MAP 1085

TS HT6 TSA3

EAST 8TH ST

EAST 5TH ST

121 EAST 4TH ST

633

E801 9AM

O UPPER JAMES ST

505 961 881

921 921

111

02

PRINCE GEORGE AV

901 801

49

Lg.

TS HT6 TSA3

TS HT8 TRAST

TS HTT TZAB

TSHT6THST

507

221

MAP 1133

09_L

152

WARREWAY

90

181

153

FENNELL AVE

651

636 640

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1084 of Schedule 'A'

EAST 13TH ST

EAST 11TH ST

501

Refer to By-Law No. 6593

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

EAST 16TH ST

563

523

584

UPPER WELLINGTON ST

238 536

2542

524

MAP 1086

153

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway	
	#		ł•				Ī	

EAST 15TH ST

EAST 13TH ST

EAST 12TH ST

8

EAST 11TH ST

192

4801 9AM

UPPER WENTWORTH ST

241

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1085 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake
	#		} •			

Zoning Bo	C.A. Regu	Lake	Railway	
			‡ ‡	

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1086 of Schedule 'A'

UPPER SHERMAN AV EAST 27TH ST EAST 26TH ST EAST 25TH ST MAP 1135 T&T&T&T&A3 TS HT61 TSA3 3801 **9AM**

MAP 1087

Hamilton

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

By-Law											Ø	
						Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	
						_	*** Spec	ploH #	• • • • • • • • • • • • • • • • • • •	Zoni	C.A.	
]						•			

Note: Features in the Legend may not appear in each individual map for every batch series of map

H + Railway

Lake

MAP 1089 of Schedule 'A'

SCALE 1: 3,332

	MAP 1090
1356	
2 PC 1	88 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8
	HUXIEX OF THE PROPERTY OF THE
83 69 69	7 2 2 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8
SUN GHO	WEXPC
p821 88	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2
765 16 88 12 15 88 8	
S VA NOTHOUGH	
\$125 \ \@\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	
S VA MAHA99	\$\\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\ \\
\$\\ \alpha\\\ \alpha\\\\ \alpha\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	HOUGH AV S
\(\frac{1}{2}\)\(\frac{1}\)\(\frac{1}{2}\)\(\frac{1}{2}\)\(\frac{1}{2}\)\(\frac{1}{2}\)\(\frac{1}{2}\)\(\frac{1}{2}\)\(\frac{1}\)\(\frac{1}\)\(\frac{1}\)\(\frac{1}\)\(\frac{1}\)\(\frac{1}\)\(\frac{1}\)\(\frac{1}\)\(\	
15 SES 15	A STATE OF TAXABO TIGHT
059 88 7 19 15 15 15 15 15 15 15 15 15 15 15 15 15	
85 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	1997
11c pls	
	88 7 88 7 88 8 8 8 8 8 8 8 8 8 8 8 8 8
600	
10s	
	PARK WAS SWA WAS A LEGIT THE TOTAL OF THE SWA WAS AS A LEGIT THE SWA WAS AS A LEGIT TO THE SWA WAS A LEGIT TO THE
89p 8 R N 8 8 N N	
8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	EDGEWONI
\$ 18 AVI	
09p & & & & & & & & & & & & & & & & & & &	
755 16 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	
90bi 30bi 30bi 30bi 30bi 30bi 30bi 30bi 3	
8001 800	\$\frac{1}{2}\limits \frac{1}{2}\limits \frac{1}{2}\
186	96
GROSVENOD CROSVENOD	
\$ 606 996	
8 5 5 8 8 5 14 5 8 8 496 196 196 196 196 196 196 196 196 196 1	8801 qAM
	OOUP CLAM

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

Lake

H + Railway

Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 1090 of Schedule 'A'

	MAP 1091	
	\$\\ \frac{\partial \text{\ti}\text{\texict{\texi\text{\tett{\texict{\text{\text{\text{\texi}\text{\text{\text{\texit{\text{\texitex{\texict{\texi}\text{\texitet{\text{\text{\texi{\text{\texi}\texit{\text{\text{\text{	
	196 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	
	168 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	
	SELL AV	
	AV ABUSTO OF SOLID TO THE SOLID	
	WER STS AISTON	
	18/8 1/2	
	1691 000g 000g 000g 000g 000g 000g 000g 00	
4		MAP 1139
MAP 1044	\$\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	AP 1
\≥	SNOWAR SNOWAR STORES	Ž
	[2]	
	8 99t	
	S S S S S S S S S S S S S S S S S S S	
	29bl 50bl 50bl 50bl 50bl 50bl 50bl 50bl 50	
	GARSIDE A 1440 1440 1440 1440 1440 1440 1440 14	
	SAV3111 SAV3	
	(10b) (20b)	
	SVAHTNO A A B B B B B B B B B B B B B B B B B	
	1335 1335 1336 1336 1336 1336 1336 1336	
	8801 qAM	

WALTER AV N

VA NOT JOT

STRATHEARNEAU



Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
fap Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake

JEFFERSON AV

WALTER AVS

ROSEWOOD RD

0601 **9AM**

MAP 1092

CS

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1091 of Schedule 'A'

TS DAANABB

NVA AIAGA

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

MAP 1093

OBIOTECE

Lake

EASTVALEPL

NAMOIE

EATON PL

BINGHAM RD

DELENAAVN

NVAAIADA


1601 **4AM**


Railway

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1092 of Schedule 'A'

nd Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURV

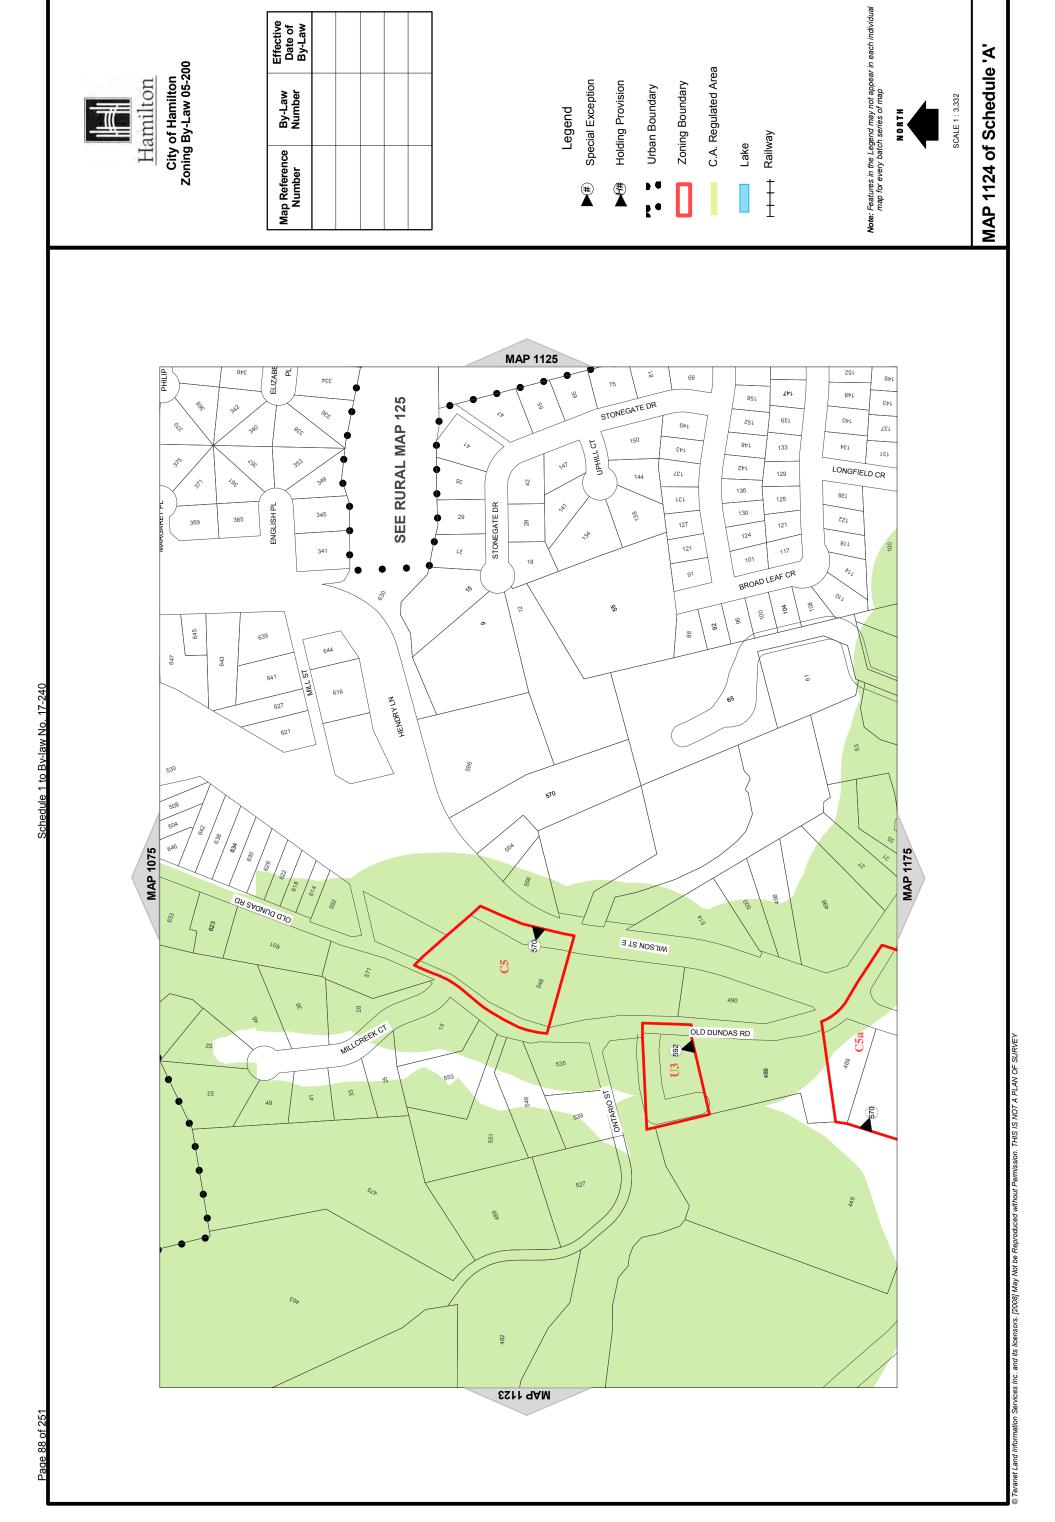

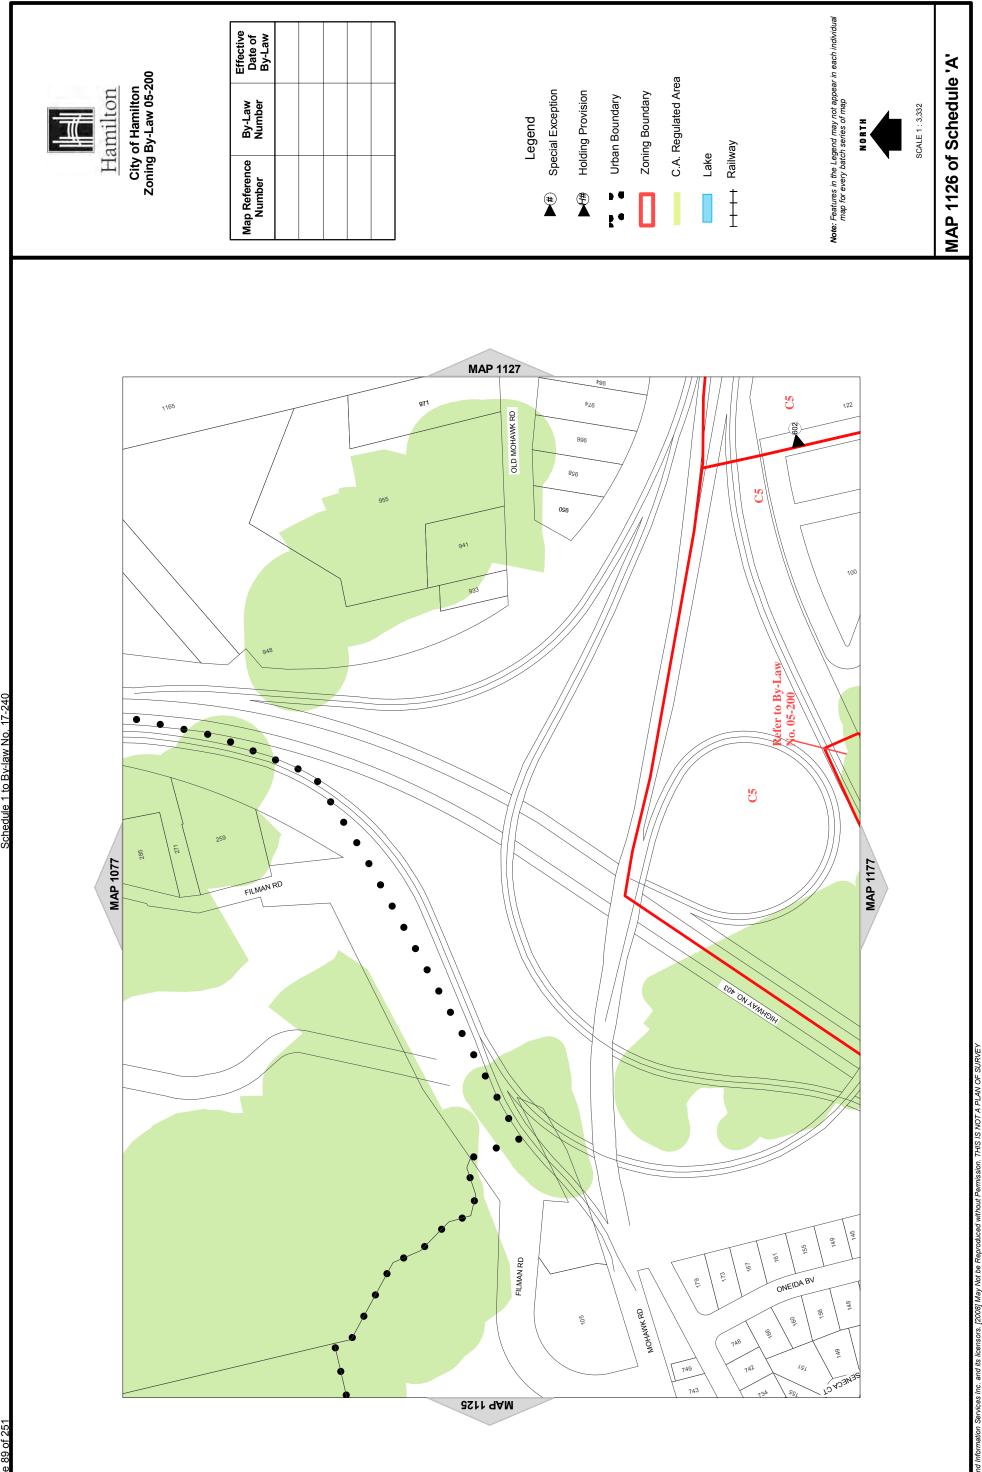

WEST 21ST

WEST 22ND ST

WEST 24TH ST

WEST ZSTH ST

WEST 26TH ST

MAP 1081

City of Hamilton Zoning By-Law 05-200

Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

08₽

MOHAWK RD W

DA NOTHRA

1/2

MAP 1131

LEEWARD PL

BUCKINGHAM DR

6211 9AM

£9

9ç

90€

9₺

ÞG

TS HTAAD

BEENTANCL

TO ARTRA

0€₽

C2

BALA PL

CLIFTON BOWNS RD

þ

PURVELL DR

62p

MAP 1181

Lake

Railway

Note: Features in the Legend may not appear in each individual map for every batch series of map

DARLINGTON DR

MAP 1130 of Schedule 'A'



Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

27.4

COLUMBIA DR

Þ91

29Į

DELMAR DR

ÞZL

MAP 1082

HNDSONCT

£9₁

49_L

E21

WEST 19TH ST

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake
	#		r•			

%

₹5

E21

NA SUD HAM


MAP 1132

LEADALE PL

ÞZL

*⊅*61

BRIARWOOD CR



Þ91

WEST 15TH ST

WEST 16TH ST

WEST 17TH ST

WEST 18TH ST

WEST 19TH ST

9₺€

⊅€



271

MOHAWK RD W

287 291

SOUTHLEA DR

MAP 1182

MILIBANK

6¢E

∠9E ↓9E

ε_Ζε ∠_Ζε

Note: Features in the Legend may not appear in each individual map for every batch series of map

98 66

MAP 1131 of Schedule 'A'

35

City of Hamilton Zoning By-Law 05-200

0,00 229

674

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	
	#	#	1 °			

₹

450

121

128

NEVER ST

MAP 1133

WEST 2ND ST

665

MOELROY RD W

WEST 5TH ST

COTTIEBCB

344





Railway İ

Note: Features in the Legend may not appear in each individual map for every batch series of map

192

MAP 1183

⊅9

89

90

RICHWILL RD 25 MAP 1132 of Schedule 'A'

IEII 9AM

16

 $\iota_{\iota_{\boldsymbol{\iota}}}$

SLL

122

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

UPPER WELLINGTON ST

HOONERCR

HOONER CR

WARREN AV

CLARENDONAV

MAP 1084

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	-1
	#		t •			

MAP 1134

119

115

107 103

VA GIVAG

METBONEN DE

Orban Bound	Zoning Boun	C.A. Regulate	-
•			

131

153

TERRACE DR

138 138

WELBOURN DR

TS NOSGOG

AG ANAG

127 | 127 | 127 | 127 |

611

MAP 1184

911

TERRACE DR





Railway İ

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1133 of Schedule 'A'

TS HT81 18A3

TSHTT1 TSA3

875

VA GIVAG

243

FEMNELL AVE

EAST 12TH ST

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Leaend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	
	#		r•				

90


UPPER WENTWORTH ST

MAP 1135


TS HTT1 TSA3

TS HT01 167H ST

EAST 21ST ST



EAST 13TH ST



TS GNSS TSAB

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1134 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	,
	#		} •			

530

MAP 1136







Railway İ Note: Features in the Legend may not appear in each individual map for every batch series of map

828

832

MAP 1135 of Schedule 'A'

	Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY
	© Teranet Land Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A



EAST 35TH ST

25

EAST 34TH ST

00	Effecti Date o By-La
Hamilton City of Hamilton Zoning By-Law 05-200	By-Law Number
City Zoning	Reference

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Date of By-Law							
Number							
Number							

18/8/8/9

448

048

828 832 836

ε_{β8} 6ε₈

EAST 36TH ST

184 188

EAST 41ST ST

UPPER GAGE AV

EAST 39TH ST

TS HT85 TSA3

MAP 1137

T&1&14187.57

450

EAST 36TH ST

EAST 35TH ST

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway
	#		t •				‡

Zoning Bo	C.A. Regul	Lake	Railway	
			İ	

TS GNS 42ND ST



Note: Features in the Legend may not appear in each individual map for every batch series of map

EAST 41ST ST

BOLANCT 520

200

TSHT88TRAST

EAST 37TH ST

EAST 36TH ST

08Z 9ZZ

991 991

MAP 1136 of Schedule 'A'

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake
	#		} •			


Note: Features in the Legend may not appear in each individual map for every batch series of map

H + + Railway

MAP 1137 of Schedule 'A'

SCALE 1: 3,332





	Map Reference Number	By-Law Number	Effective Date of By-Law
<u> </u>			
	_	Legend	
	**************************************	Special Exception	
	Hold	Holding Provision	
	qın N•	Urban Boundary	
	Zon	Zoning Boundary	
	C.A.	C.A. Regulated Area	Ø
	Lake	(I)	

	MAP 1139	
	S AV HIMOM7INAN S AV HIMOM7INAN S AV HIMOM7INAN	
	KENILWORTH ACCESS KENILWORTH AC	
	KESMICK CT 1709 710 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	
	1000 1000 1000 1000 1000 1000 1000 100	
	1591	
MAP 1089	\$\frac{\chi_{\infty}}{\chi_{\infty}}\begin{picture}(100,0) & \text{\$\lambda_{\infty}} & \$\lambda	MAP 1189
	17 AW BROW BI	MAP
	POST 122 122 123 123 123 123 123 123 123 123	
	4 Set Set	
		}
	So So So So So So So So So So So So So S	

SCALE 1:3,332
MAP 1138 of Schedule 'A'

Note: Features in the Legend may not appear in each individual map for every batch series of map

H + Railway

Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

Railway

Note: Features in the Legend may not appear in each individual map for every batch series of map

DA NOTONIJAA

MAP 1139 of Schedule 'A'

^{LUCERNE} AV 5001 340 380 \$161 5161 NORMANDY RD TS AIGY J £64 30/24/24 ROSEDALEAV 847 CLOVERDALE AV CAMERONAVS S NA 3 GISAAS 817 C3 202 902 202 102 202 506 1800 92 22 81 94 22 002 S VA 3TIAWHT20AD 53 089 61 SĮ. 33 8**E11 4M**

MAP 1140

S22 SES

TERMOLI CT

MAP 1091

City of Hamilton Zoning By-Law 05-200

Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

MAP 1141

GLENCARRYAV

SUMMERHILL AV

GLENHOLME AV

S NA GWAYS

HOLMESDALEAV

Lake

Railway

Note: Features in the Legend may not appear in each individual map for every batch series of map

5373

MAP 1191

181 183 641

2274

TS TSAUHYAM

2210 2210 270

5500

22

19

HILLSIDEAVS

SCALE 1: 3,332

MAP 1140 of Schedule 'A'

, AO ADAAN 63 59 55 2711 5115 HONEYWELL DR 51 5708 CRYSTAL CT 47 43 39 35 31 RIVERCREST RD 0/ Schedule 1 to By-law No. 17-240 BOW VALLEY DR / _& , MAP 1095 201203205207 209 211213215 225 227229231 233 235237 239 EASTVIEWAV LAKEALN 7 911 251 981 211 901 \$01 \$01 \$01 BARLAKEAU 179 73 98 157 **DELAWANA DR** BARLAKEAV **E411 9AM**

2575

 C_2

City of Hamilton Zoning By-Law 05-200

Hamilton

Effective Date of By-Law C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary By-Law Number Legend Railway Lake Map Reference Number Ī

MAP 1145

RIVERBANK CT

99

\$

92

12 67

63

59

19

15

123 119

52

48

28

24

20

16

111 115

TEROME CR

Note: Features in the Legend may not appear in each individual map for every batch series of map

LÞL

JASON CT

VA SNIAA

30

EVELYNST

145 141

144

45

38

24

20

159 155

166 170 170 174

158 154 150 **MAP 1195**

HUCKLEBERRY DR

31

27

23

19

20

16

137 133

SCALE 1: 3,332

MAP 1144 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200 Hamilton

96_L

ARVINAV

MAP 1096

350

5185

5229

2783

5755

BELLMANOR ST

2875

62 64

SEABROOKE DR

PALI 9AM

355

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Number	er Number	Date of By-Law
	Legend	
#	Special Exception	uc
	Holding Provision	uc
r •	Urban Boundary	>
	Zoning Boundary	<u>~</u>
	C.A. Regulated Area	Area

MAP 1146 Nap 1146 Nap 2120 Nap 3170112	7
and shall be seen to see the second see that the second see the second see the second	
802 815-802 412 412 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	/
905 015 965 015 015 015 015 015 015 015 015 015 01	
300	%
CELTIC DR	
262 262 262 262 262 262 262 262 262 262	
00c 115 9 8 N P RCZ	
161	
881 882 15 0 41E 150 0 1	
SOL SURPHAND	8
SEE SEE 14 SO SO SO SO SO SO SO SO SO SO SO SO SO	
000 000 000 000 000 000 000 000 000 00	
390	181
19L 19L 19L 19L 19L 19L 19L 19L 19L 19L	\dashv
1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
	1196
	MAP
\(\sigma\) \(\sigma\)	$\frac{1}{2}$
	//
2682 26 26 26 26 26 26 26 26 26 26 26 26 26	
	/240
2800 100 100 100 100 100 100 100	
	7
136 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	121
12 AONAMALA 201 A	

Note: Features in the Legend may not appear in each individual map for every batch series of map

Railway Lake

‡ ‡

HIGHRIDGEAV

124

 $\iota_{\not \triangleright_L}$

COLCRESTST

FAIRHOLME CT

Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

MAP 1150 01 082 012 NORTH SERVICE RD Schedule 1 to By-law No. 17-240 C2 MAP 1100 **MAP 1200** SOUTH SERVICE RD DA DNAJTIURA SEAMAN ST 74 8411 **9AM**

City of Hamilton Zoning By-Law 05-200 Hamilton By-Law Number

Effective Date of By-Law Map Reference Number

Special Exception Legend

Holding Provision

Urban Boundary

Zoning Boundary

C.A. Regulated Area

Lake

Railway

‡ ‡

Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 1149 of Schedule 'A'

Page 108 of 251


Effective Date of By-Law			
By-Law Number			
Map Reference Number			


Effective Date of By-Law			
By-Law Number			
Map Reference Number			

												Puegend	Special Exception		► Holding Provision		Urban Boundary	Zoning Boundary		C.A. Regulated Area		Lake	- Railway	-
--	--	--	--	--	--	--	--	--	--	--	--	---------	-------------------	--	---------------------	--	----------------	-----------------	--	---------------------	--	------	-----------	---

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1150 of Schedule 'A'

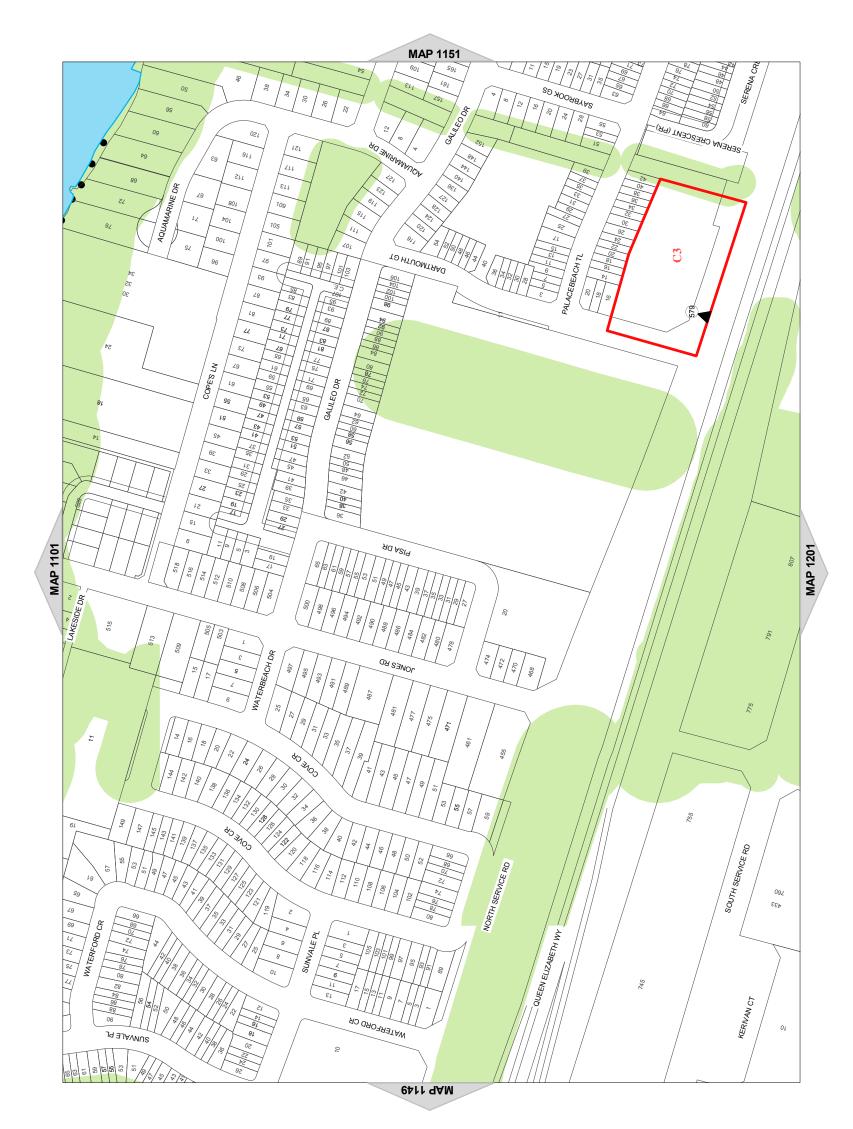

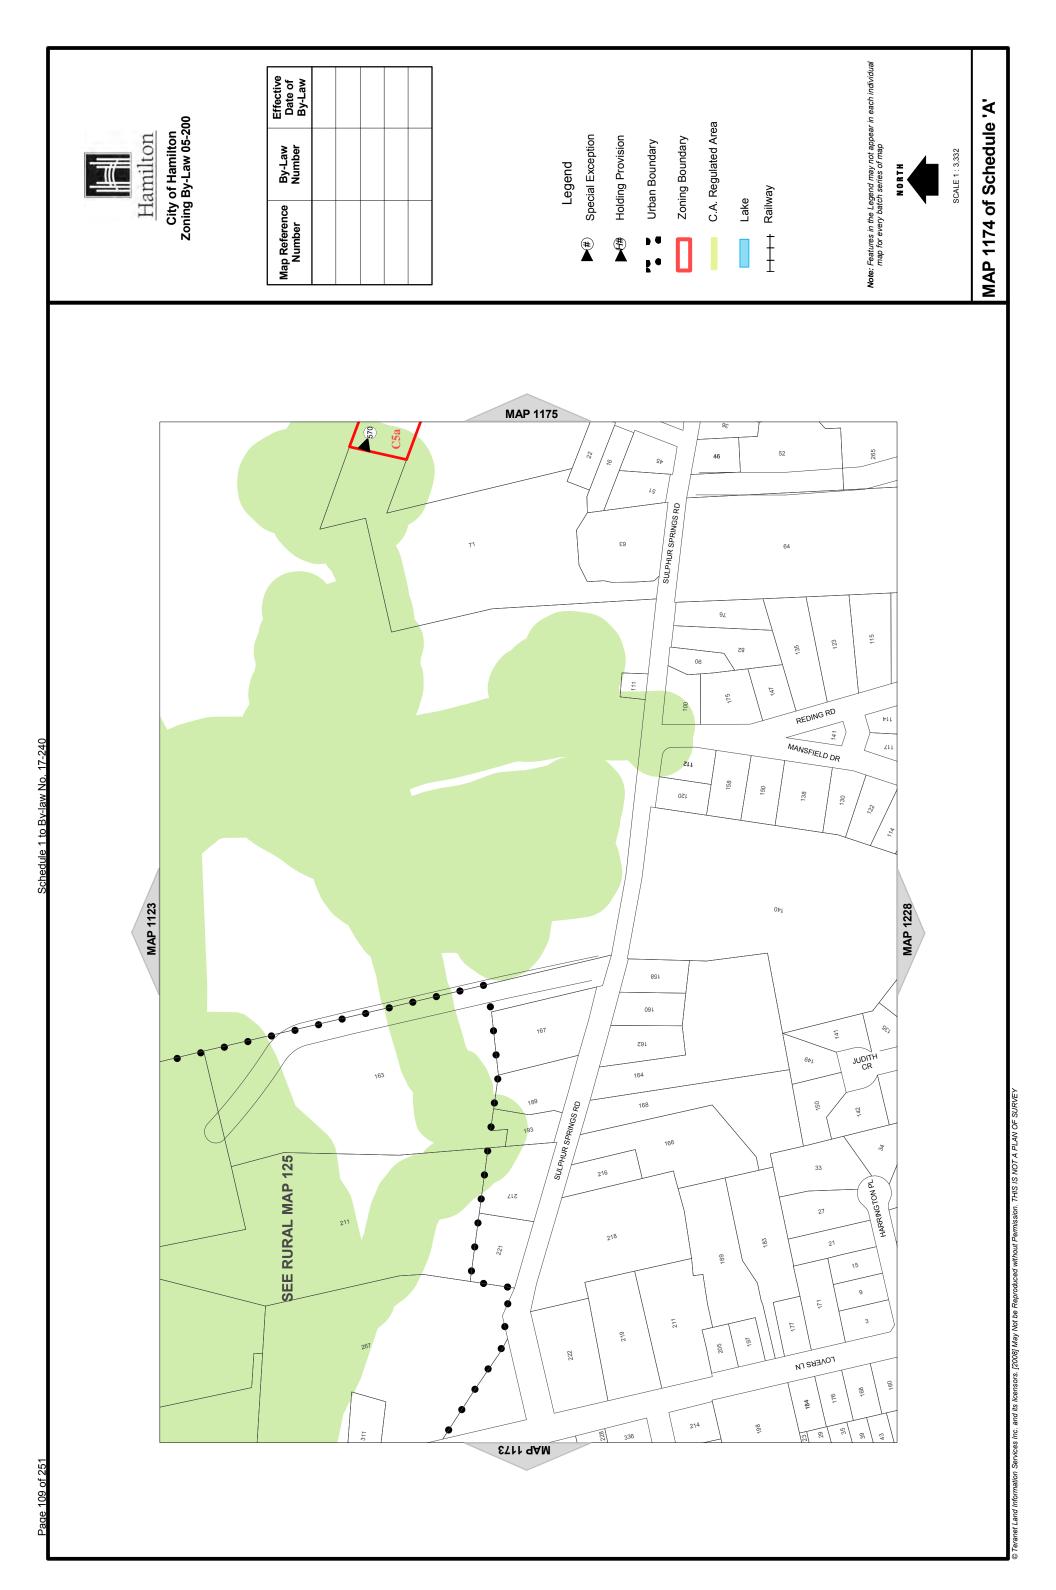

Effective Date of By-Law

Effective Date of By-Law City of Hamilton Zoning By-Law 05-200 Hamilton By-Law Number Map Reference Number


Special Exception Holding Provision Urban Boundary Legend


Zoning Boundary

C.A. Regulated Area

Railway Lake ‡ ‡ Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1176 of Schedule 'A'

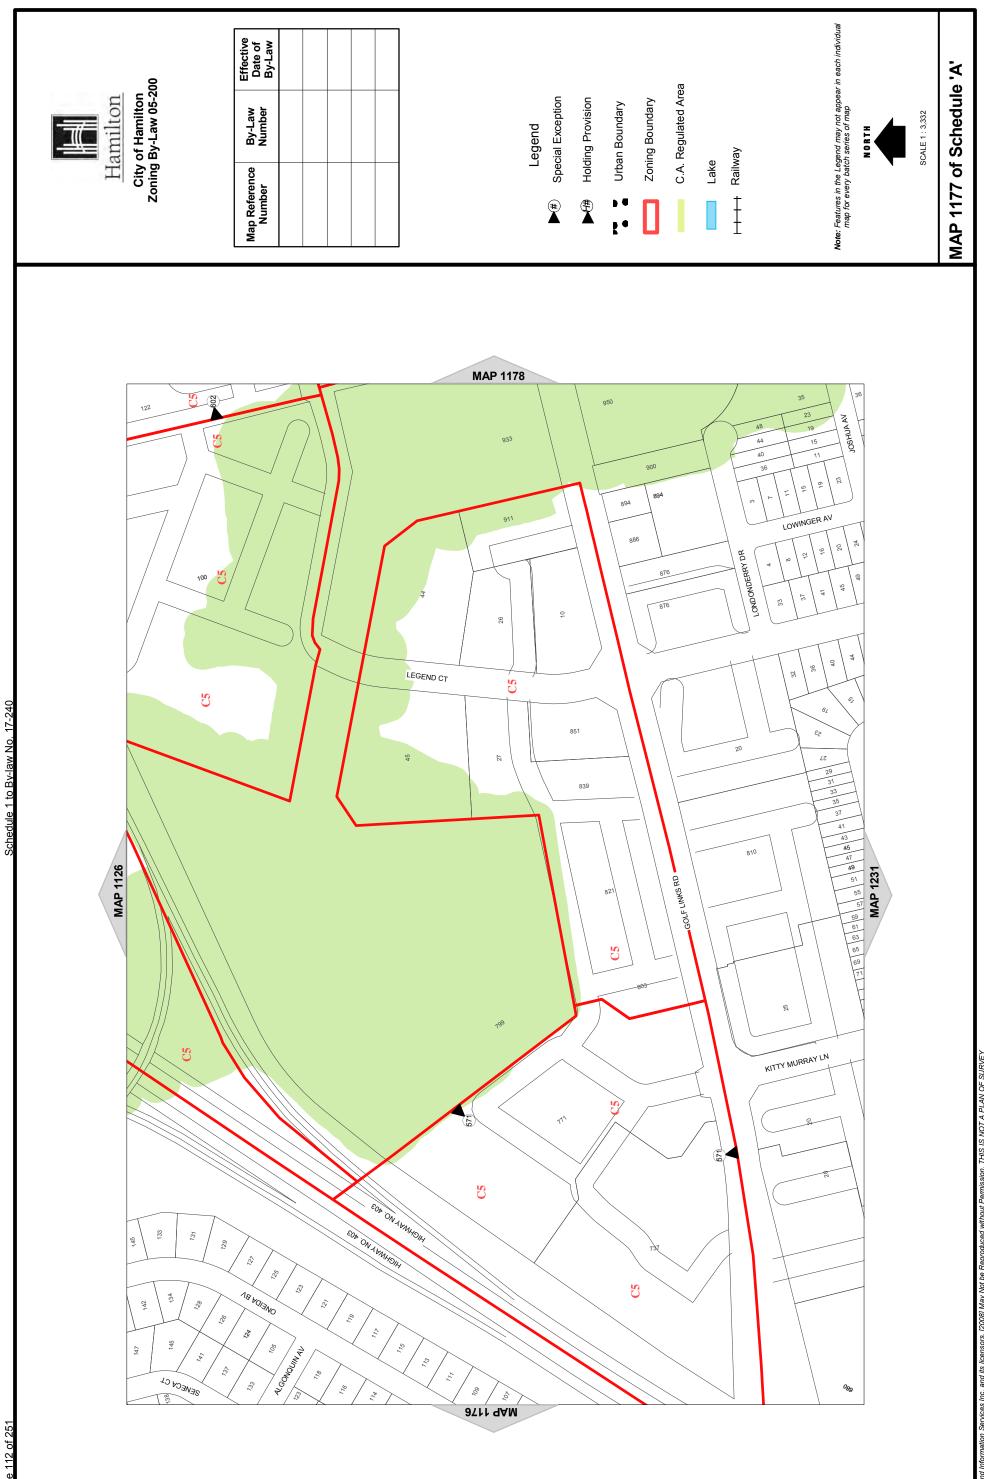

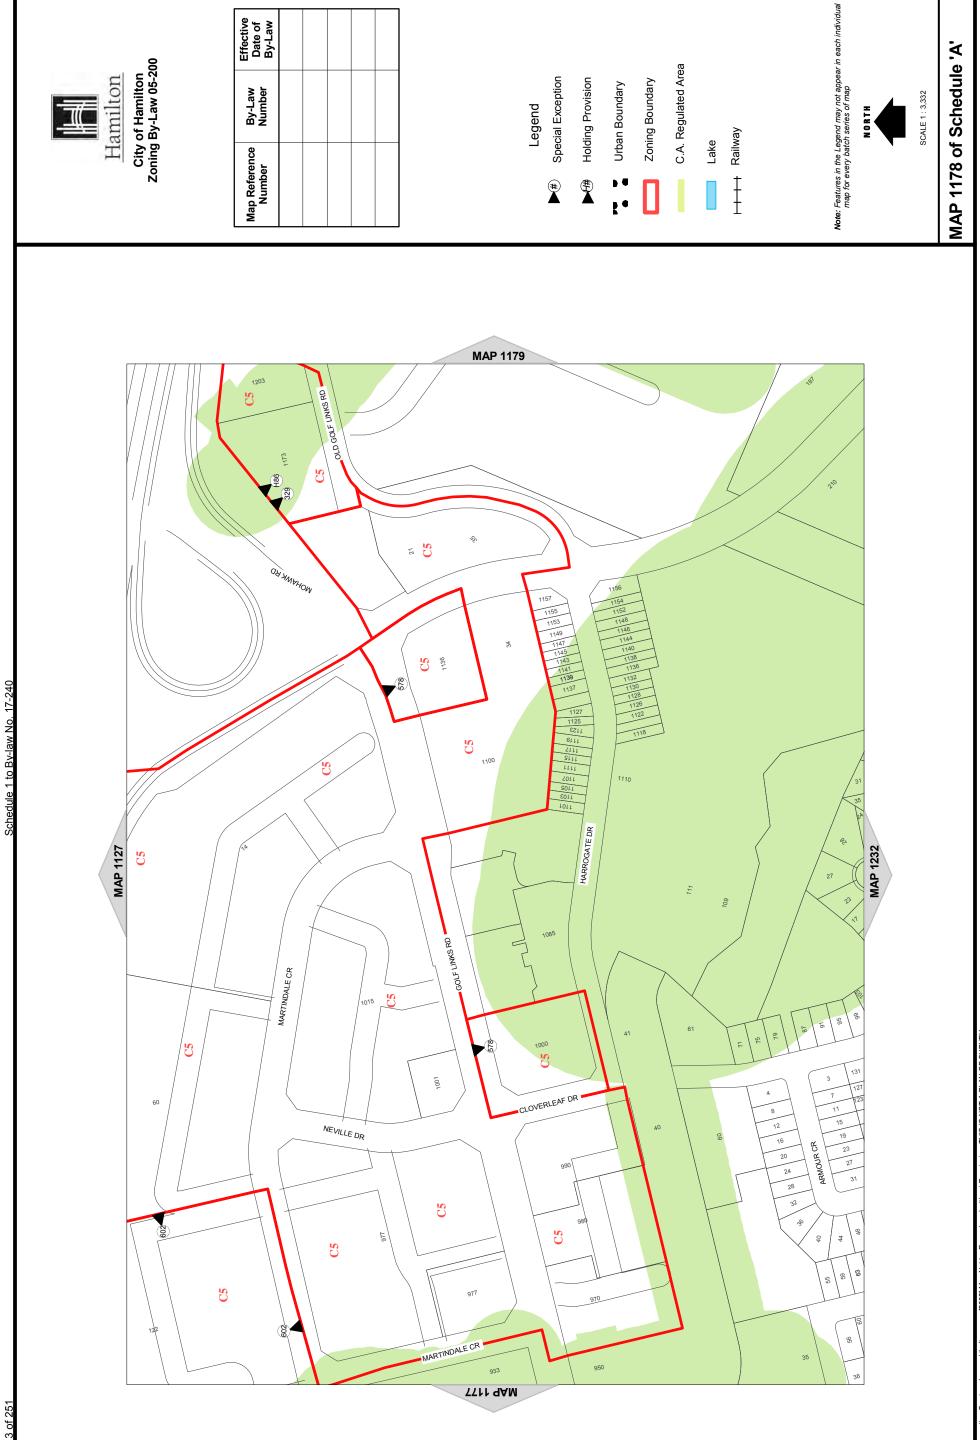

Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVE'



MAGNOLIA DR

14 18 22 26 0ε ε ε ε ε

MAP 1128

LIONSGATE AV

LINCOLN M. ALEXANDER PY WB LINCOLN M. ALEXANDER PY EB

DUNGANNON

MONTEAGLECT

ELENA CT

UPPER HORNING RD

8711 9AM

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake ‡ ‡

MAP 1180

Note: Features in the Legend may not appear in each individual map for every batch series of map

FIRENZE ST

GUILDWOOD DR


NELLIDA CR

\$


NELLIDA CR

 613 615 617

GREENCEDAR DR 10 15 MAP 1179 of Schedule 'A'



Map Reference Number	Dy-Law Number	Date of By-Law
	Legend	
#	Special Exception	
*	Holding Provision	
} •	Urban Boundary	
	Zoning Boundary	
	C.A. Regulated Area	ea

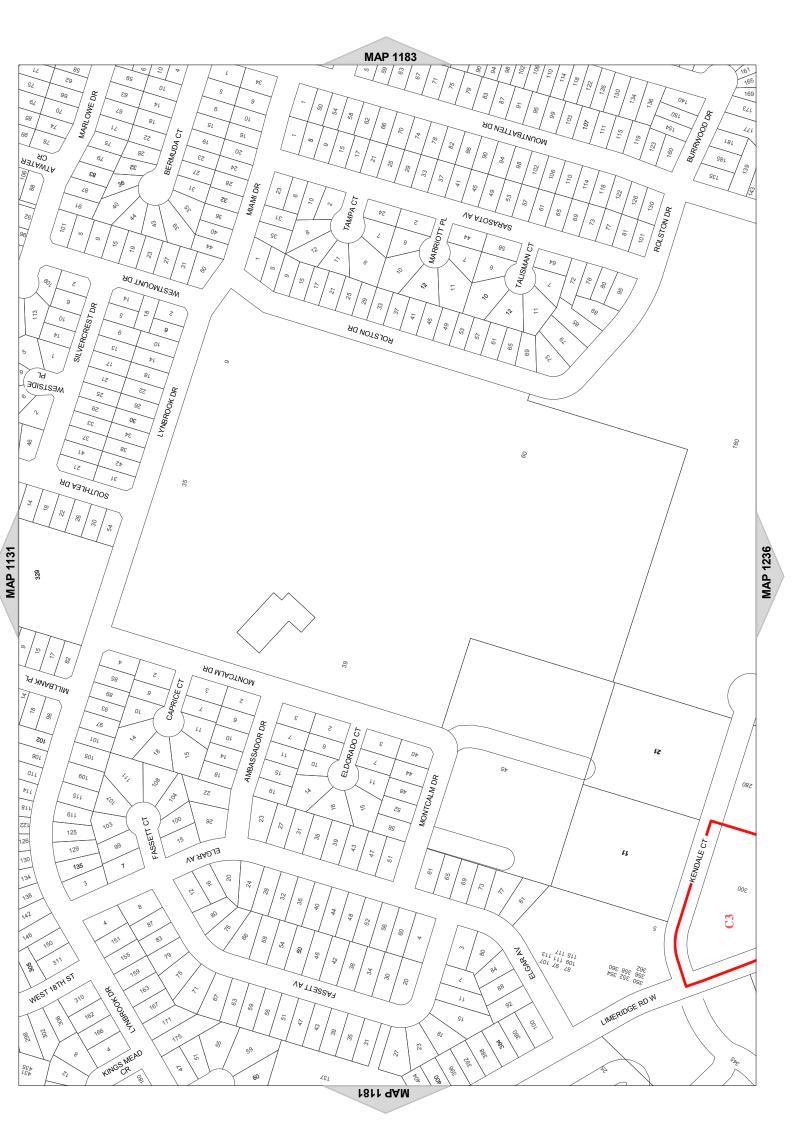

MAP 1182 of Schedule 'A'


Note: Features in the Legend may not appear in each individual map for every batch series of map

Railway Lake

İ

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Number	Jer Jer	Number	Date of By-Law
		Legend	
#	Spe	Special Exception	
	Holo	Holding Provision	
r•	Ü	Urban Boundary	
	Zon	Zoning Boundary	
	C.A.	C.A. Regulated Area	ā
	Lake		

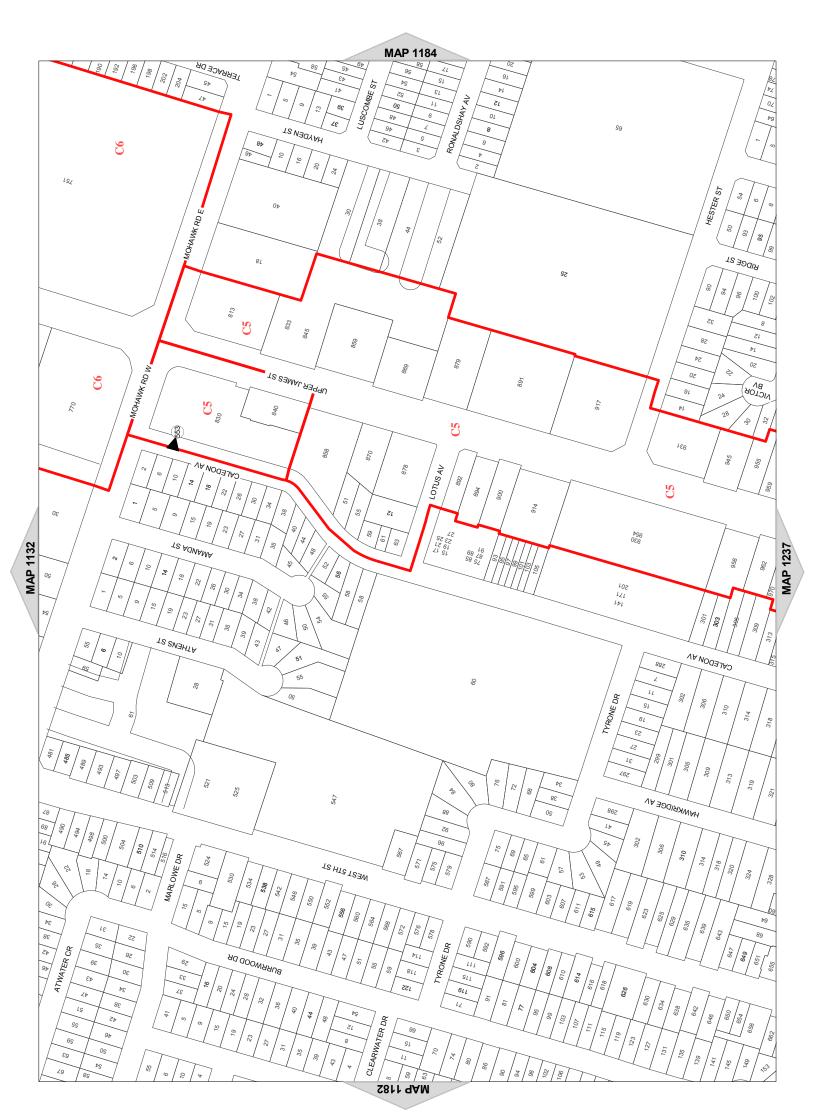

MAP 1183 of Schedule 'A'

SCALE 1: 3,332

Note: Features in the Legend may not appear in each individual map for every batch series of map

H + + Railway

City of Hamilton Zoning By-Law 05-200 Hamilton

VICEROY CT

840

138

MAP 1133

505

TSYHTOROA

TS NOSGOG

AG ANAG

NA NARREN AV

165

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake ‡ ‡

SEVEN OAKS DR

MAP 1185

22

52

80% 204

51

41

35

58

56

18 / 22 /

15

138

211 011

ESTI 9AM

DELEVAN CR

125

152

111

101

VA GINAG

UPPER WELLINGTON ST

Note: Features in the Legend may not appear in each individual map for every batch series of map

KEDMING KD

BLUEBIRD AV

MAP 1238

32 | 34 | 54

91

01

974 768

49

VA DNINNAM

VA YAHZOJANOA 99

DARLENEAV

245

0*þ*[

135

CROWN CT

152

MAP 1184 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

SEVEN OAKS DR

4811 9AM

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

MAP 1186 MAP 11
MP 1239
\$\frac{\cappa_{\text{0}}}{\cappa_{\text{0}}} \begin{array}{cccccccccccccccccccccccccccccccccccc
24 62 62 62 62 62 62 62 62 62 62 62 62 62

Note: Features in the Legend may not appear in each individual map for every batch series of map

Railway Lake

İ

MAP 1185 of Schedule 'A'

SCALE 1: 3,332

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake ‡ ‡

Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 1186 of Schedule 'A'

MAP 1187
958 Cb 88 88 88 88 89 0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
25 GASE JOAN ST. CO. S. S. S. S. S. S. S. S. S. S. S. S. S.
869
282 33 33 33 36 38 8 8 8 8 8 8 8 8 8 8 8 8
33 30 30 30 30 30 30 30 30 30 30 30 30 3
OPPER SHERMAN AN
20 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8
2
20c 991 1 99
25
\$\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\
HEI GA CT
AA 3disyadhib A Si Si Si Si Si Si Si Si Si Si Si Si Si
4 8 4 8888
12 H185 10: 10: 10: 10: 10: 10: 10: 10: 10: 10:
19p
1811 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Solve Solve

2811 9AM

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

90

92

305

306

EE6 5

538

MAP 1136

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

EAST 45TH ST

Þ02

200

EAST 38TH ST

MAP 1188

1050

Ce Ce

EAST 37TH ST

Lake

Railway

HELMAAV

TS HT 44 TH ST

TS 0984 434D ST

737

[%] C3

335

UPPER GAGE AV

738

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1187 of Schedule 'A'

745 745 369 375 379 175 44 747 745 369 375 177 44 46 749 775 379 177 44 46 749 375 376 375 177 44 740 375 377 377 177 177 47 750 376 375 377	MAP 1241
405 407 409 409 409 409 409 409 409 409 409 409	

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake Ī

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1188 of Schedule 'A'

SCALE 1: 3,332

1234	
OESI S	
ORGAN CR	
1218	
2121	
[6] [6]	
0021	
19 6	
99 &	
8811 99 11	
bg SI	
0g 21 6E	
23 44 AV	
29 40 00 33 33 14 Sep	
34 B 15 15 34 S 15 35 S 15 S 15 S 15 S 15 S 15 S 15 S	
co co co	
SI SI	
11	
6	
\$	242
	. 4
No.	4
BRENTWOOD DR	MAP 1
0 0 4 8 0 8	MAP 1
600 600 7 7 8 6 11 7 7 7 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	MAP 1
603 603 615 71 615 70 617 70 617 70 617 70 617 70 617 70 70 70 70 70 70 70 70 70 70 70 70 70	MAP 1
85 AWATO A34040 S	MAP 1
000 010 000 000 000 000 000 000 000 000	MAP 1
150 606 608 608 609 609 609 609 609 609 609 609 609 609	MAP 1
158 619 619 619 619 619 619 619 619 619 619	MAP 1
FERNWOOD CR 156 634 632 633 631 633 631 633 633 633 633 633 633	MAP 1
153 151 150 000 CR 150	MAP 1
35 153 153 153 154 159 159 159 159 159 159 159 159 159 159	MAP 1
35 157 157 158 606 606 607 170 608 634 683 631 736 638 638 631 633 631 736 638 638 633 633 633 633 633 633 633 6	MAP 1
OASTLEFIELD DR 617 617 617 617 617 617 617 617	MAP 1
CASTLEFIELD DR CASTLEFIELD DR FERWWOOD CR 1750 632 634 633 631 732 28 834 835 835 835 835 835 835 835 835 835 835	MAP 1
27 21 23 24 40 80 80 80 80 80 80 80 80 80 80 80 80 80	MAP 1
23 27 27 38 28 28 28 29 40 60 60 60 60 60 60 60 60 60 60 60 60 60	MAP 1
CASTLEFIELD DR CASTLEFIELD DR	MAP 1
CASTLEFIELD DR 49 66 652 777 777 777 777 776 652 653 777 776 653 653 777 776 653 653 777 776 653 653 777 776 653 653 777 776 653 653 777 776 653 653 777 777 777 777 777 777 777 777 777 7	MAP 1
CASTLEFIELD DR 63	MAP 1
91 150 000 000 000 000 000 000 000 000 00	MAP 1

Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Special Exception Legend

Holding Provision

Urban Boundary

Zoning Boundary

C.A. Regulated Area

Lake

Railway

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1190 of Schedule 'A'

MAP 1191 CHARLOTTEST ERIN AV ROSSEAU RD CHARLOTTE ST ROSSEAU RD 537 545 474 IPSWICH RD 821 ÞZI 29_L AINTREE CT 041 ABERFOYLE AV Stl 841 BEVAN CT 041 141 TS AIGY J 611 ERINDALEAV 150 511 811 131 RATCLIFFECT 001 STEWARTDALEAU



Effective Date of By-Law			
By-Law Number			
Map Reference Number			

238

PARKDALEAVS

999

^LAWRENCE RD

DA NITAAM

208 500

351

215

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake

38

CLERICOCT

RED HILL VALLEY PY

MOUNT ALBION RD

65

MAP 1245

MAP 1192

SINCLAIRCT

418

DA NITAAM

0611 9AM

ELAINE CT

385

SYLVIAAV

15

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1191 of Schedule 'A'

SCALE 1: 3,332

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

AG WOANIAA

SUNRISE DR

GAILMONT DR

S DA 77UATTOA

MAP 1141

TO TNAYAB

€\$

6E

10 131 No. 1111 Cold

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway
	#	*	r.				‡

MAP 1193

AD TNOMIND

Sp

21

ÞÞ

STARAV

STARLIGHT CT

79

ÞG

30 50

DA NOIBJA TNUOM

ORPHIR RD

81

0⊅

حع

1611 9AM

Note: Features in the Legend may not appear in each individual map for every batch series of map

TEON

S625

MAP 1246

JIKKIDGE KD

MAP 1192 of Schedule 'A'



GLENBURNCT

6 6 10 8 14 12 18 16 24 22 34 30

188

TS TTOOS!

488

458

262 800

81

MAP 1143

BINERDALE DR

QUEENSTON RD

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

	Effective Date of By-Law			
	By-Law Number			
-	Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway	
	#		t •				Ī	

SECOND STN

6g 19

29

Eerr GAM

CENTENNIAL PYS

58 83 85

82

Note: Features in the Legend may not appear in each individual map for every batch series of map

NTS TSAIA

NALLEY DR

MAP 1248

ÞG

TS NAIVIN

09

EW DR

VA BUNARD

⊅9


63

٤2

2

IRENEAV

MAP 1194 of Schedule 'A'

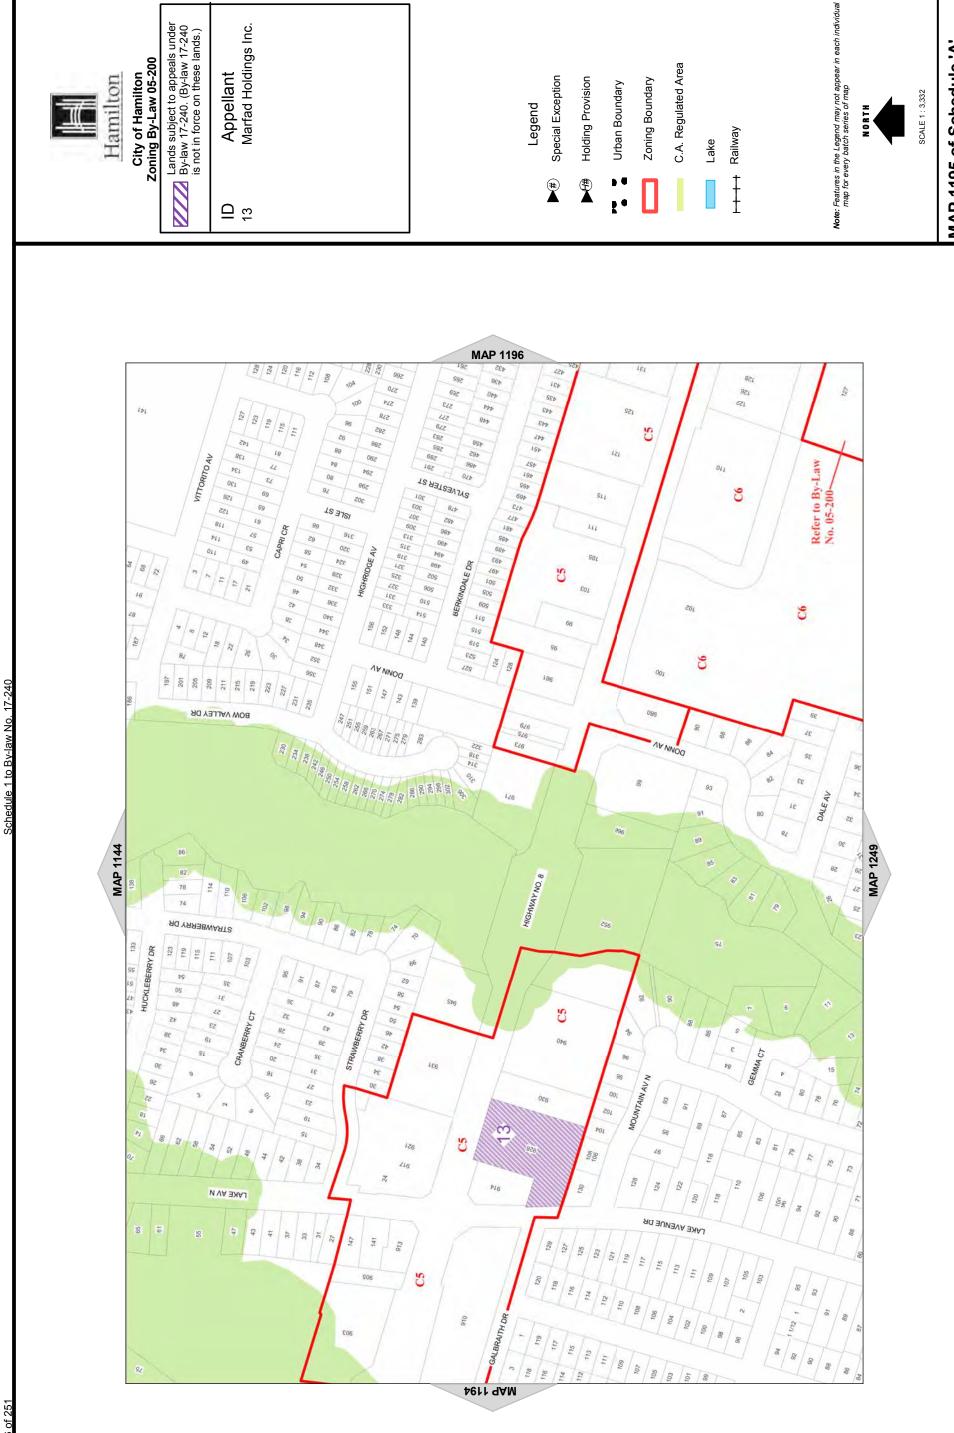

MAP 1195 of Schedule 'A'

Hamilton

City of Hamilton Zoning By-Law 05-200

MAP 1145

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

					-egend	cial Exception	Holding Provision
					7	**************************************	DIOH #
						Puegend	S S

 MAP 1197

BLENHEIM DR

€\$

\$p | p2|

BERKINDALE DR

422 824 **9611 dVM**

68_L

£21

€⊅

\$

DA MAHAUD


\$

CS

CHESTER RD

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway	
	#		r •				İ	

TINCOTN BD



53>

50€ 50¢

ÞζĹ

⊅9_L

Note: Features in the Legend may not appear in each individual map for every batch series of map

02/

NICK YD

MAP 1250

\$21 \$21

CS

091 25 25

Refer to By-Law

68_L

£81

MAP 1196 of Schedule 'A'

340

331

330 328 326 322

327

MAP 1147

328

325

MARGARET AV

319

C2

58

413

HALE ST

324

LEASIDE AV

BARTONST

455

430

292

WITTEN KD

NA TERABRAN

287

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

	į	Urban Boundary	ovisio	Special Exception	Legend
tion ary	5	dary	Holding Provision	eption	

MAP 1199

TS NATIAUA

59

272

267

271

81

273 | 521

DEERHURST RD

7911 9AM

HOOOMNAT

<1

251

245

C.A. Regulated Area Zoning Boundary Lake

Railway

MACINTOSH DR

252

249

392

WORSLEY ST

383

382

/ % / (2)

∠8€ 385

383

278

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1198 of Schedule 'A'

SCALE 1: 3,332

Effective Date of By-Law

> By-Law Number

> Map Reference Number

City of Hamilton Zoning By-Law 05-200

Hamilton

Legend
Special Exception
Holding Provision
Urban Boundary

Zoning Boundary

C.A. Regulated Area

Lake

Lake

MAP 1200

90

CHELSEA CR

MAP 1253

WETEOR BV

HEWITSON RD

73

276

029

34

₽

17

NORTH


Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1 : 3,332

MAP 1199 of Schedule 'A'



Land Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOTA PLAN OF SURVEY

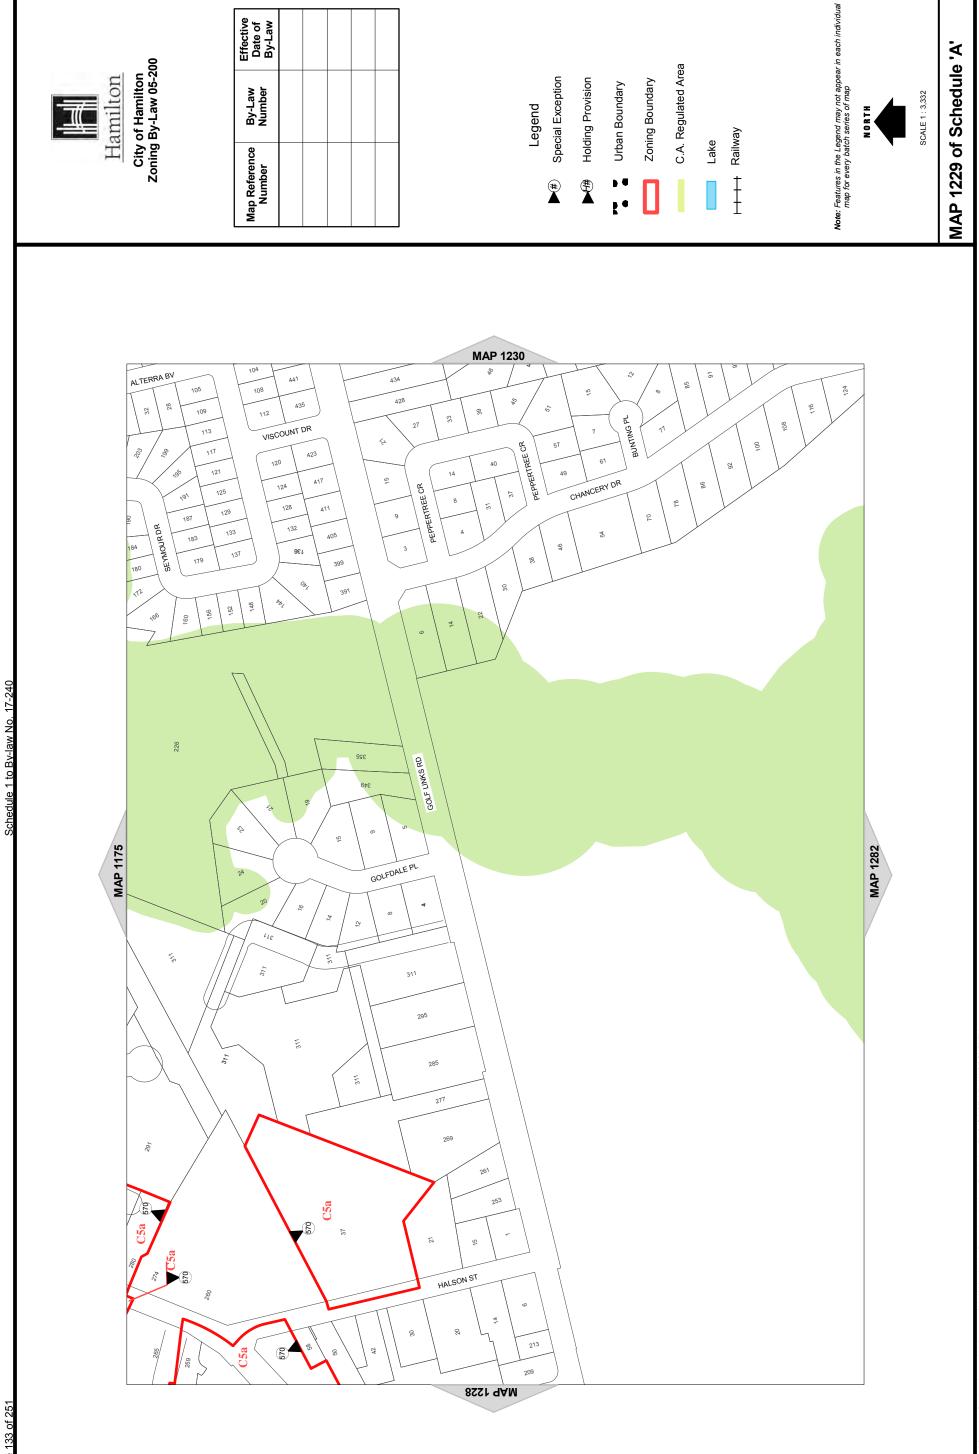

ervices Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY



ARGON CT)

MAP 1180

30 34 GILCREST ST

\$

SI

GLENHAVEN DR

SONESTO CT

GUILDWOOD DR

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			


	Number	r Number	per	By-Law
Ť				
Ť				
Ť				
		Legend		
	#	Special Exception	ption	
		Holding Provision	rision	
	r•	Urban Boundary	dary	
		Zoning Boundary	ıdary	
		C.A. Regulated Area	ed Are	æ

MAP 1235

GLEN ARMS ST

43

GLENAYR ST



GILLARD ST

VESPARI PL

19

99 69

GURNETTGT

\Z\ 924

AU HEBETH DR

6₂/

ÞĮ

81 55 56

CEDARLAWN CT

348

8521 9AM

\$01

150



308
312
316
026
PZC
PZC
PZC
PCC
PCC
PCC
PPC

\$8E 68E

S 089

63



Effective Date of By-Law			
By-Law Number			
Map Reference Number			

LINCONNI, ALEXANDER PY NB

- LINCOLVIN. ALEXANDER PY EB

> 158 162 166

43

GRETNA CT

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway
	#		! •				† †

MAP 1236

GOLDEN ORCHARD DR

GRANBY CT

GOLDEN ORCHARD DR

GTEN EDEN CL

29¢ 99¢ 470 41^A

GOLDEN ORCHARD DR

TS HTAAD

ELSA CT

200

 \mathbb{S}

220

4521 **9AM**

lg

453

68¢ 8¢¢ 2¢¢



250

30

50

GERRICK CT

DUNCAIRN CR

CHENOBIE HD

BRICADOON DR

53

61

GREYFRIAR DR

CRANBROOK DR

15

DUNCAIRN CT

55

Note: Features in the Legend may not appear in each individual map for every batch series of map

08 | 92 | 22 | 89 |

22

GLENVIEW CT

MAP 1288

53

6l 15

MAP 1235 of Schedule 'A'



6*þ*[

MAP 1182

351

AG NATTABTNUOM

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

ELKWOOD DR

56

500

\$\frac{\psi_g}{8g} \\ 62 \\ \end{align*

61

156 130

134

145

511

551

515

525

528

243

523

528

Z82

 \mathbb{S}

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway	
	#		ļ.				Ī	

MAP 1237

911

123

LINCOLNIM, ALEXANDER PY VIB LINCOLN NI ALEXANDER PY EB

PIPER PL

3521 9AM

132


6£1 €\$1

201

152

36 8

223



803

810

287

WATERBERRY TL

APPLEBLOSSOM DR

DUNCAIRN CR

08

WEST 5TH ST

826

63

MAP 1289



Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1236 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Date of By-Law			
By-Law Number			Legend Special Exception
Map Kererence Number			ands ##

MAP 1238	
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	
2	
118 PURDY CR	
96 101 105 10 10 10 10 10 10 10 10 10 10 10 10 10	
80 00 00 00 00 00 00 00 00 00 00 00 00 0	
41	
149 191 191 191 191 191 191 191 191 191	
100 100 100 100 100 100 100 100 100 100	
SS TS SAMAL ASIGNAL PROPERTY AND ACCOUNTS ST. S. S. S. S. S. S. S. S. S. S. S. S. S.	31.
1050 15 1050 1050 1050 1050 1050 1050 1	
CALEBON AV 15 16 17 18 19 19 19 19 19 19 19 19 19	
bp 68 88 <	
35	
SS SS SS SS SS SS SS SS SS SS SS SS SS	
10 8 69 11 8 9 7 1	
TS HIG IS3M	



Note: Features in the Legend may not appear in each individual map for every batch series of map

C.A. Regulated Area

Railway Lake

İ

Zoning Boundary

Urban Boundary

Holding Provision

#

MAP 1237 of Schedule 'A'

Hamilton

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

MEADOWLARK DR

1042

091

125

1050

DESCHENEAU

170

VA DNINNAM

BEDMING BD

1020

151

132 300/48

 \mathbb{C}

151

⊅01

104

MAP 1239

ÞG

VA ABOUAL

100

N7 QXIBDNIWWNH

CPANE CT

GOLDFINCH RD

⁷¹28 ¹¹22 ¹⁷16

HUNTSVILLE ST

DESCHENEAU

170 22

CRANECT

UPPER WELLINGTON ST

1090

TESI 9AM

1074

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway	
	#	*	r•				Ī	

Note: Features in the Legend may not appear in each individual map for every batch series of map

SPARROWCT

55

265

64

22

FLAMINGO DR

^THRESHER DR

44 ٤2

54

BRYNA AV

121

191

123

6₺[

JAYST

1132

15

PINEWARBLER DR

MAP 1238 of Schedule 'A'

Land Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOTA PLAN OF SI

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

EAST 36TH ST

CARMENAV

90

MOHAWK RD E

CAMEOAV

809

TS HTTS TSA3

90

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

MAP 1241

478

473

CAMEO AV

464

\$09

285

09g

949

749 | 829 | 929

258

61 53 55 55 57 61

56

6521 9AM

٤2

99

283

CAMDEN ST

255

 \mathbb{S}

815

SL

958

£99

199

54

50

496

040

53 61

41

11

CAMELOT DR

BELLINGHAM DR

DEERBORN DA

989

628 *⊅*19 019

55

63

92

62

TITYCSIDE DB

85

87

875

265

ÞG MEAFORD RD

885

LAWFIELD DR

Railway Lake ‡ ‡

FIELDING CR

Note: Features in the Legend may not appear in each individual map for every batch series of map

27 05

CORAL DR 57 2

VA ONAJANA V

JA DAOATAAD

AG NIT SUA

MAP 1240 of Schedule 'A'

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

882

EAST 42ND ST

400

436

450 426 458 62 464 1 89 1

416

MAP 1187

Þ02

EAST 43RD ST

256 722

419

425

TS HT8E TSA3

468

478

0421 **9**AM

454 458

TS HTTE TSA3

54

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake

VA MAHƏNITTON

VA ONAJHSA

ELEVENTHAV

732

457

804 806 810

189

629

269

MAP 1242

Note: Features in the Legend may not appear in each individual map for every batch series of map

101

601

£08 262

61,1

127

181 981

PALMER RD

C3

872

858 / C2 /

999

128

MAP 1241 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

KINGS/EA DR

809

23 /2 12 /23

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	
	#		r •			


MAP 1243

TOBYCR

77 75

-29 -

Lb









TE AAAAAA

BRENTWOOD DR

WINCHESTER BV

91 02

40_L

NAP 1241

KINGSTEA DR

Railway İ

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1242 of Schedule 'A'

5041 QUIGLEYRD VINCENT CT ANGUS RD **ONI**EFE KED MAP 1192 546 254 745 TAM

City of Hamilton Zoning By-Law 05-200

Hamilton

Effective Date of By-Law C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary By-Law Number Legend Railway Lake Map Reference Number ‡

MAP 1247

SCALE 1: 3,332

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1246 of Schedule 'A'

ALBRIGHT RD

Effective Date of By-Law By-Law Number Map Reference Number

City of Hamilton Zoning By-Law 05-200

Hamilton

Special Exception Legend

Holding Provision

Urban Boundary

Zoning Boundary


C.A. Regulated Area

Lake

Railway ‡ ‡ Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 1247 of Schedule 'A'

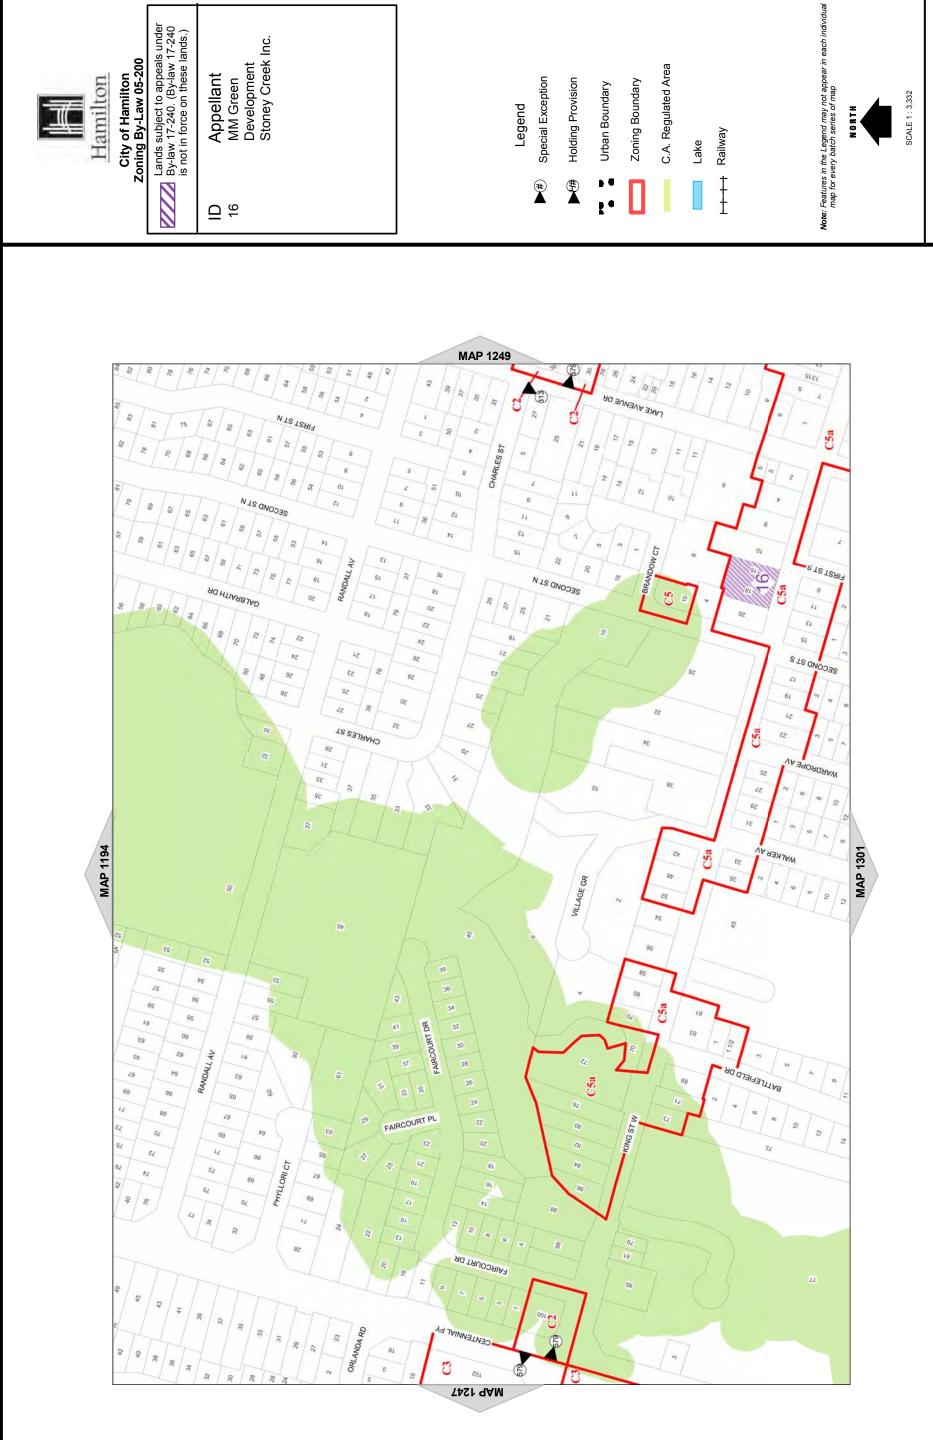

Hamilton

City of Hamilton Zoning By-Law 05-200

MAP 1248 of Schedule 'A'

90 100 201 CANTERBURY AV MAP 1195 58 58 50 VANNOO LAKE AVENUE DR

Map Reference Number	By-Law Number	Effective Date of By-Law

757

City of Hamilton Zoning By-Law 05-200

Hamilton

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake ‡ ‡

CARTWRIGHTAV

58

61

APPLEWOOD AV

58

50

81

VANNOG

22

SS

31

SL

6

Ş

VA GNAJA

8421 **9AM**

MAP 1250

\$

\$

જ 33

20

22

41

42

92 23

EVERGREEN AV

49

99

NVANIATNUOM

Note: Features in the Legend may not appear in each individual map for every batch series of map

23

144

142

140

138 136 AD ATINO8

132

KING STE

130 128

126

124

122

118 116 114

110

108

106

17

Sbl

VANOSWAD

JA AONAM

12

25 24 26 20 NOSE ONLE CT

S 75

GRAYRD

MAP 1249 of Schedule 'A'

SCALE 1: 3,332

Effective Date of By-Law By-Law Number Map Reference Number

City of Hamilton Zoning By-Law 05-200

Hamilton

Special Exception Holding Provision Urban Boundary Legend

MAP 1251

6421 9AM

59₹

Zoning Boundary

C.A. Regulated Area

122/293 162

E21

ROSE CR

KING ST E

LL SL

Lake

Railway Ī Note: Features in the Legend may not appear in each individual map for every batch series of map

CHEEN KD

250 250 218

SCALE 1: 3,332

MAP 1250 of Schedule 'A'

Effective Date of By-Law

MAP 1251 of Schedule 'A'

MAP 1198



City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

| Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil | Pil

TO NATANGS

211

421

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Lake

MAP 1253

GREENING AV

PEACHWOOD CR

453

61Þ

11

9

7 5

VANATAAAS

984

WITTEN BD

1251 GAM

VA TBAAD?

RUSSETCT

201

427

193

390

189

427


425

442 440

208

434

JUNIPER DR



115

 \mathbb{S}

HOWESIDEAU

139

17 NO. 8 .

454

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1252 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Number	e e	Number	Date of By-Law
	_	Legend	
#	Spec	Special Exception	
	Holo	Holding Provision	
! •	Ü	Urban Boundary	
	Zon	Zoning Boundary	
	C.A.	C.A. Regulated Area	æ

Note: Features in the Legend may not appear in each individual map for every batch series of map

Railway

İ

MAP 1253 of Schedule 'A'











and Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOTA PLAN OF SURVEY

Effective Date of By-Law

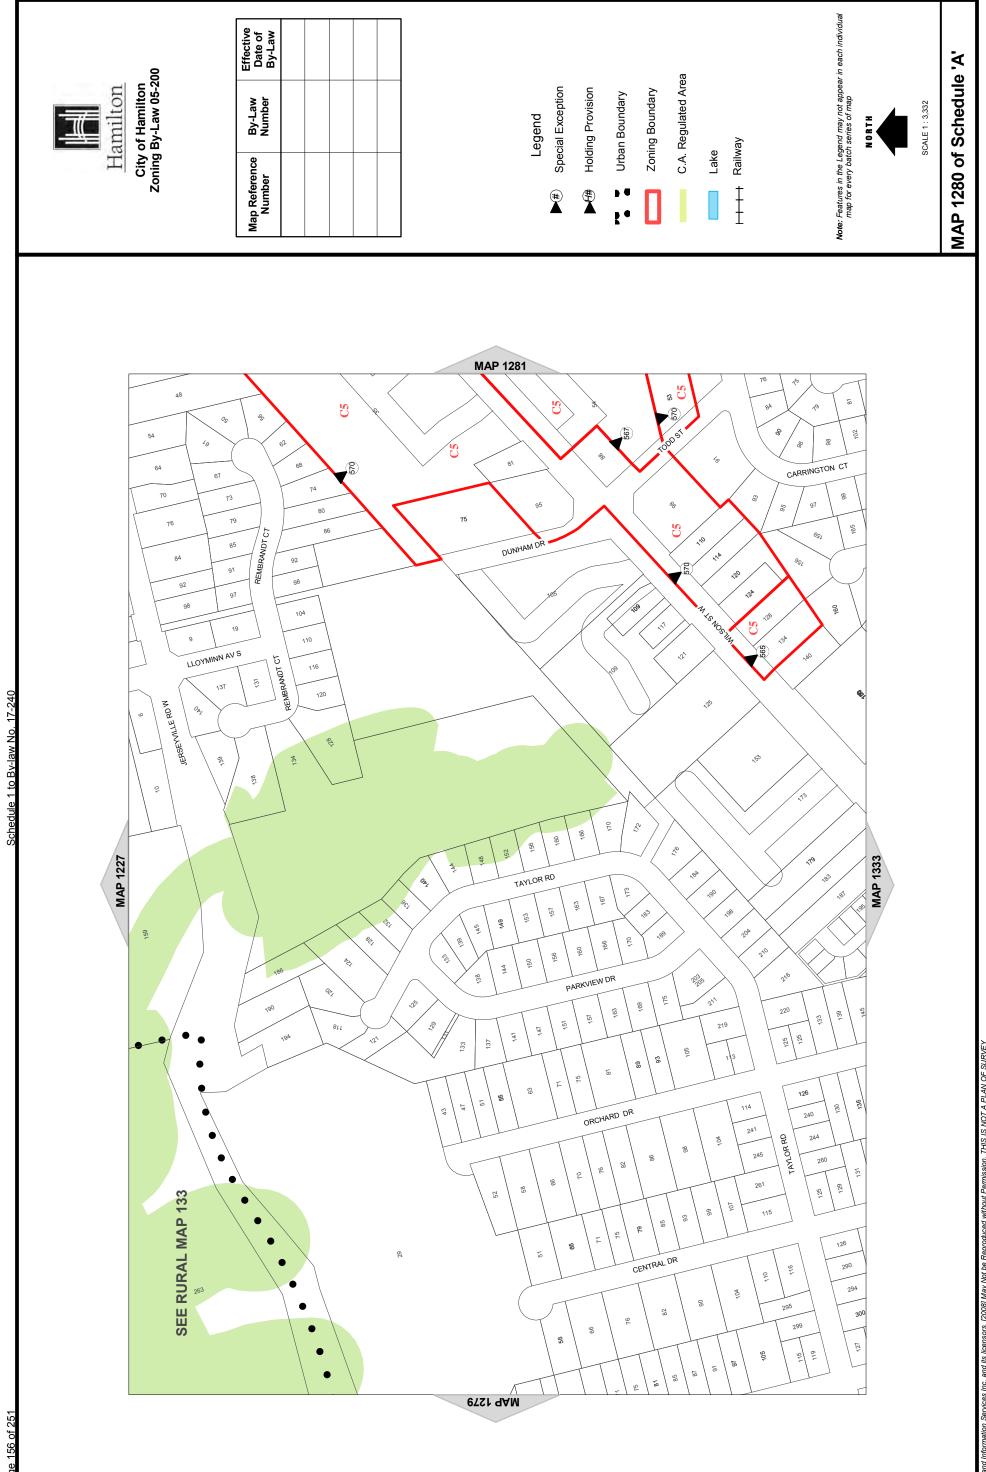

ind Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

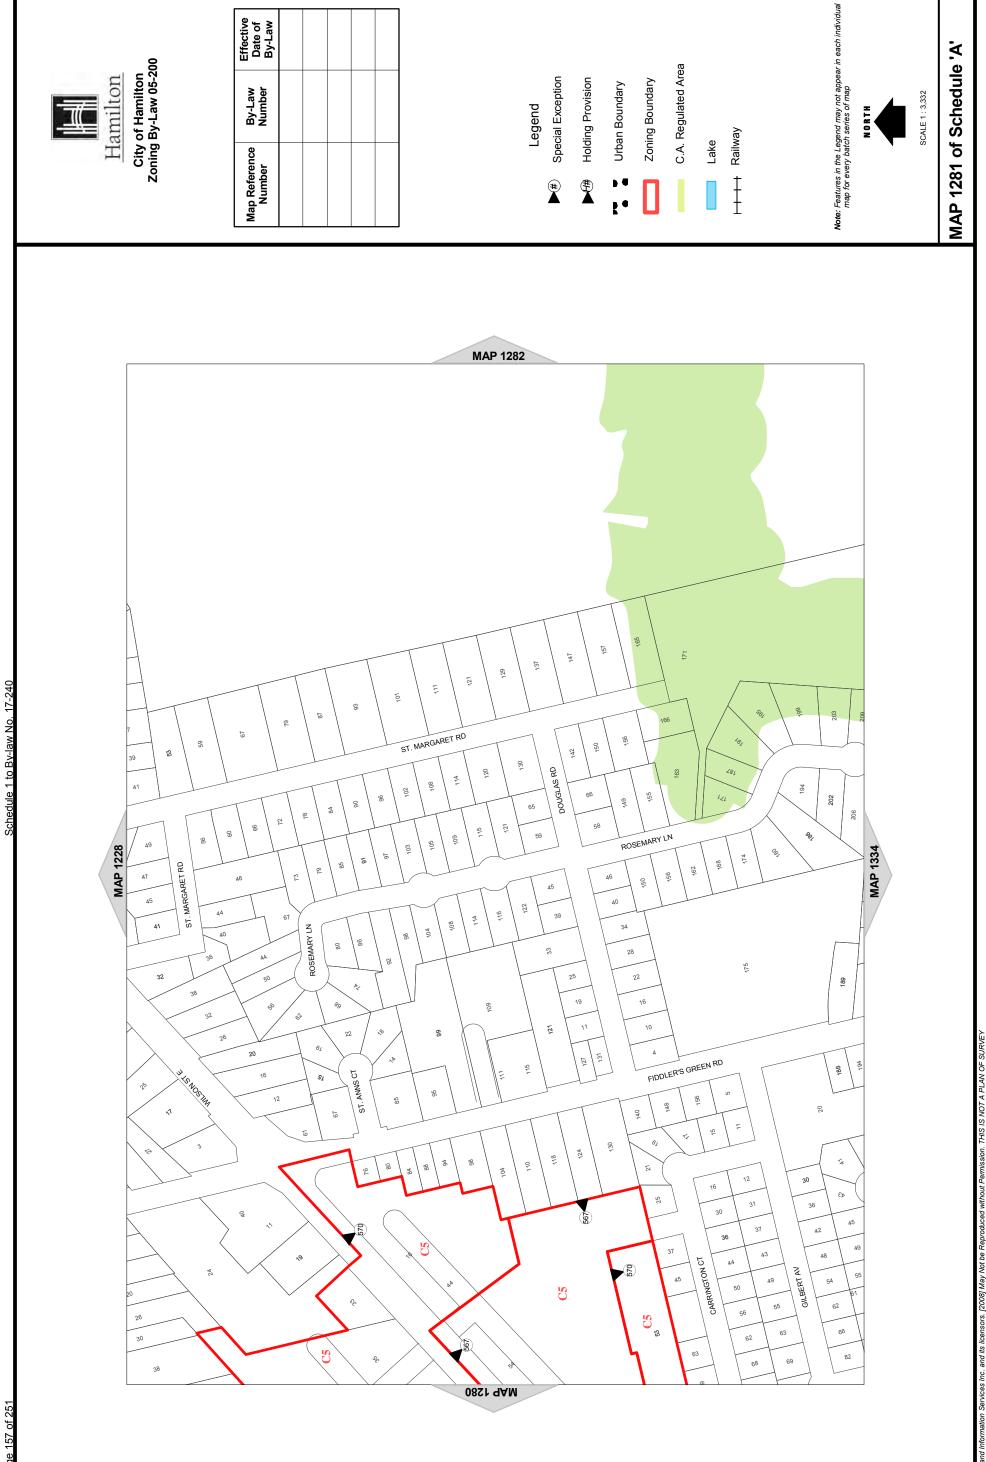

Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

Hamilton
City of Hamilton
Zoning By-Law 05-200
Reference By-Law Date Date Umber Number By-Law

Map Reference By-Law Date of Number By-Law By-Law

Legend
Special Exception

Holding Provision

Urban Boundary

Zoning Boundary

C.A. Regulated Area

Lake

H + + Railway

Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 1284 of Schedule 'A'

Land Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOTA PLAN OF SURV

MAP 1232

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Lake

MAP 1286

GRANDELL DR

15 NOSQ7VNOQ

\$\frac{\gamma_{\gamma_{\gamma}}}{\gamma_{\gamma_{\gamma}}} \frac{\gamma_{\gamma_{\gamma}}}{\gamma_{\gamma_{\gamma}}} \frac{\gamma_{\gamma_{\gamma}}}{\gamma_{\gamma_{\gamma}}} \frac{\gamma_{\gamma_{\gamma}}}{\gamma_{\gamma_{\gamma}}} \frac{\gamma_{\gamma_{\gamma}}}{\gamma_{\gamma_{\gamma}}}} \frac{\gamma_{\gamma_{\gamma}}}{\gamma_{\gamma_{\gamma}}} \frac{\gamma_{\gamma_{\gamma}}}{\gamma_{\gamma_{\gamma}}} \frac{\gamma_{\gamma_{\gamma}}}{\gamma_{\gamma_{\gamma}}} \frac{\gamma_{\gamma_{\gamma}}}{\gamma_{\gamma_{\gamma}}} \frac{\gamma_{\gamma_{\gamma_{\gamma}}}}{\gamma_{\gamma_{\gamma}}} \frac{\gamma_{\gamma_{\gamma}}}{\gamma_{\gamma_{\gamma}}}} \frac{\gamma_{\gamma_{\gamma_{\gamma}}}}{\gamma_{\gamma_{\gamma_{\gamma_{\gamma}}}}} \frac{\gamma_{\gamma_{\gamma_{\gamma}}}}{\gamma_{\gamma_{\gamma_{\gamma_{\gamma}}}}} \frac{\gamma_{\

OLEARY DR

1284 AAM

RAYMOND RD

\frac{\frac{1}{2\pi_1}}{\frac{1}{2\pi_1}}

WOODHOUSE ST

2

51

132 SUTHERLAND CR

20

12

HENDERSON ST

75 71

67

63 3 SUTHERLAND CR

WHITTINGTON DR

WHITTINGTON DR

VINTON RD

Railway Ī Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1285 of Schedule 'A'

Page 160 of 251

City of Hamilton Zoning By-Law 05-200 Hamilton

309 313

STONE CHURCH RD W

87

C3 616

086

AULIEBETH DR

LISAUANE CT

MAP 1234

599

308 312 316 02E *ZE

CRANBROOK DR

Effective Date of	By-Law		
By-Law			
Map Reference			

EEG GEG

Effective Date of By-Law				
By-Law Number				
Map Reference Number				

Pegend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway	
	#		} •				İ	

99

UPPER PARADISE RD

AD HANNAH

1004 1012 1016 1020 1024

STONERIDGECT

9821 **9AM**

69

MAP 1288

ÞĮ

CHRIS CT

SERAFINO CT

EDGEHILL DR

EDGEHILL DR

Aa NWOaNUS

31

VA GNATTANOO

FALKIRK DR

88 8

MCINTOSH AV

OTTAVIANO DR

MAP 1340

83

ANGELINA PL

201

<01

38

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1287 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200

SONATA AV

SPRINGVALLEY CR

MAP 1236

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

	Effective Date of By-Law			
	By-Law Number			
•	Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area
	#		r•		

AG OMISSITAOA

MAP 1290

WEST 5TH ST

TS 3773BEVNA

TS 3773BELLE ST

871

9AM

₽81

CHESTEY ST

APPLESEED

AG NOOGADIAB

9_b[

Þ91

ROSEHILL AV









Railway İ

Note: Features in the Legend may not appear in each individual map for every batch series of map

STONE CHURCH RD W

NO CR

SCALE 1: 3,332

MAP 1289 of Schedule 'A'

MAP 1291 1378 1324 1328 1314 COLINCR DESOTO DR LINCOLVIM ALEXANDER PV WB LIMCOLNIN. ALEXANDER PY EB 811 AZTEC CT 11 TORENZO DR CHARTWELL CL /252 CHARTWELL CL TO ANAL BENJAMIN DR 79 99 MAP 1237 JEREMY ST 63 **C**7 1171 C2 THEODORE DR 1221 7289 1200 C_7 1224 0811 1242 1270 toeBy-Lav

6821 9AM

Effective Date of By-Law City of Hamilton Zoning By-Law 05-200 Hamilton By-Law Number Map Reference Number

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake ‡ Note: Features in the Legend may not appear in each individual map for every batch series of map

8 5

1310

MAP 1290 of Schedule 'A'

SCALE 1: 3,332


Page 163 of 251



Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Number	<u>.</u>	Number	By-Law
	_	Legend	
#	Spe	Special Exception	
	Holo	Holding Provision	
} •	C C	Urban Boundary	
	Zon	Zoning Boundary	
	C.A	C.A. Regulated Area	æ

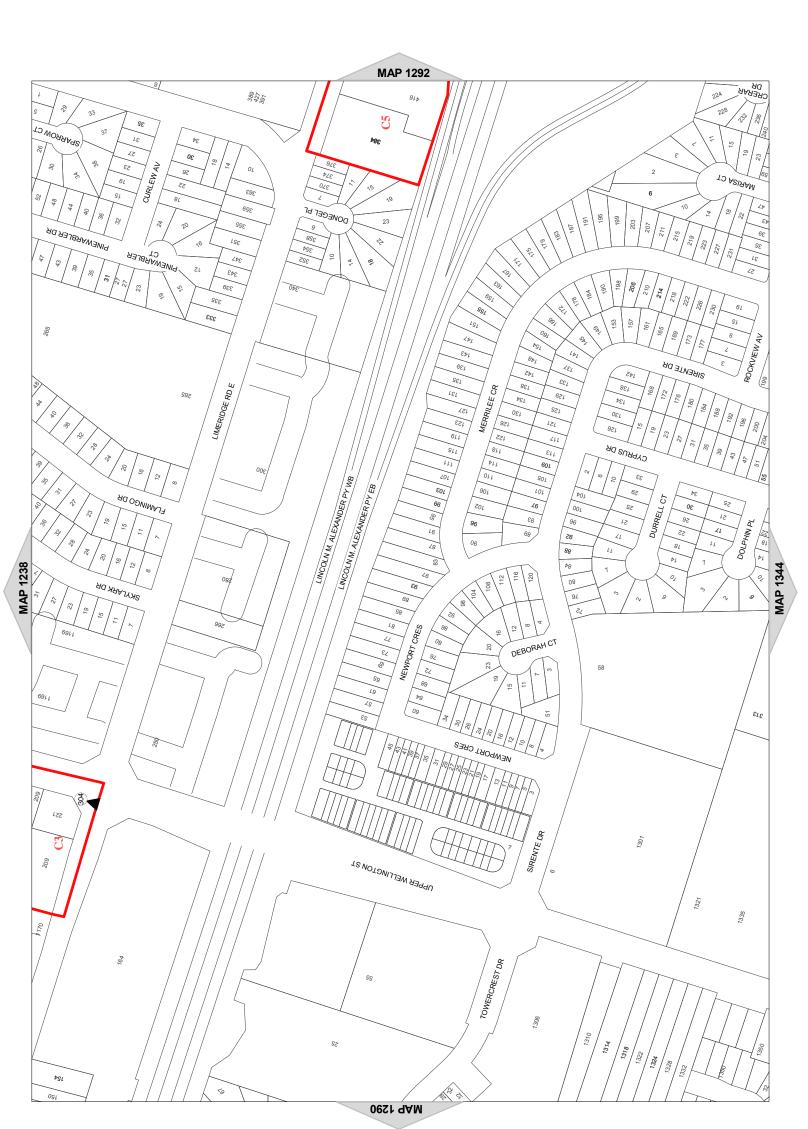


MAP 1291 of Schedule 'A'

Note: Features in the Legend may not appear in each individual map for every batch series of map

Railway Lake

İ

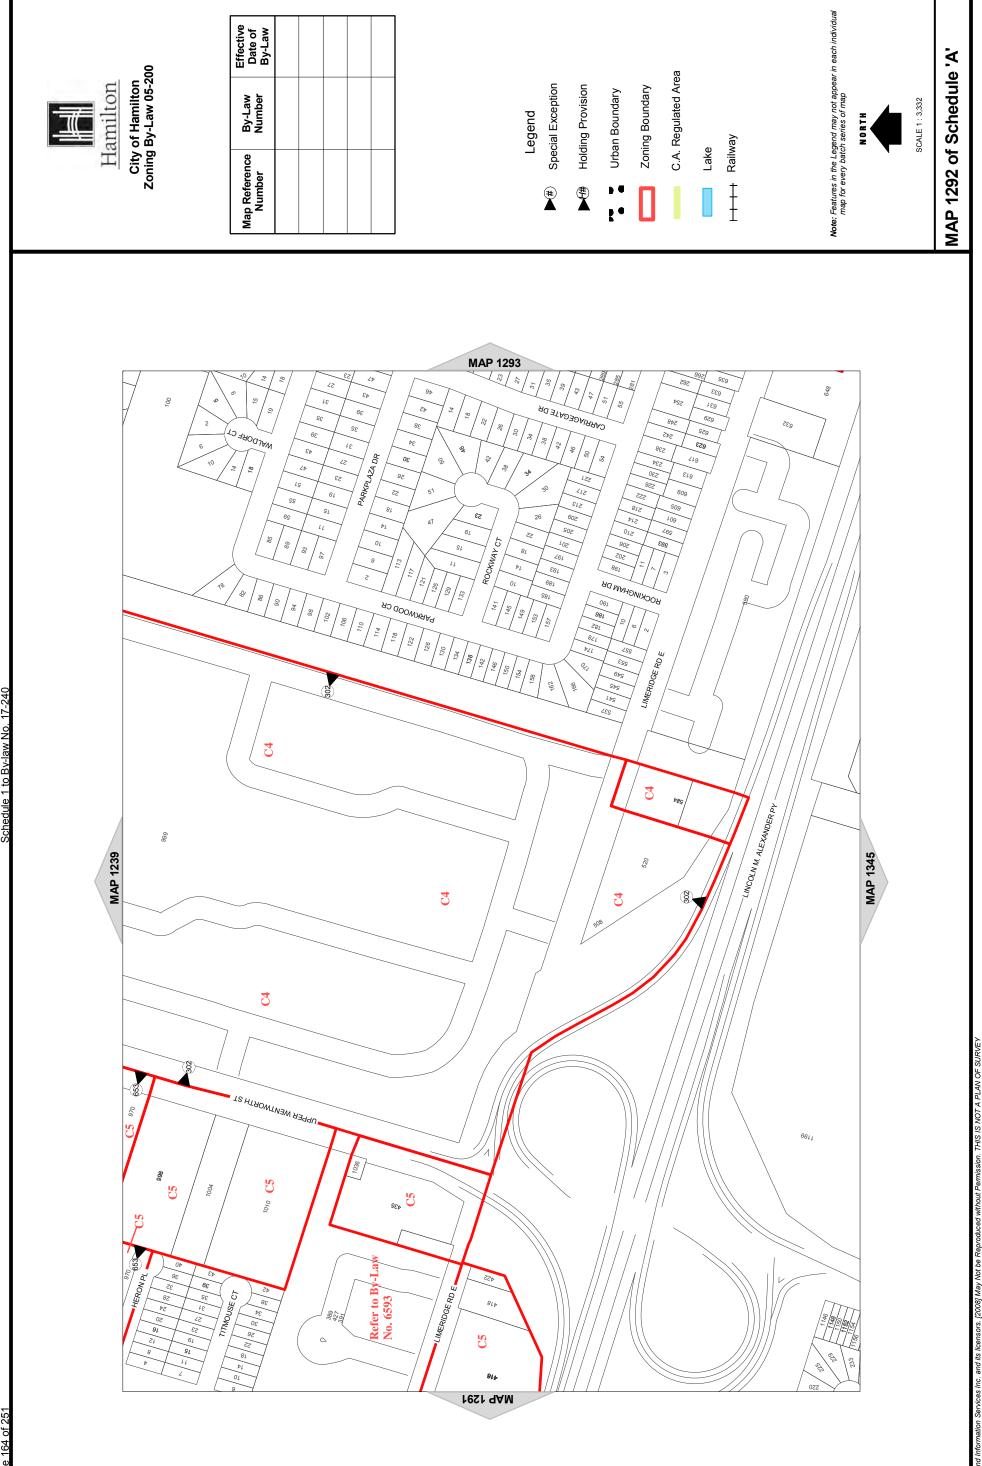

l Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

Hamilton

City of Hamilton Zoning By-Law 05-200

LAWFIELD DR

KIRKLAND AV

AG NITZUA

MAP 1240

BAROCHE ST

54 50

BETTINGHAM DE

GRANDOAKS DR

FONTAINBLEU

£21

69_L

UPPER SHERMAN AV

99L 19L

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend R# Special Exception Urban Boundary Zoning Boundary C.A. Regulated Area C.A. Regulated Area

MAP 1294


1 68 ,

FOLKSTONEAU

LAMBERT ST

LAWWHURST CT

9AM





MAP 1293 of Schedule 'A'

MAP 1241

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

135 131 127

611

SIL

111

103

Þ18

18

22

130

152

811

ÞL L

102

18

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Lake

YORRAINE DR

SYCAMORE ST

55

CURRIE ST

ÞĮ

0,

MAP 1295

CROZIERCT

PALMER RD

UPPER GAGE AV

E621 9AM

939

SHAMROCK CT

MICHAEL AV

Railway

UPPER OTTAWA ST

BILLINGTON CR

50

BIRCHCLIFFE CR

LL

BERYL ST

BRENDAN CT

103 107

PALMER RD

55

2

BIRCHVIEW DR

66 92

52

≥6

184 280

275

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1294 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective	Date of By-Law			
-	by-Law Number			
a series	мар кетегенсе Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

145

132

131 127

125

62

£96

824 828

LbL

844

091

852

KINGSTEY DE

MOXIEY DR

56 54 15

628

MAP 1242

C2788 331

198

738

843

091

bbl 138

128

128

4101

 s_{l0l}

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

MAP 1296

WECENCY ST

25

61

TS AWATTO A399U

32

94

WESTON CT

AG 3TASHTAON

553

64

*\$*9

9≥E 322 318

Lake

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1295 of Schedule 'A'

MAP 1348

MAP 1245

BROOKSTREAM CT

58

32

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake

MAP 1299

ST. ANDREWS DR

KNGSWOOD DR

611

911

111

101

7621 9AM

103

10

PEACECT

FOREST HILL CR

122

811

ÞLL

96

GLEN PARK CT

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1351


0

GLEN CASTLE DR

SCALE 1: 3,332

MAP 1298 of Schedule 'A'

Page 169 of 251






MAP 1299 of Schedule 'A'

SCALE 1: 3,332

Effective Date of By-Law



Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Nap reference Number	Number	Date of By-Law
	Legend	
₩ #	Special Exception	
Ĭ	Holding Provision	
5 } •	Urban Boundary	
Ž	Zoning Boundary	
Ö	C.A. Regulated Area	æ
Га	Lake	
T + Ra	Railway	




MAP 1305 of Schedule 'A'

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1253

170



212

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

DA GNAJTIVAA

129 212

ROYALWOOD CT

182

613

(S23)

5 209

JA NOISIN

GUYRAL PL

3051 **4AM**

8

629

TREDONIA PL

35

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway	
	#		} •				İ	

MAP 1307

SEE RURAL MAP 137

81 91

CLEARVIEW DR

GOLDCREST DR

VB DITAIRDA

FARMINGDALE CR

18

NINEHITT DE

Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 1306 of Schedule 'A'



RAILWAYST

PETTIT ST

8₽

NORBROOK DR

ESCARPMENT DR

EDGEVIEW DR

PROCK DR

MAP 1258

ARVINAV

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	
	#		t •			

MAP 1312

OIEI 9AM

aя ANONIW

801

WESTAV

Zoning Bou	C.A. Regul	Lake	Railway
			‡

130₫

DUBONNET DR

CHIANTI CR

VV.

MAP 1364

69 69


291 1/2 1 583

ORVIETO CT

TUSCANI DR

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1311 of Schedule 'A'

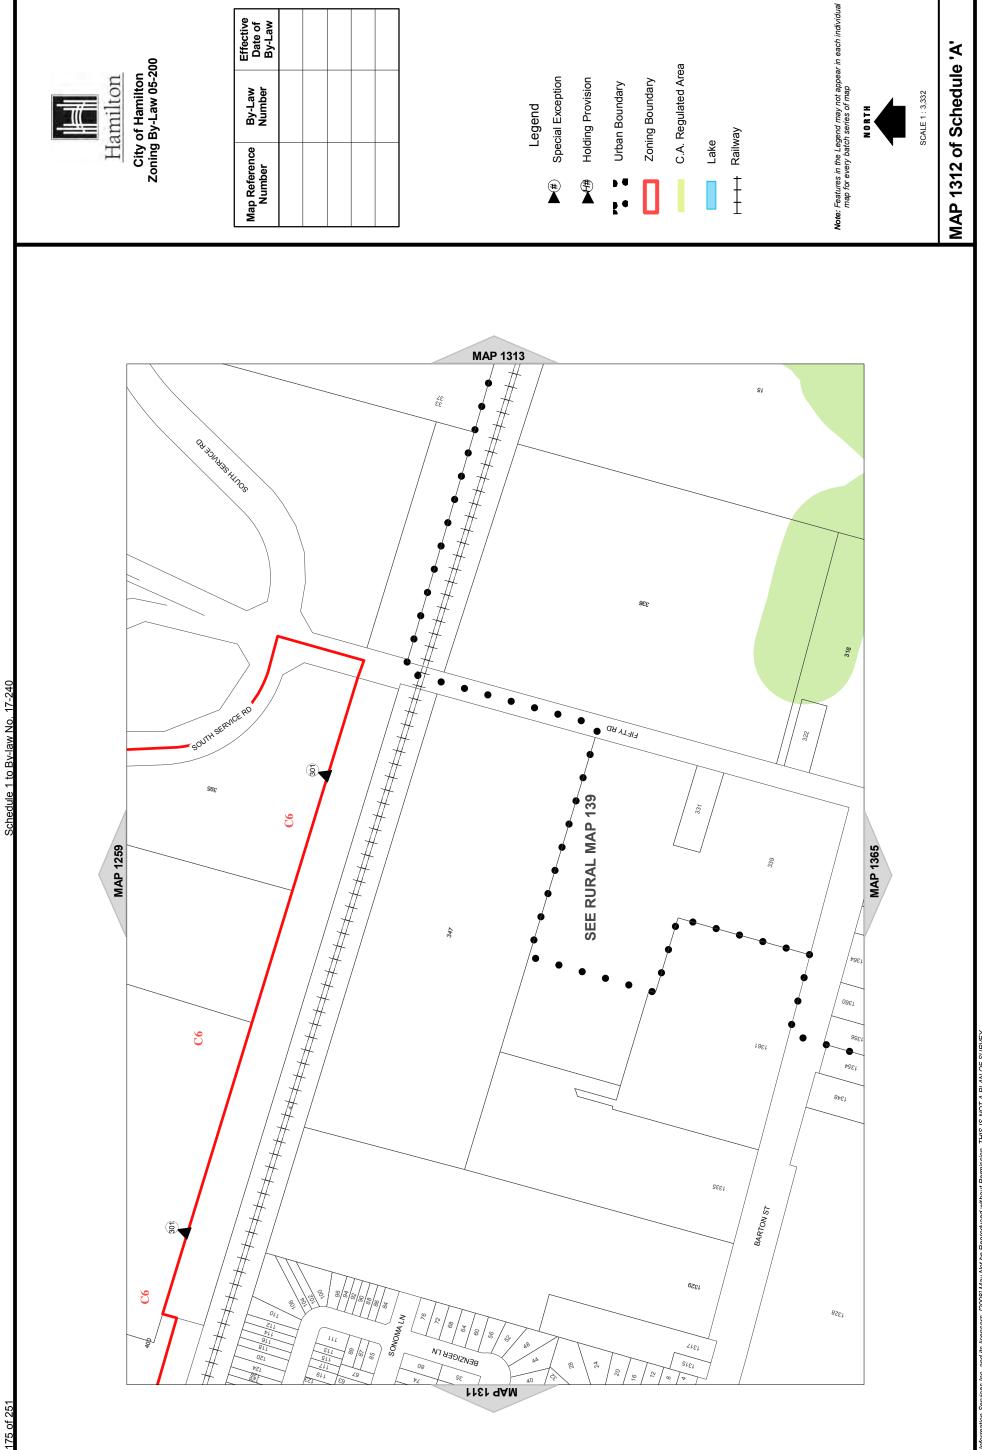

Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY



ot be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

ADELE CT

29

1045

MAP 1287

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Lake

MAP 1341

AG AAAGAAS

DONNICI DR

203

FILICE CT

£\$1

191

122

691

92_L

DONNICI DR

₽

634

6EE1 9AM

091

₽91

128

162

166

021 ÞZL

DONNICI DR

DANSON DR

CLAUDETTE GT

ε<u></u> ε<u></u> ε<u></u> ε

BENVENUTO CR

| OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1 | OS1

GISELE DR

ALFRIN CT

Railway ‡ ‡

Note: Features in the Legend may not appear in each individual map for every batch series of map

TS HTAAD

1760

MONA LISA CT

GIOTTO LN

RAPHAEL CT

EAGLEGLEN WY

96p 109

40g

DAVINCIBV

195


€∠⊊

RYMAL RD W

UPPER PARADISE RD

SCALE 1: 3,332

MAP 1340 of Schedule 'A'

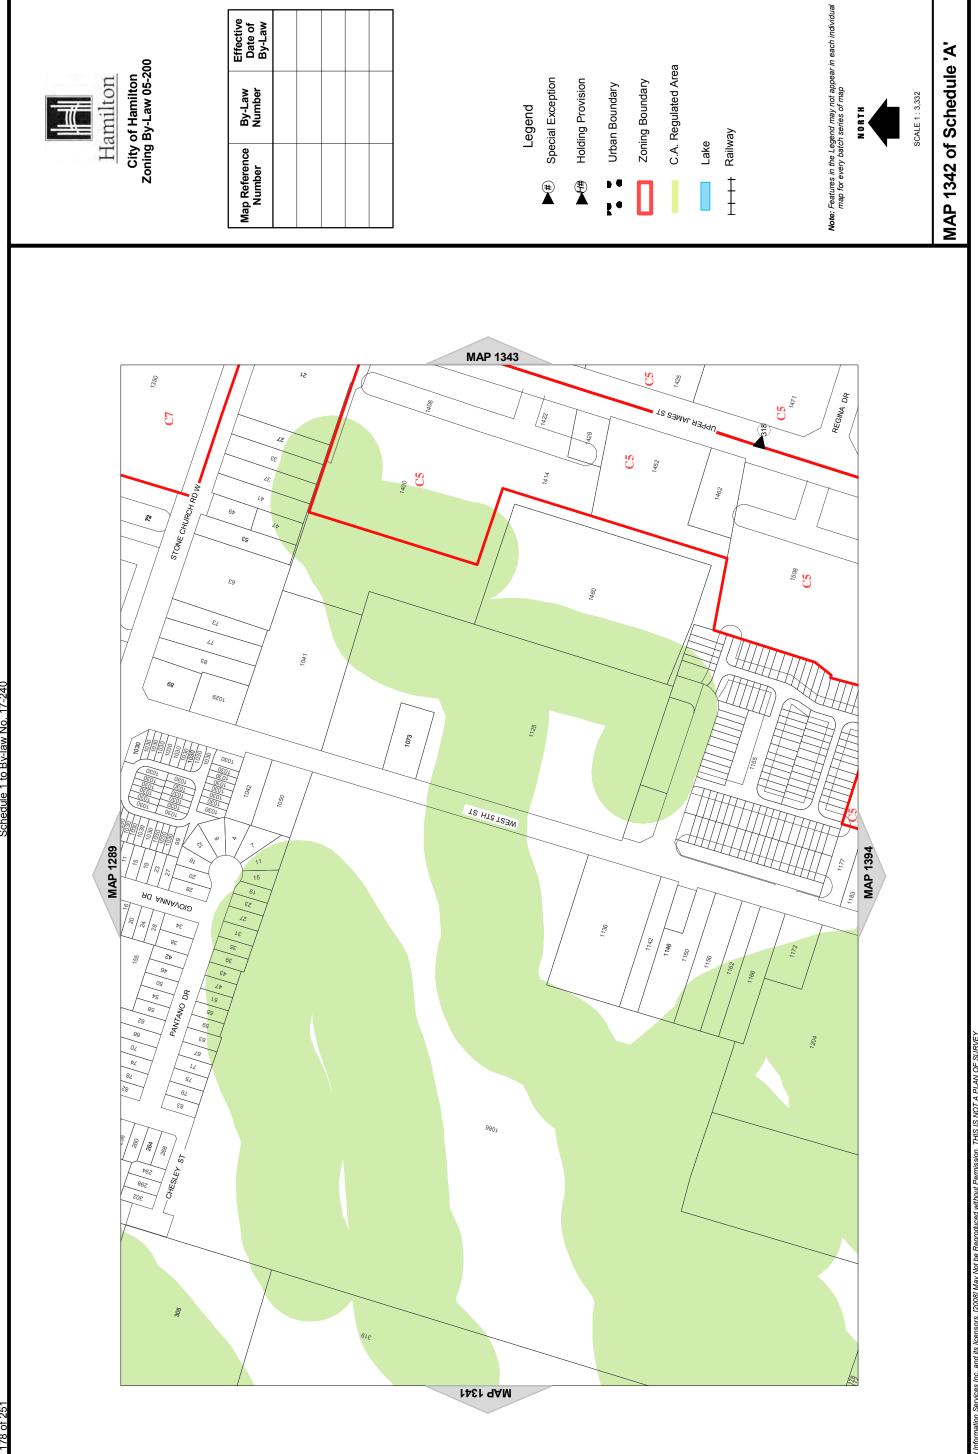

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

BAFFIN WY

1310

JOULETST

1341

C7

MAP 1290

1317

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

1400

DINEBIDGE DB

111

					sbe	PH ⊕	in the state of t	oz D	C.A	Lake
				Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Ф
									Ø	

MAP 1344

0e#L

161

181

02

1379

S421 9AM

CS


28

0₺

UPPER JAMES ST

1355

STONE CHURCH RD E



UPPER WELLINGTON ST

7494

291

7

C5 1405

1425

CS

1441

DICENSO DE

89_L

135

52

154



Note: Features in the Legend may not appear in each individual map for every batch series of map

DRAGOON DR

TORINO DR

95 91 87

75 81

ASCOLI DR

94 06 98

64 68 72

MAP 1343 of Schedule 'A'

AD SUARY


1347

1343

1349

UPPER WELLINGTON ST

MAP 1291



Effective Date of By-Law			
By-Law Number			
Map Reference Number			

LATORRE CT


Number By-Law				puə	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C A Beginsted Area
Number				Legend	Special Special	Holding Holding	Urban E	Zoning	C.A. Rec

MAP 1345

442

567

E4E1 9AM



Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1344 of Schedule 'A'



^{ATHERLEY} DR UPPER SHERMAN AV REGAL DR 202 213 214 214 217 218 Lg. 0ε RUSHBALE DR 46 45 15 9₺ 99 53 63 131 **49** 01 12 991 52 RAMSDEN DR 153 62 45 611 83 SLL 158 111 40_L **MAP 1292** 102 130 RANDOLF CT VA MARAHTUOS CHARING DR SOUTHPARK AV UPPER WENTWORTH ST

City of Hamilton Zoning By-Law 05-200

Hamilton

Effective Date of By-Law C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary By-Law Number Legend Railway Lake Map Reference Number ‡ ‡

MAP 1346

44E1 9AM

SCALE 1: 3,332

Note: Features in the Legend may not appear in each individual map for every batch series of map

RUSHDALE DR

RUPERTCT

127

181

9E1 6E1 EÞ1 4P1

122 69_L

\$2 848 \$2

121

KEDWOND DK

661

ς₂μ 62μ ε

ε

MAP 1397

RAMSDEN DR

09

145

138

134

130

245

021 *₽*∠1 *₽*∠1 122

156

122

811

ÞI I

011 901

201

MAP 1345 of Schedule 'A'



Effective Date of By-Law			
By-Law Number			
Map Reference Number			

851

148 148 832

LOCKTON CR

LIMERIDGE RD E

892

LINCOLV M. ALEXANDER BY

LAWWHURST DR

MAP 1293

S

Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway
	#		} •				‡ ‡

MAP 1347

UPPER GAGE AV

78

ROSEMETT 21

ROBSON CR

JA anodyjiw

REXFORD DR

ROBSON CR



Note: Features in the Legend may not appear in each individual map for every batch series of map

¹55

MAP 1398

JA OJZIATTA

31

SCALE 1: 3,332

MAP 1346 of Schedule 'A'

MAP 1348 6511 6511 7511 7511 7511 7511 7511 7511 CARSON DR C3 TS AWATTO ABAGU BOWDEN ST 256 248 252 264 260 985 BIRCHCLIFFE CR 523 921 921 801 611 BRETT CT E91 691 **MAP 1294** 841 ^{LI}MERIDGE RD _E bbl 91 BREWSTER ST 130 156 LINCOLNIA, ALEXANDER PY 61₁ 811 901 201 86 52 BIRCHWEW DR E PA PA Z ¹⁷5 ¹⁸¹ ¹⁸³ ¹⁸⁵ ¹⁸⁷ ¹⁹¹ ¹⁹³ ¹⁹⁵ 122 152 9451 **94**M

City of Hamilton Zoning By-Law 05-200

Hamilton

Note: Features in the Legend may not appear in each individual map for every batch series of map Effective Date of By-Law C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary By-Law Number SCALE 1: 3,332 Legend Railway Lake Map Reference Number ‡ ‡

MAP 1347 of Schedule 'A'

1199

QUEEN VICTORIA DR

TS MAHNIAA

198

922

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

By-Law	Legend Special Exception	Holding Provision Urban Boundary Zoning Boundary C.A. Regulated Area
	Legend Special Exoc	Holding Provision Urban Boundary Zoning Boundary C.A. Regulated A



36

7421 94M


 \mathbb{S}

Note: Features in the Legend may not appear in each individual map for every batch series of map

Railway

İ


MAP 1348 of Schedule 'A'

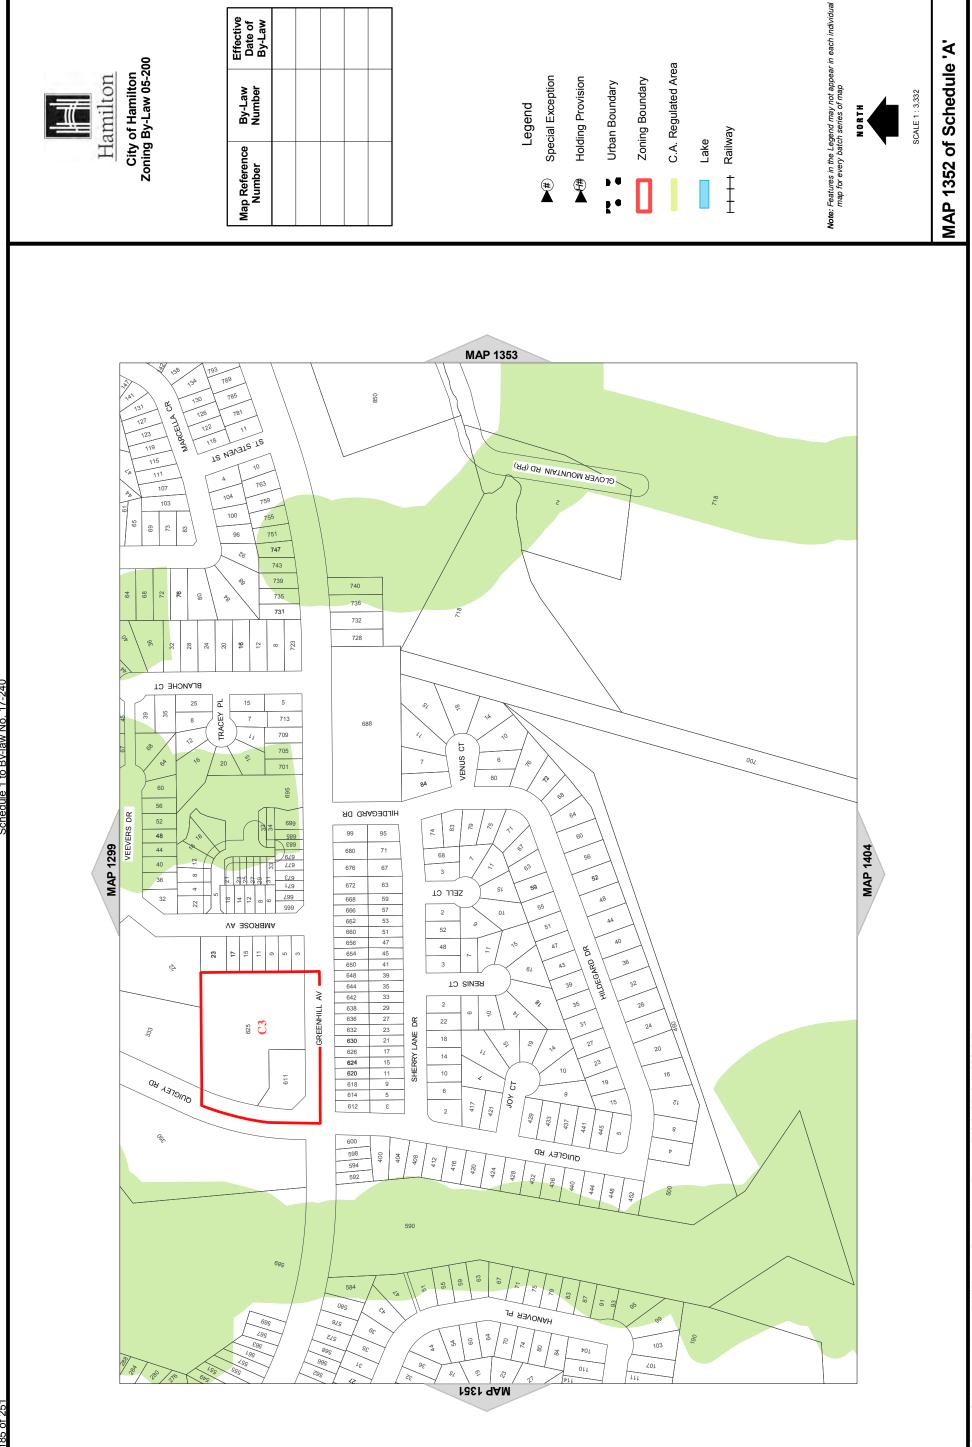

ices Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY



Effective Date of By-Law

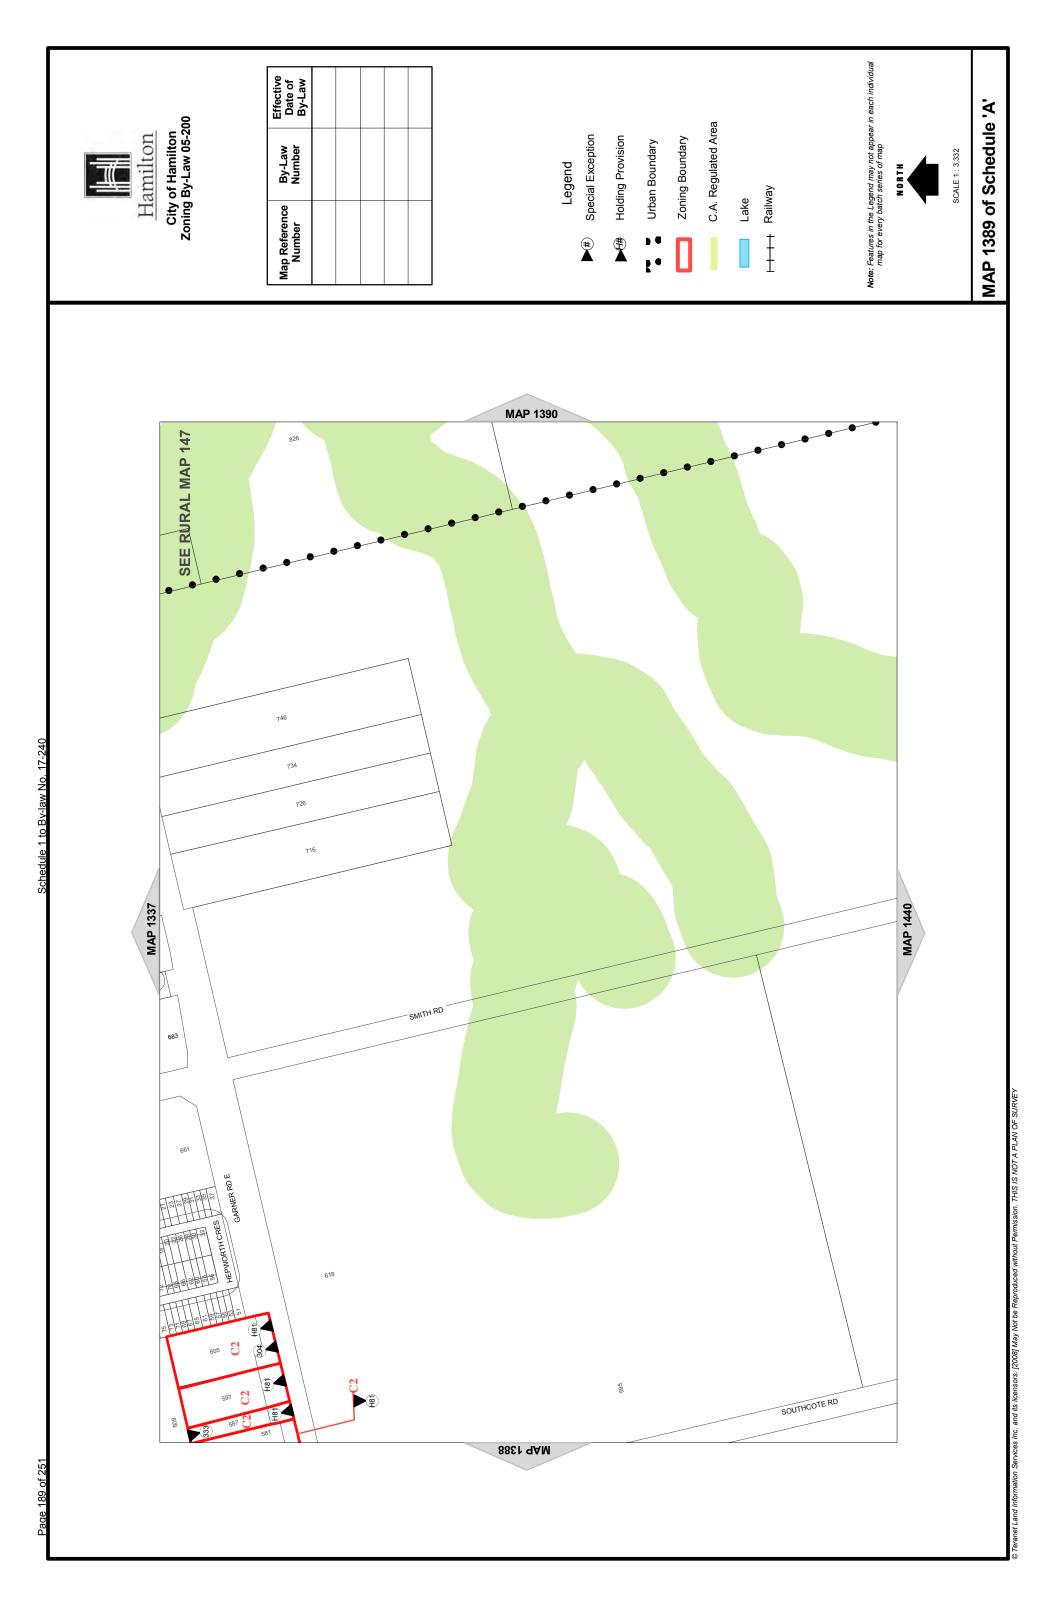

iission. THIS IS NOT A PLAN OF SURVEY

MAP 1396 AASTILLE ST 350 8 BRIGADE DR BOURBON CT MASSENA DR 88 ⊅€ 30 NA PLES BV 102 96 16 28 ε8 79 UPPER WELLINGTON ST 91 DICENZO DR 90 84 78 583 TORINO DR 95 80 86 029 29 95 94 38 88 TRIESTE PL 55^A 30 25 DICENSO DE TS SAJIS 511 503 499 MARILYN CT **MAP 1446** 18 55 71 75 79 83 87 BI 459 455 51 44 451 447 MOLINA DR SAN FELICE CT 444 34 22 443 439 436 432 DICENZO DR 435 431 427 423 419 75 79 83 87 424 422 420 418 416 414 0*þ*[AO ASSETA RYMAL RD E REGINA DR CS 4651 **JAM**

Effective Date of By-Law City of Hamilton Zoning By-Law 05-200 Hamilton By-Law Number Map Reference Number

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

Railway Lake ‡ ‡ Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1395 of Schedule 'A'

SCALE 1: 3,332

MAP 1345

 \mathbb{C}

RIDGEMOUNT DR

TWIN CR

61 91

Hamilton

City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

MAP 1398

96EL

BUTLER DR

VW SIJOAANNA

BEAVERTON DR

ELEANOR AV

1448

200

Note: Features in the Legend may not appear in each individual map for every batch series of map

211 109

EAGLEWOOD DR

CARTIER CR

MAP 1397 of Schedule 'A'

MAP 1346

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake

156

668

 \mathbb{S}

STONE CHURCH RD E

LEAWAY AV

JA WAZLAMAON

ENOLA CT

\$9**2** 642

MENTINO CR

Þ82

30

\$77 877

835

587

TS OAMAA

892 692 292

7951 9AM

MAP 1399

QUAIL DR

QUESTOR CT

QUEEN VICTORIA DR

ROBERTSFIELD DR

RONDEAU ST

ALCONBURY DR

88 559

ARDLEIGH ST

295

UPPER GAGE AV

TO AMAA

RAVENBURY DR

53

61

SI

AMBLECOTE PL

 ζ

22


189

TO GOOWNAA

450

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1398 of Schedule 'A'



1199

MAP 1347

QUEENSLEA DR

\$\int \text{E9} \\ 6g \\ gg \\

289 293

292

87

QUAKER CR

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend	Special Exception Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Kaliway
#		ţ•				<u> </u>

1227

1375

ROCHELLE AV

QUINCY CT

1021

VA WNIUQ

/≈,

MAP 1400

UPPER OTTAWA ST

QUEENSBURY DR

REDBURY ST

QUEEN VICTORIA DR

QUAKER CR

86E1 9AM

Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 1399 of Schedule 'A'

MAP 1351

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake

AUDUBON ST. S

MAP 1404

ACKLAND ST

74

N TS NOBUGUA

AUDUBON ST N

LL ٩Į

42 1/2

2041 9AM

ASHBURY LN

29

TO A3JAZA

ÞΙ

22 20 18

SILVERVINE DR

 \mathbb{C}

MAP 1454

ACKLAND ST


PARAMOUNT DR


AMBERWOOD ST

ATHENIA DR

Note: Features in the Legend may not appear in each individual map for every batch series of map


MAP 1403 of Schedule 'A'

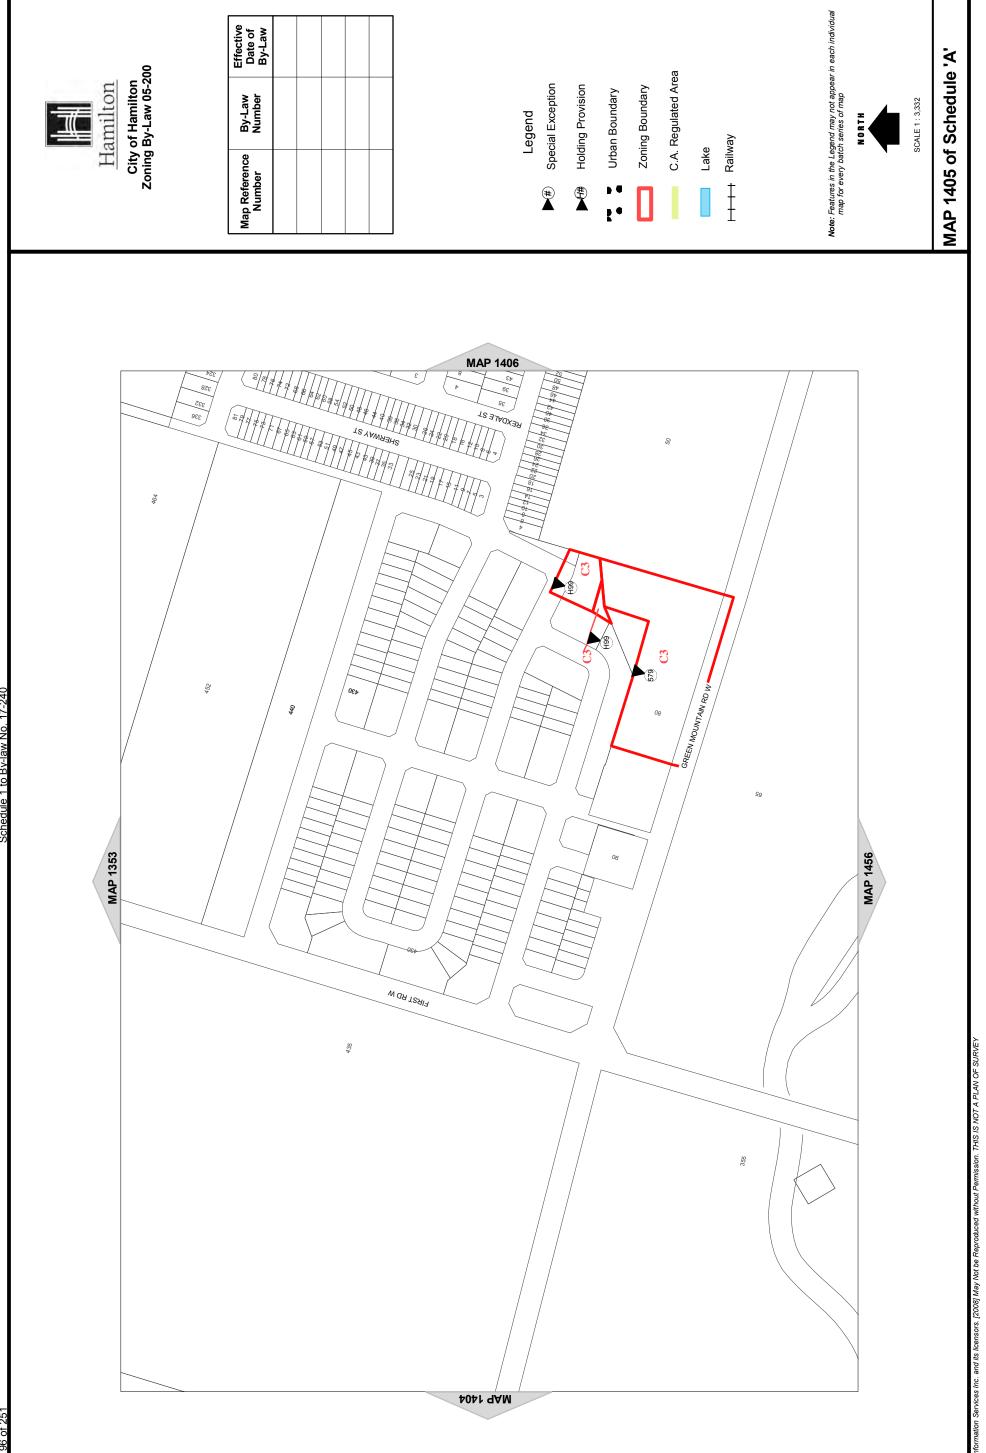

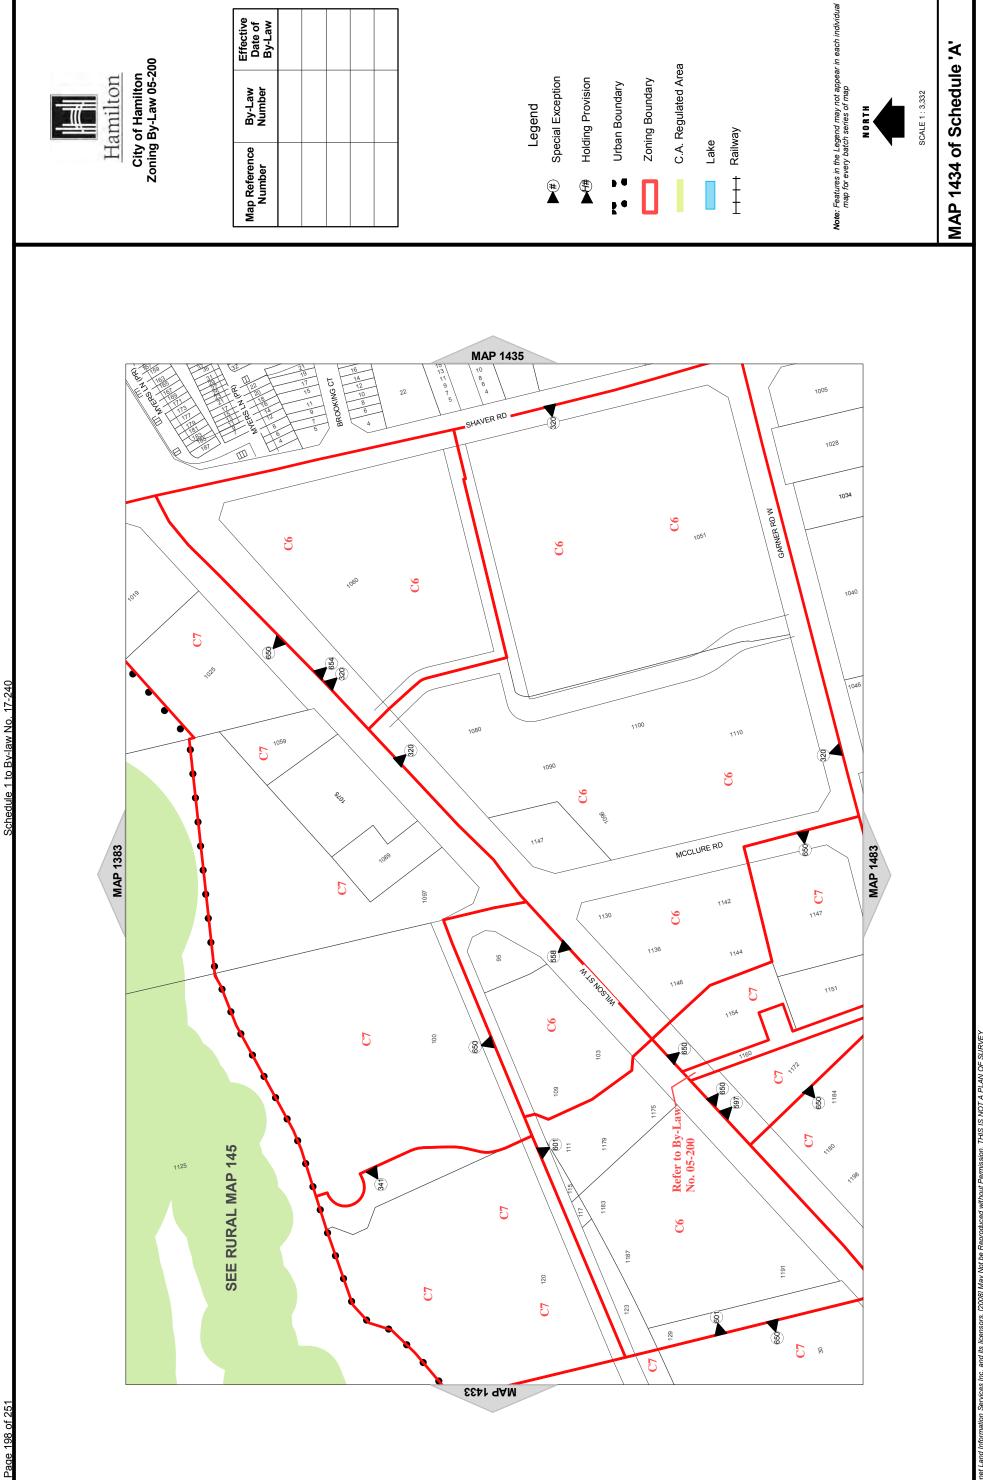



nd Information Services Inc. and its licensors. [2008] May Not be Reproduced without Pemission. THIS IS NOT A PLAN OF SURVEY

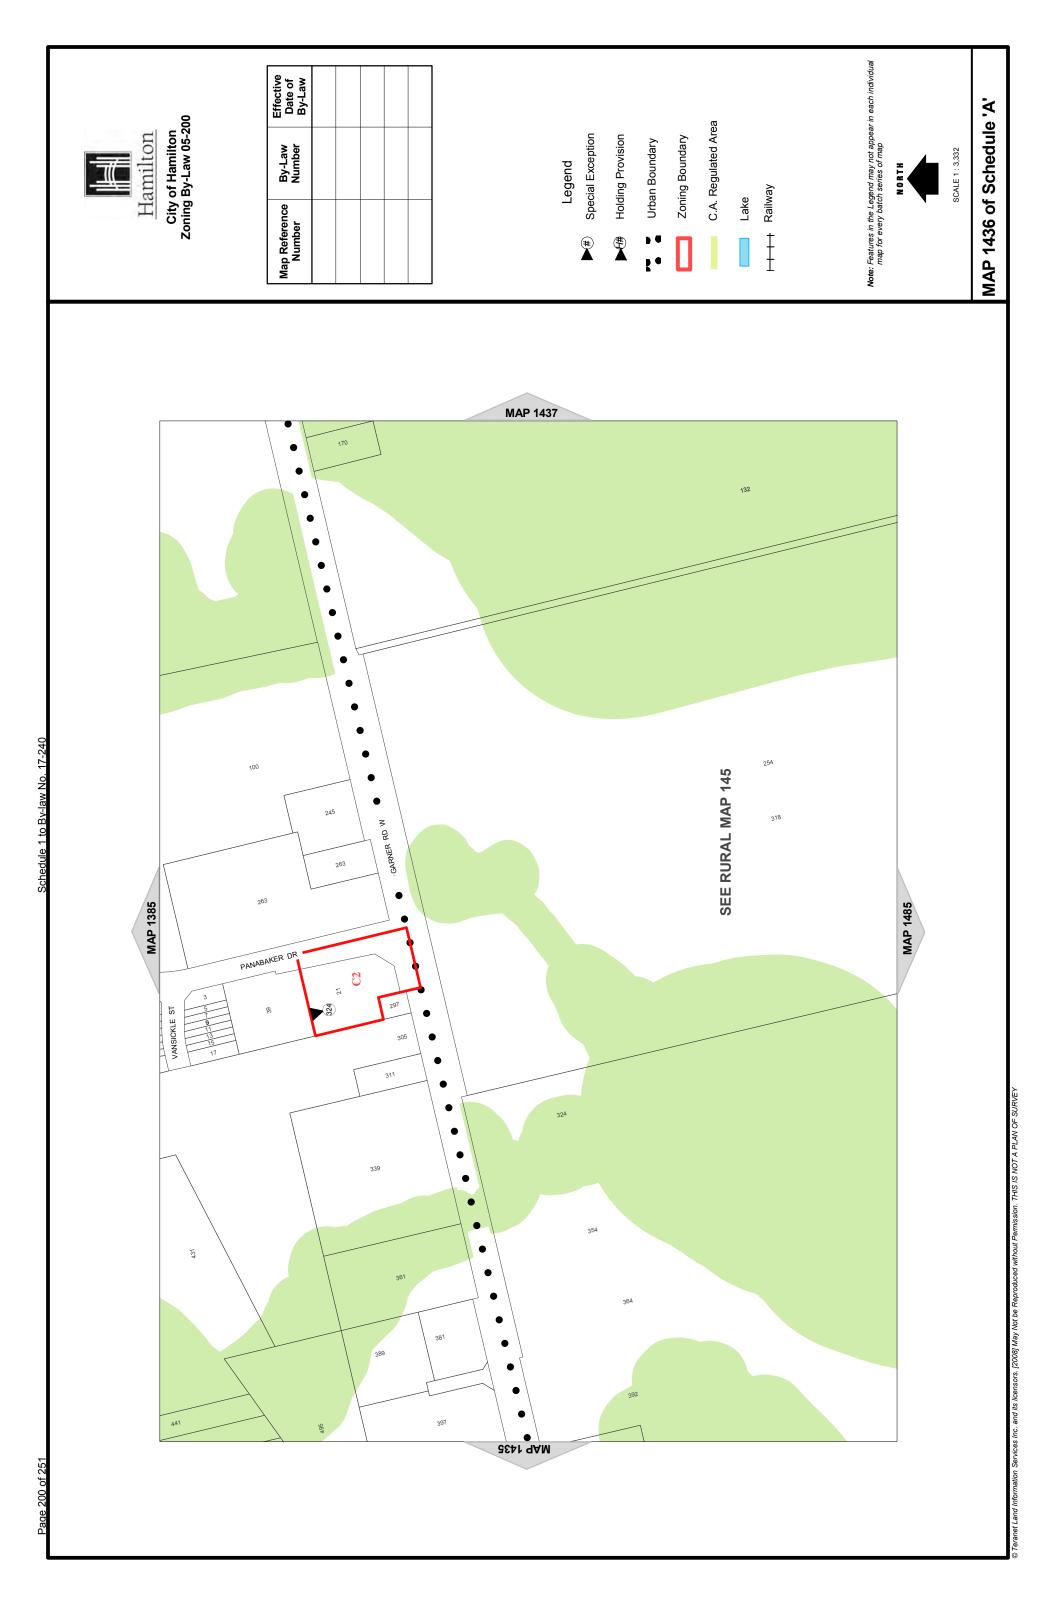

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

			Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway	
				#		r•				İ	
											_

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1443 of Schedule 'A'

SCALE 1: 3,332



Effective Date of By-Law

MAP 1445 of Schedule 'A'

121 28 28 628 628 758 758 758 921 621 WAPLERIDGE DR 90 RYMAL RD E ELITE DR 884 90 UPPER WENTWORTH ST AU XYNO **8**7 MAP 1396 1620 10₽ 323 9441 **4AM**

City of Hamilton Zoning By-Law 05-200

Hamilton

Legend

Legend

Legend

Legend

Legend

Legend

Legend

Legend

Legend

Legend

Legend

Legend

Legend

Legend

Legend

Lake

C.A. Regulated Area

C.A. Regulated Area

Lake

Lake

Lake

Lake

MAP 1448

MAP 1447 of Schedule 'A'

SCALE 1: 3,332

AROWHEAD DR

MAGNER DR

JESSICA ST

MAP 1496

PHILLIPODR

BIANCA DR

MAP 1397

City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

MAP 1449

BRENDA ST

TS OJAH

TO ONASJOB

UPPER SHERMAN AV

TAA1 9AM

1560

ELEANOR AV

DULGAREN ST

0591

1530

DULGAREN ST

EAGLEWOOD DR

7 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	regend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area	Lake	Railway	
		#	#	; ·		l		Ī	

ERIKA CR



\$\frac{\fin}}}}}}{\frac}\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\fir}}}}}}}{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{\frac{

\$669 6669 \$\frac{1}{1}\text{19}\$ \$\frac{9}{9}\text{19}\$

EAGLEWOOD DR

199

MAP 1497

929

899

*b*99

721


S02

929

/28

255

MAP 1448 of Schedule 'A'

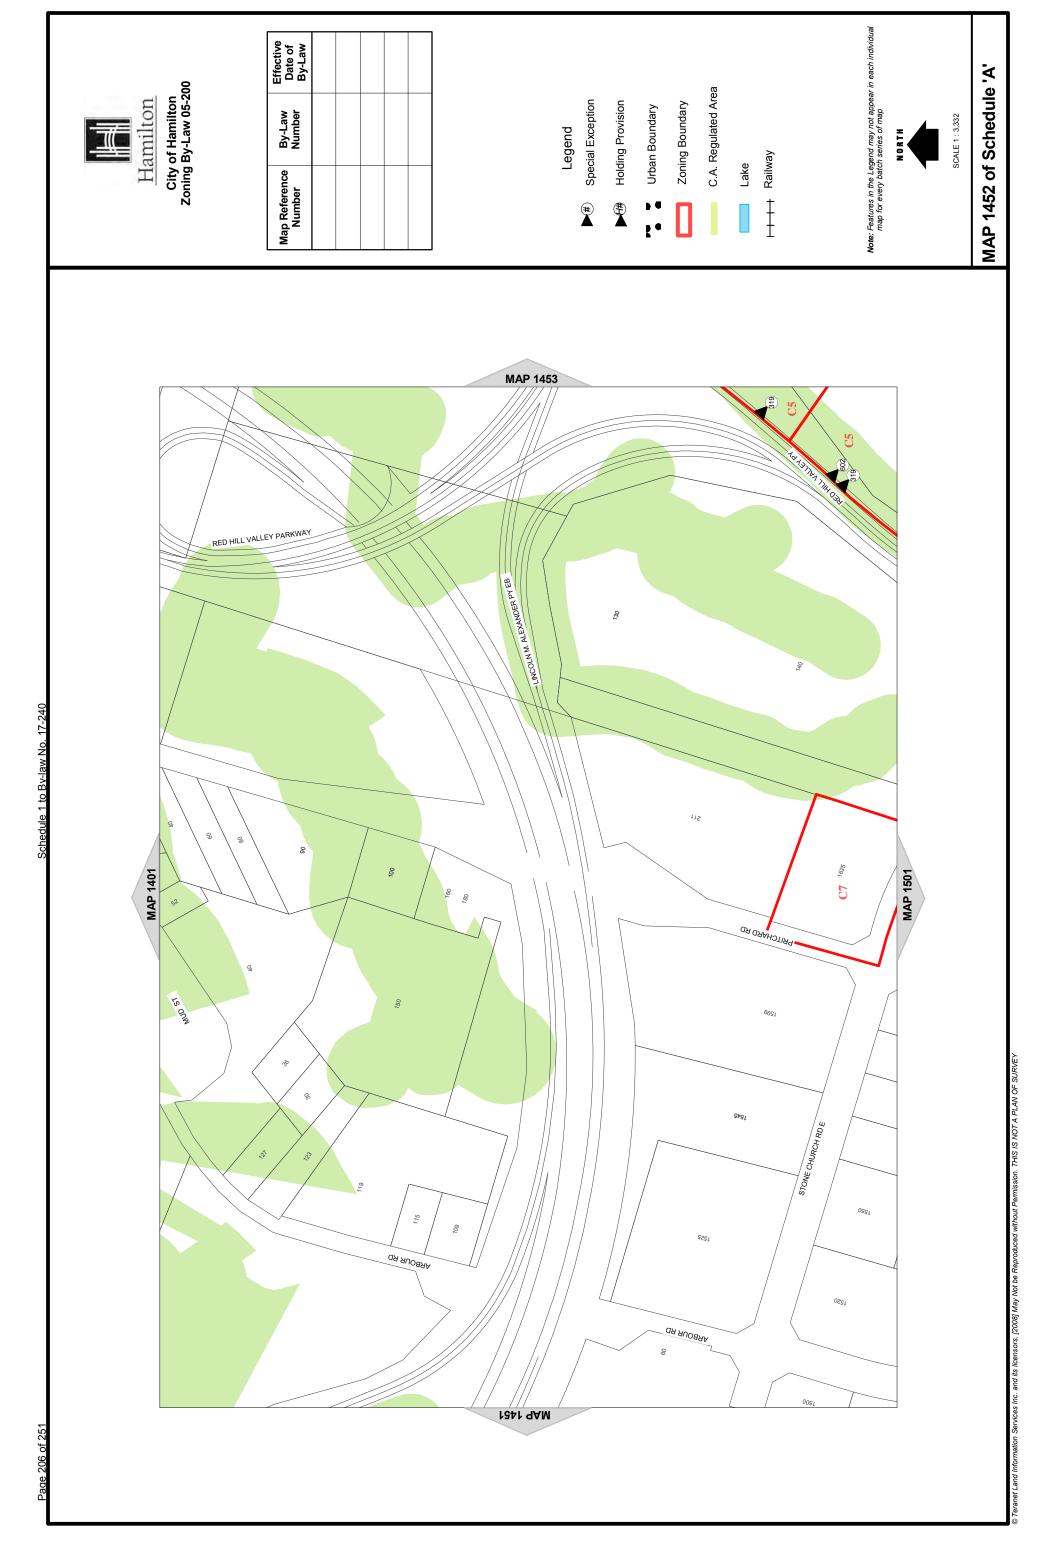

\$61 \$00\$ \$00\$ \$00\$ \$00\$ \$00\$ 140 68_L 134 132 130 124 124 122 120 118 116 111 106 104 102 100 98 96 92 90 88 86 621 12 TS HTAOWSNIA 69 67 ⊅9 65 62 63 MEADOW WOOD CR HOPEWELL CR 60 61 10 59 12 56 136 57 14 130 55 53 51 MUDSTW 49 1567 WINTERBERRY DR **MAP 1402** 430 436 LINCOLN M. ALEXANDER PY WB 252 252 C UPPER MOUNT ALBION RD 27 239 202 UPPER MOUNT ALBION RD CORNERSTONE DR CS **MAP 1452**

201

461

City of Hamilton Zoning By-Law 05-200

Hamilton

Note: Features in the Legend may not appear in each individual map for every batch series of map Effective Date of By-Law C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary By-Law Number SCALE 1: 3,332 Legend Railway Lake Map Reference Number ‡ ‡

55

53

51

CLEVELAND

27 25 23

11

13

S

196

200

33

22

49

47

21

56

300

325

ARTFRANK DR

MARKHAM CR

13

45

MAP 1454

353

MAP 1453 of Schedule 'A'

Hamilton
City of Hamilton
Zoning By-Law 05-200
Number
Number
By-Law
By-Law


Legend
Special Exception
Holding Provision
Urban Boundary
Zoning Boundary
C.A. Regulated Area
Lake
Lake

•


SCALE 1: 3,332

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1454 of Schedule 'A'

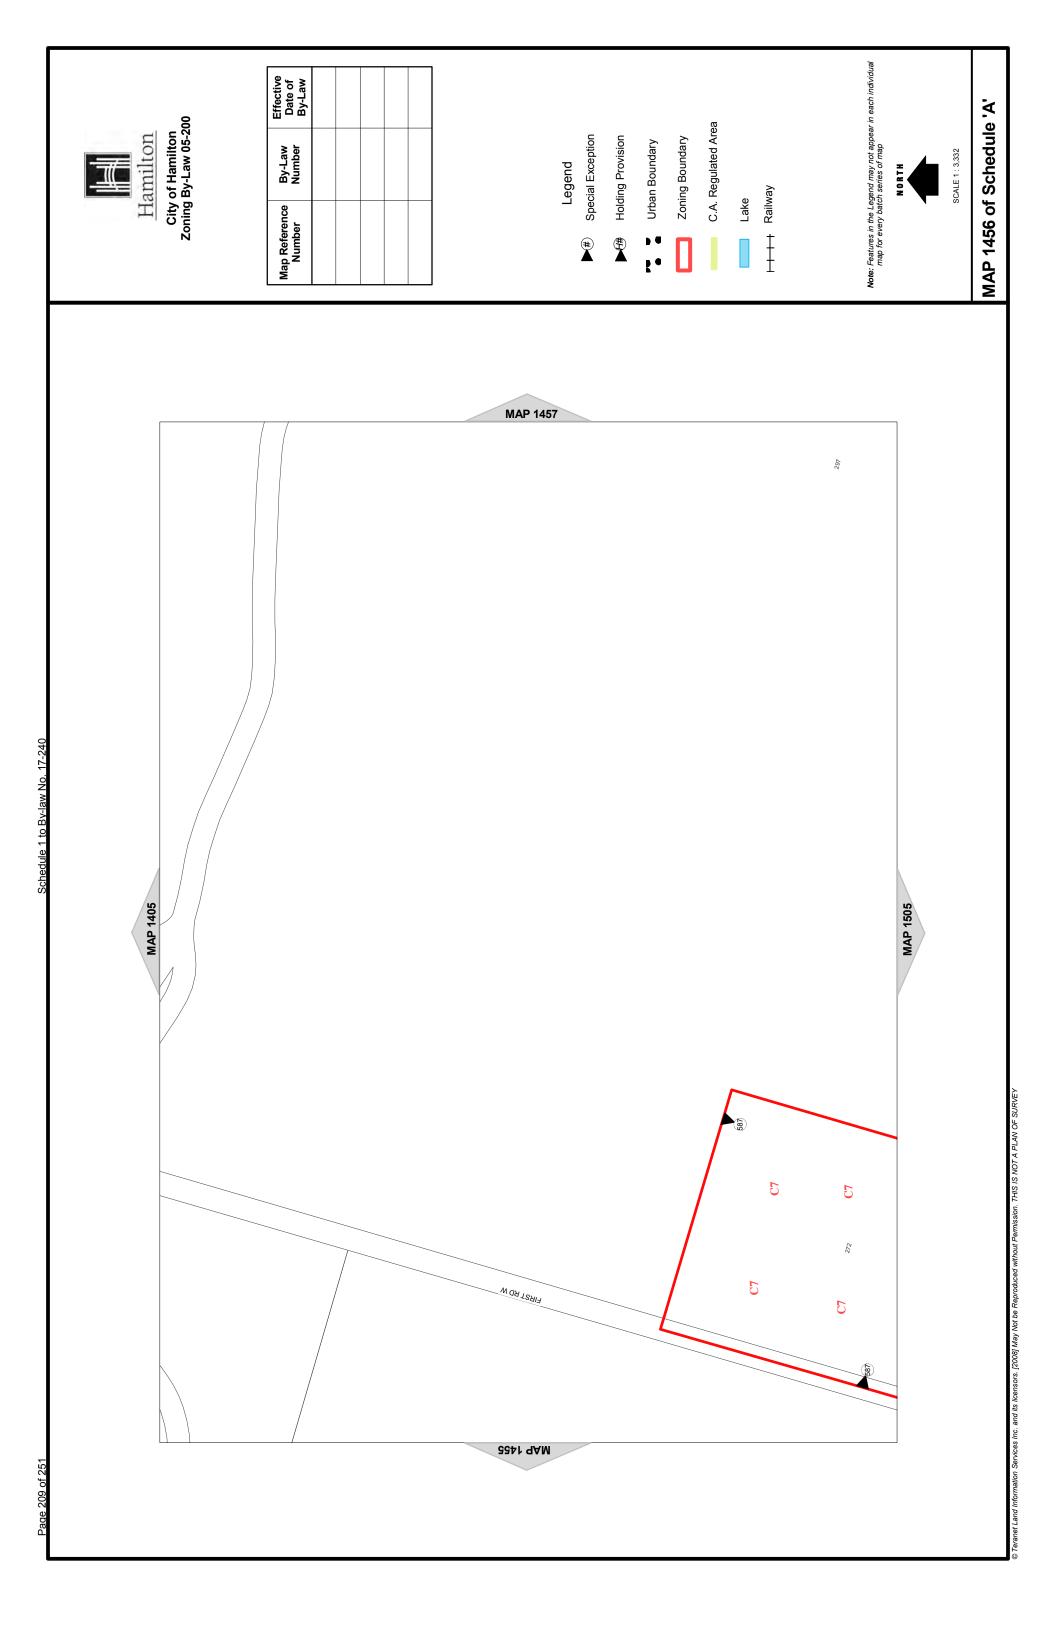




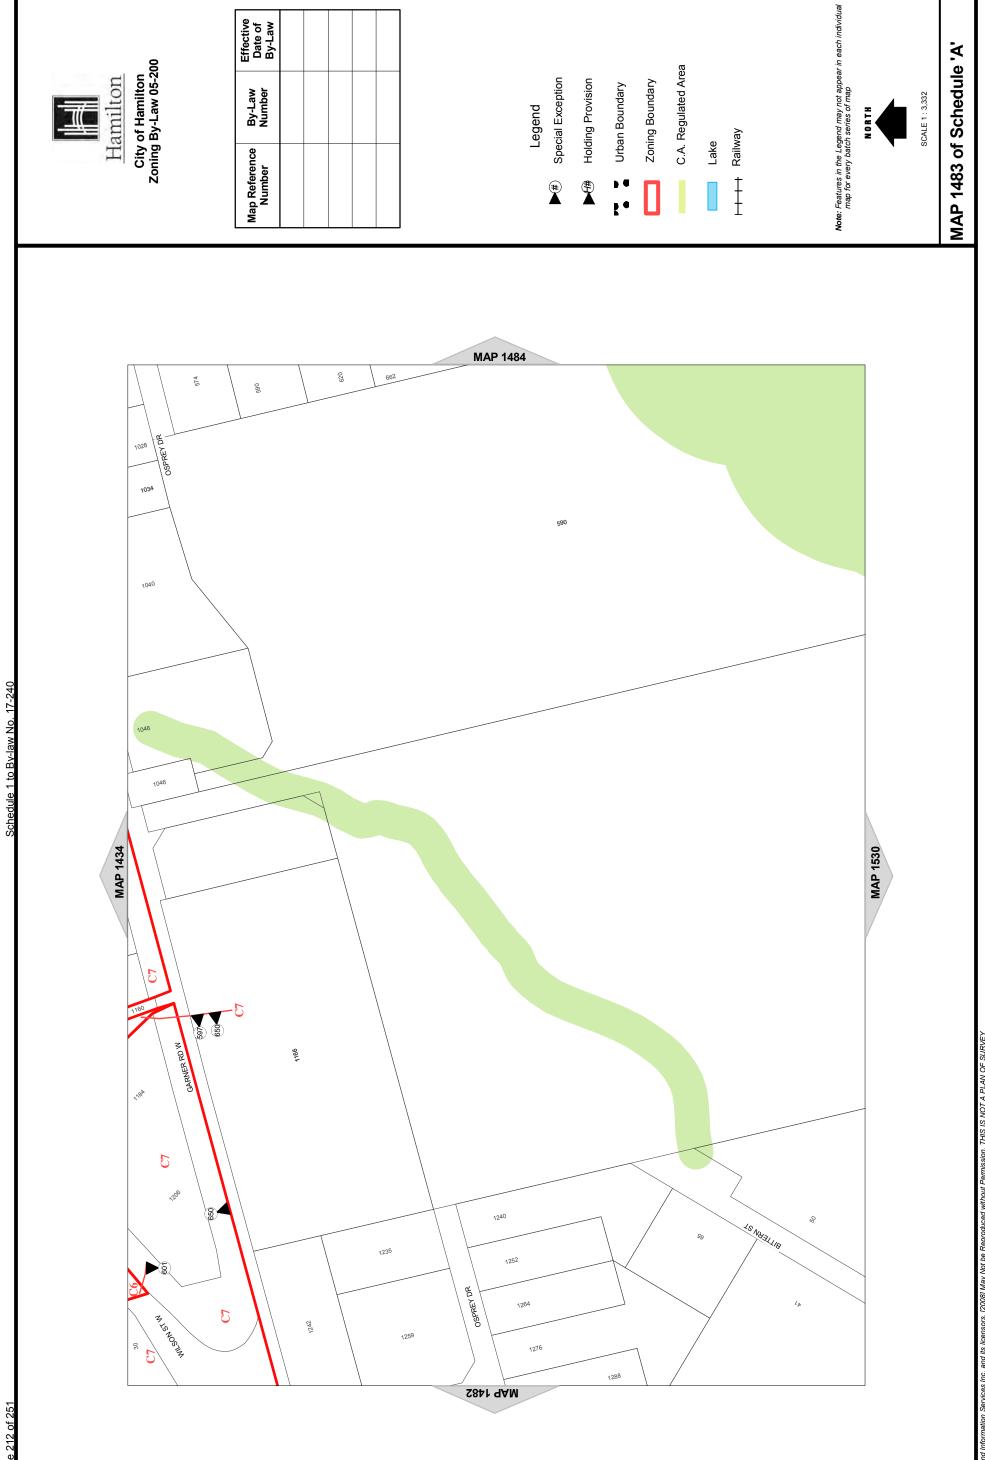




ation Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

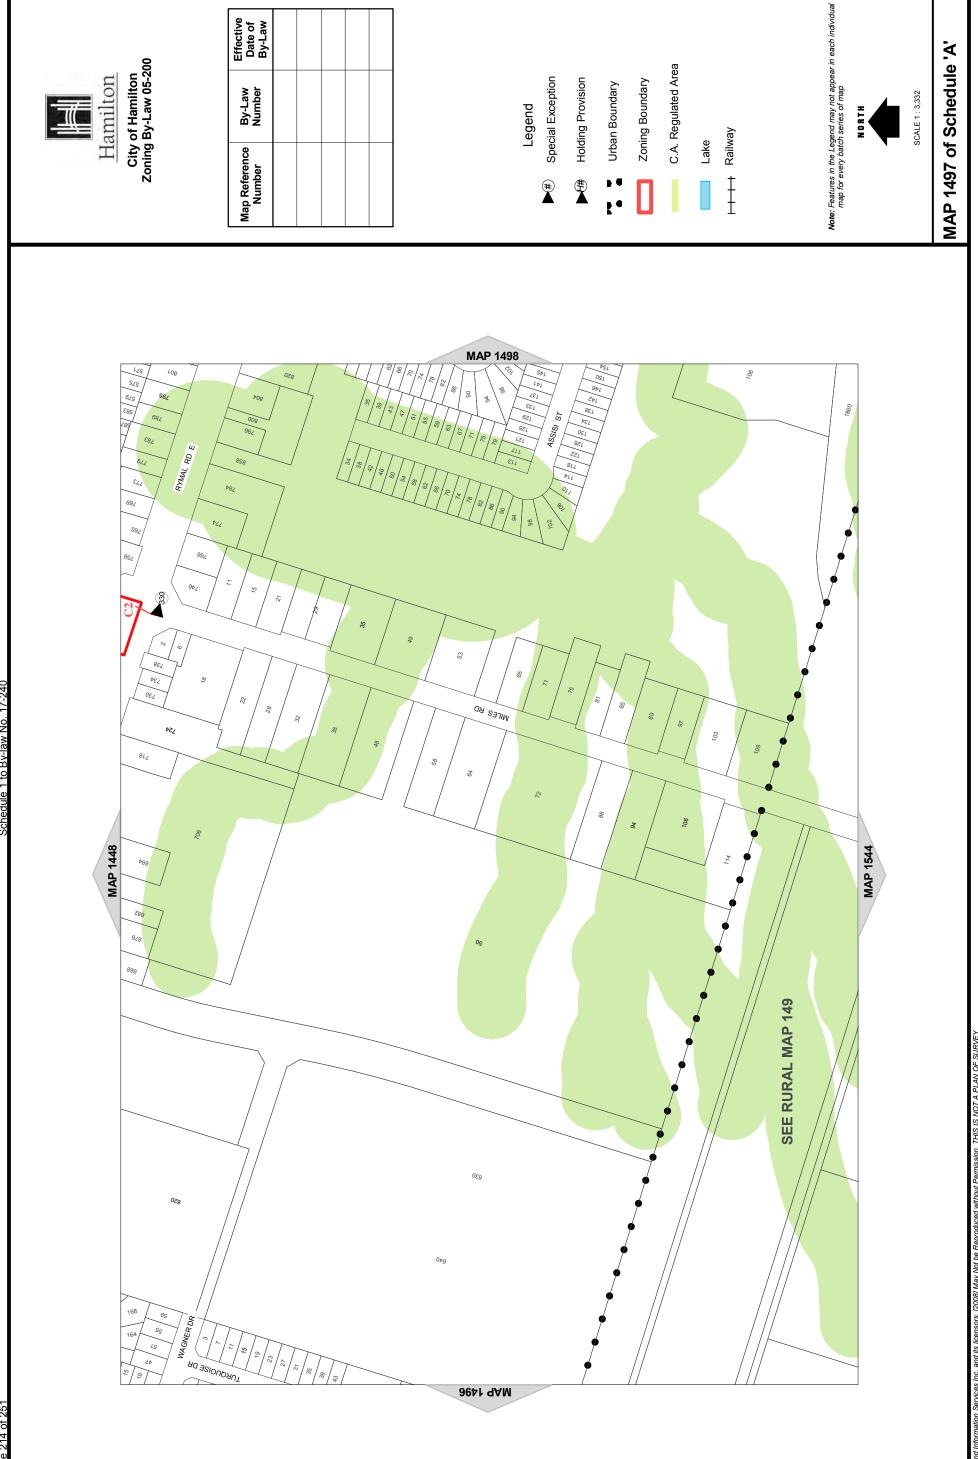


ors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

MAP 1449




Effective Date of By-Law									o,		
By-Law Number				Legend	Special Exception	Holding Provision	Urban Boundary	Zoning Boundary	C.A. Regulated Area		/ay
Map Reference Number					eds ##	Holo	n n	Zon	C.A.	Lake	H + + Railway

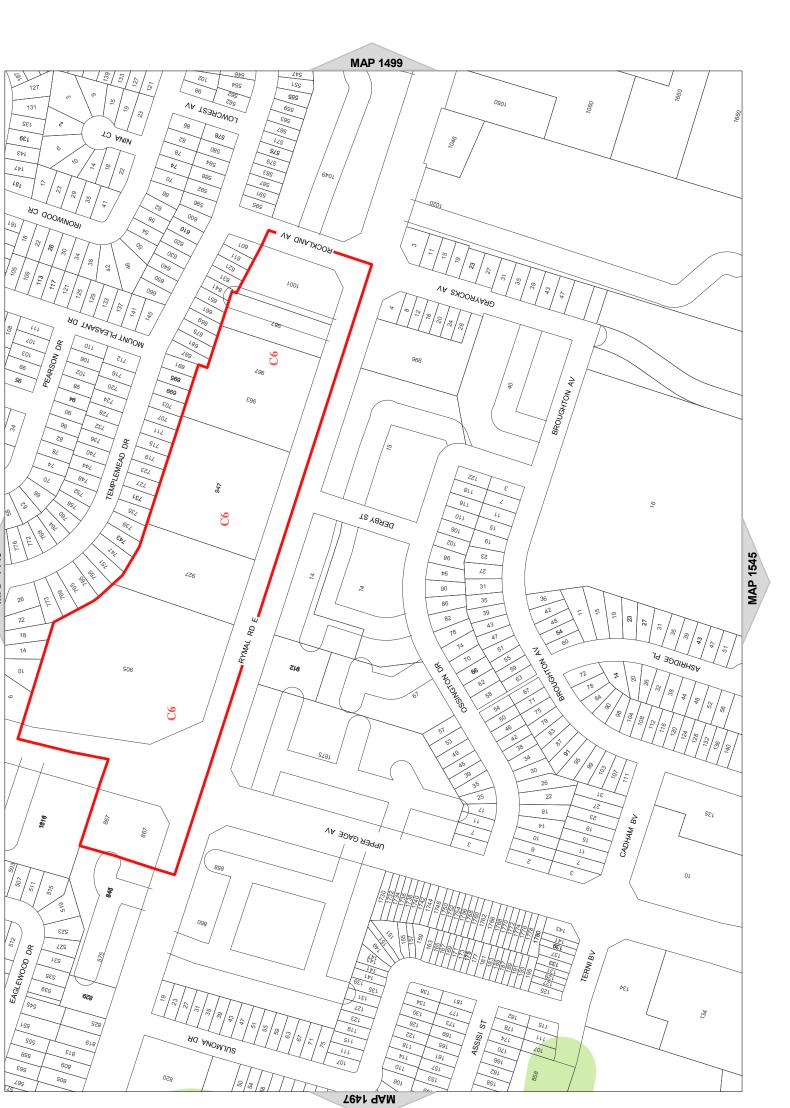


MAP 1498 of Schedule 'A'

Note: Features in the Legend may not appear in each individual map for every batch series of map

and Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF s

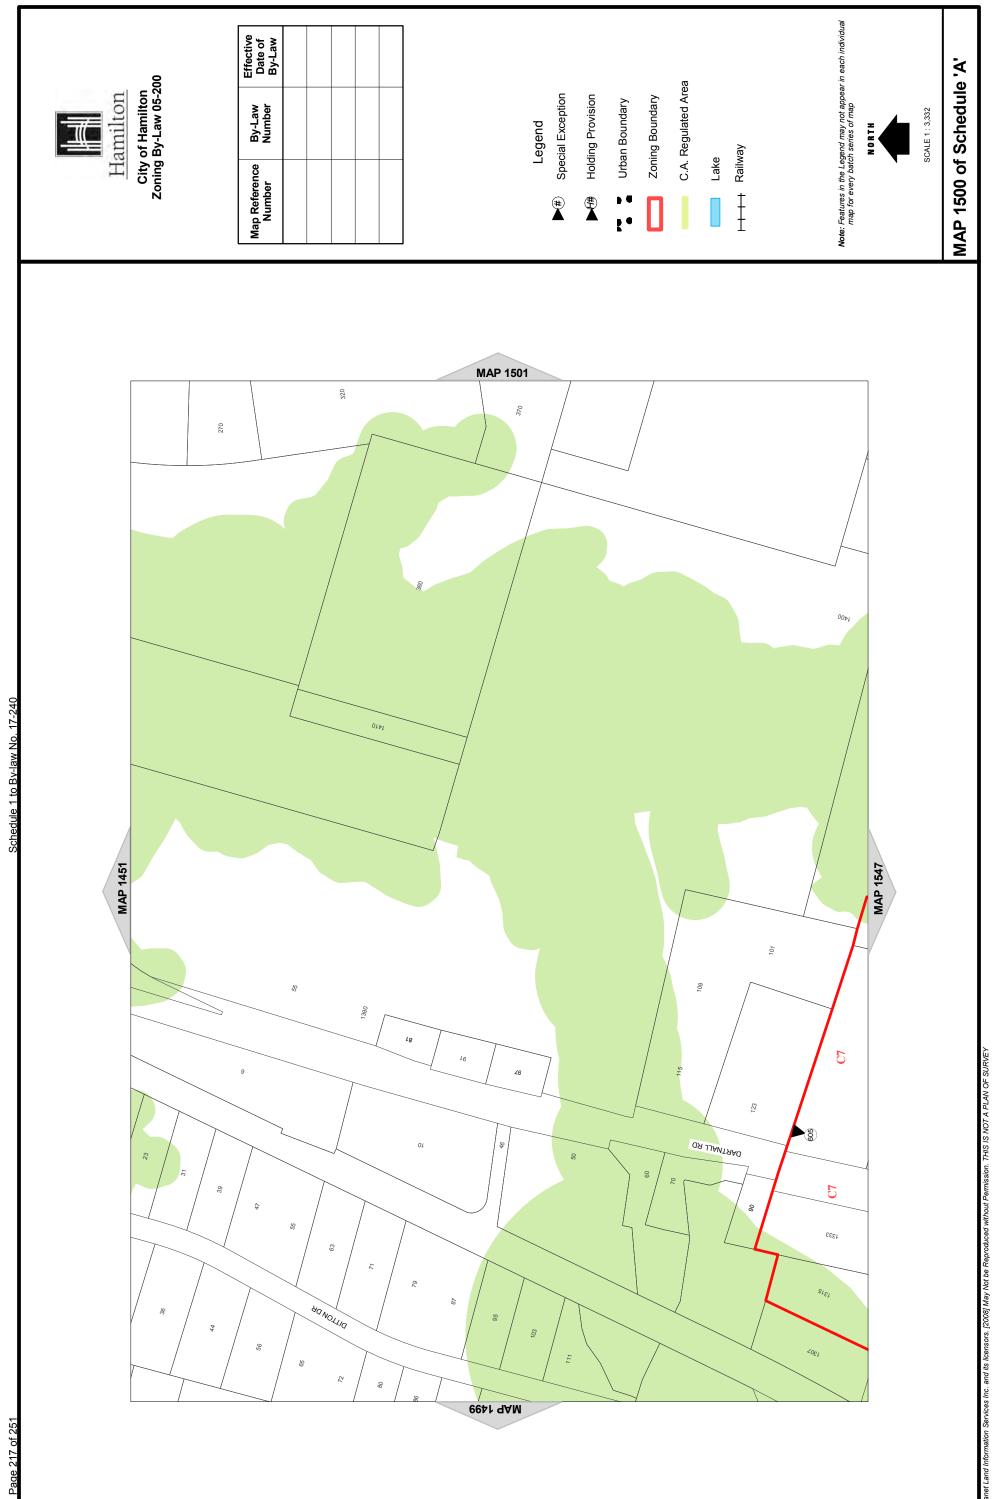

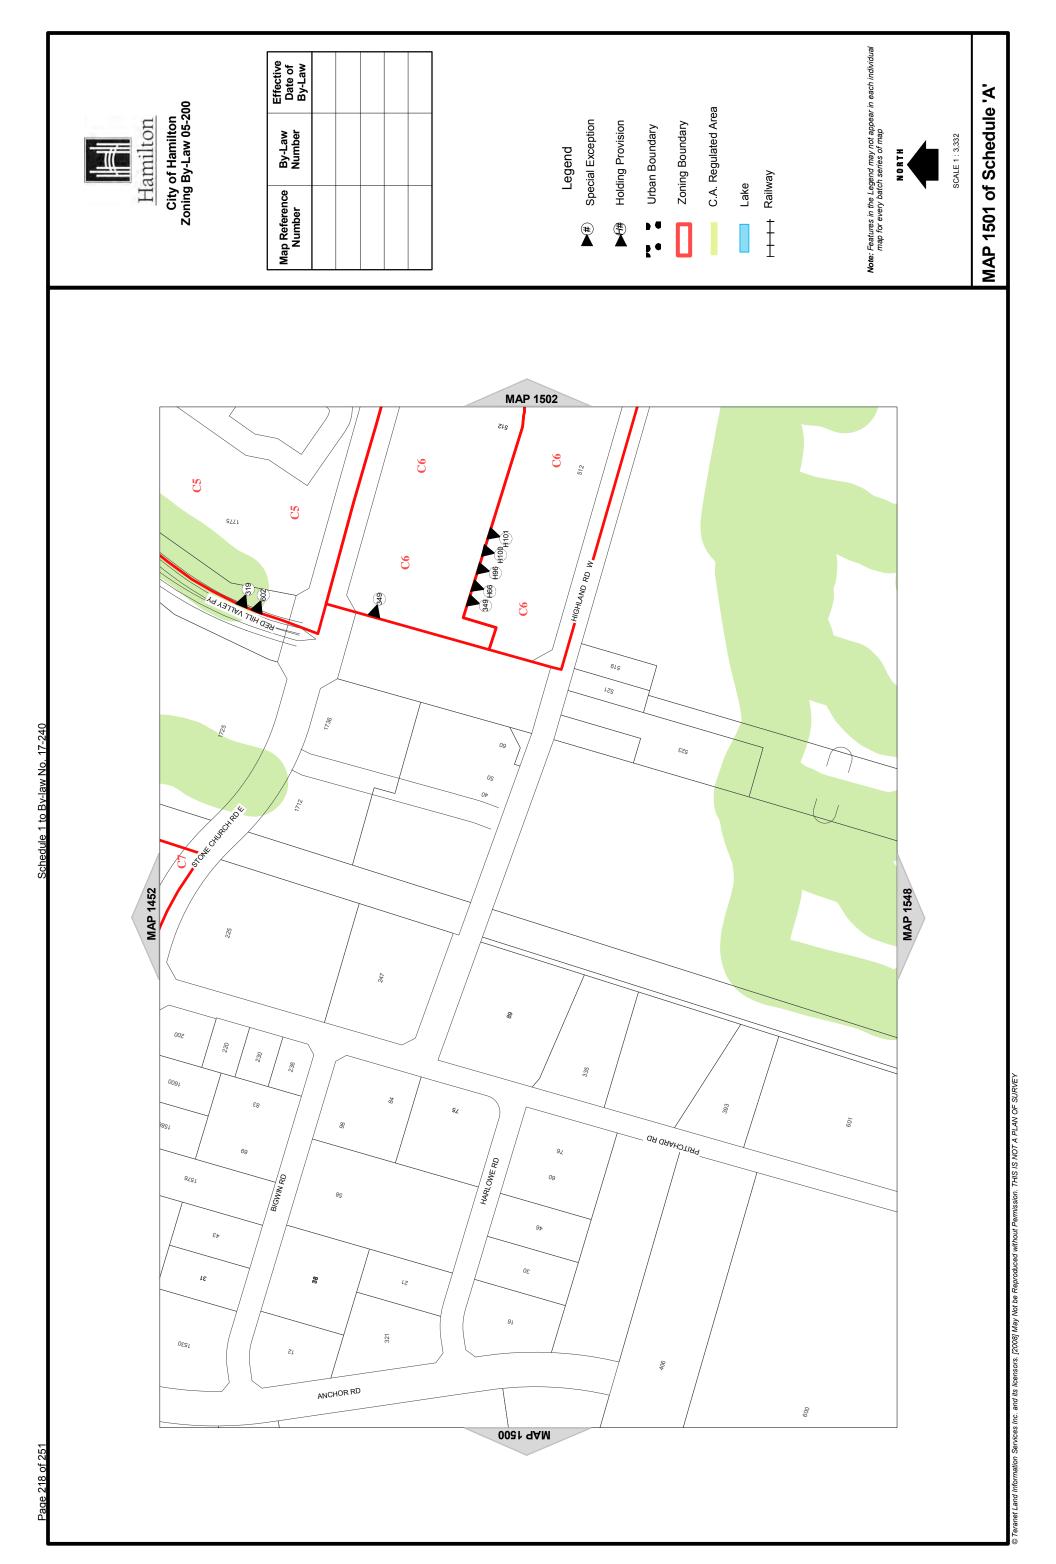



MAP 1454

17 21 MARSTON ST

City of Hamilton Zoning By-Law 05-200

351

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

VENTURA DR

107

VIVA CT

KELSEY GT

43

SPY CT

DALTON GT

LOBO CT

2021 9AM

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake Ī

MAP 1504

Note: Features in the Legend may not appear in each individual map for every batch series of map

y 4 0

40 42 44

135

133

159 127

153

121

411

115

(£79)

GORDON DRUMMOND AV

53

61

20

38 36

50

18

91

ÞL

15

110

C7

ELDERRIDGE CT

DALEGROVE CR

29

23

62

18


83

85

61

MAP 1503 of Schedule 'A'

MAP 1506 SEE RURAL MAP 150 UPPER CENTENNIAL PY C MUD ST SERVICE RD MUDSTW 83 18 17 17 17 17 17 17 MAP 1456 MAP 1552 161 611 611 701 99 PENNYLN DORCHESTER TER 5 W DA TERRI 4021 **9**AM





C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1505 of Schedule 'A'

SCALE 1: 3,332

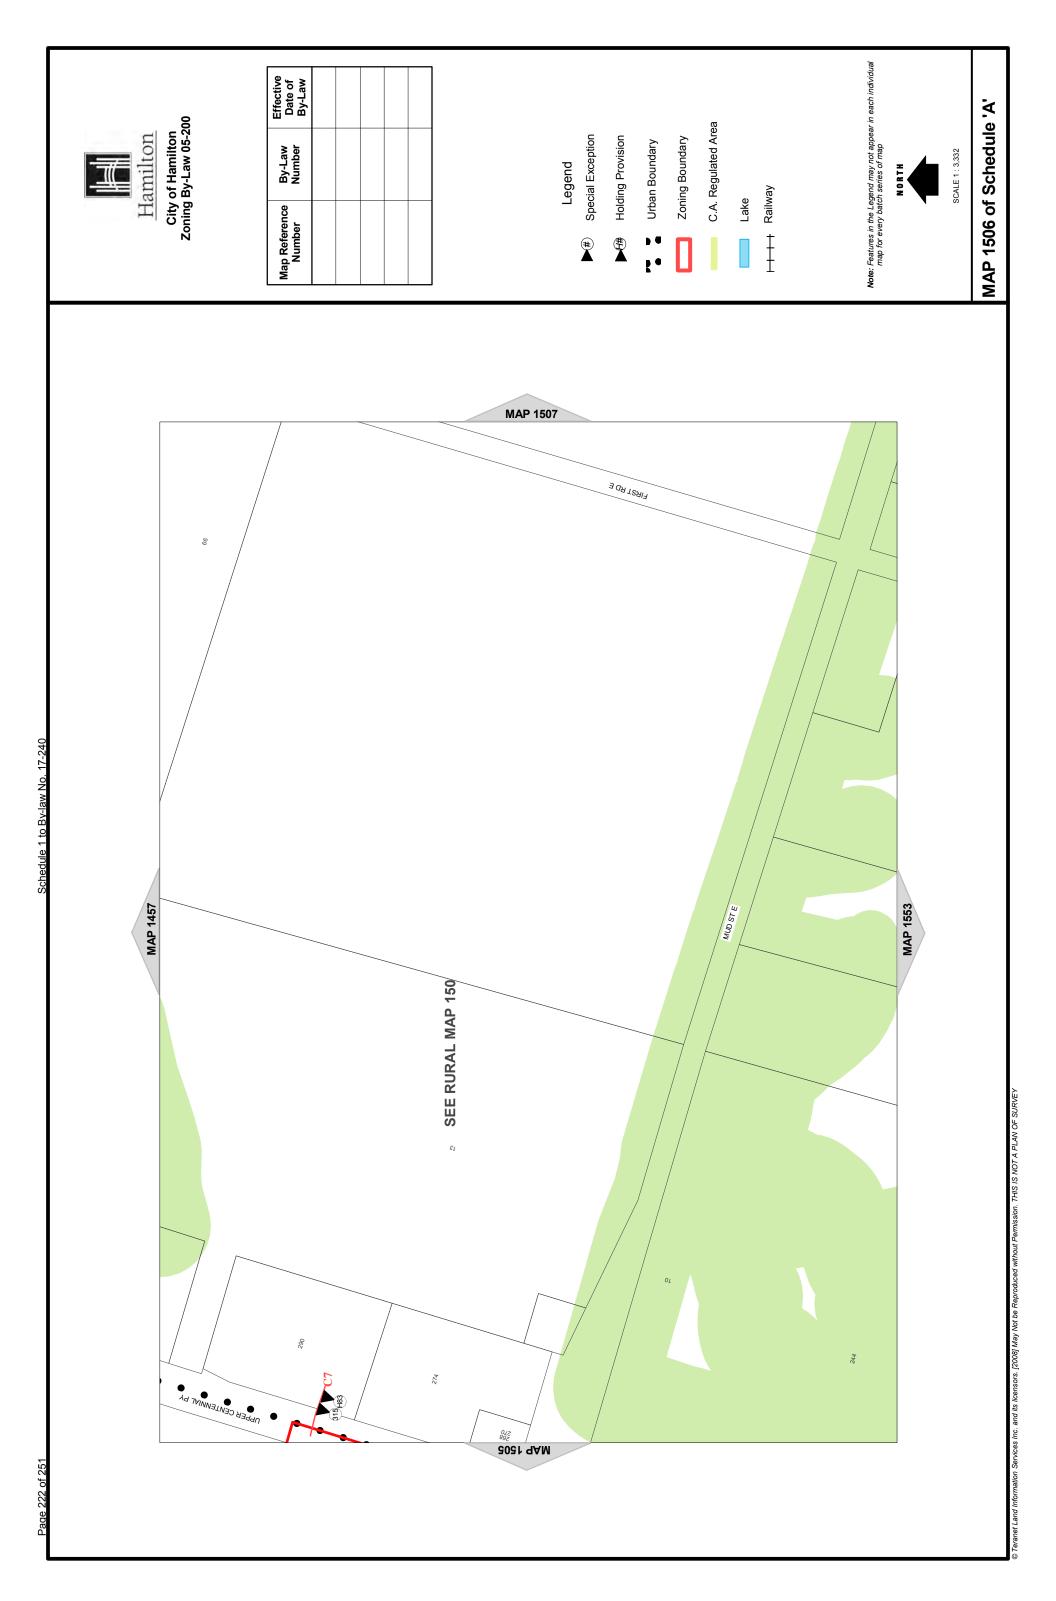

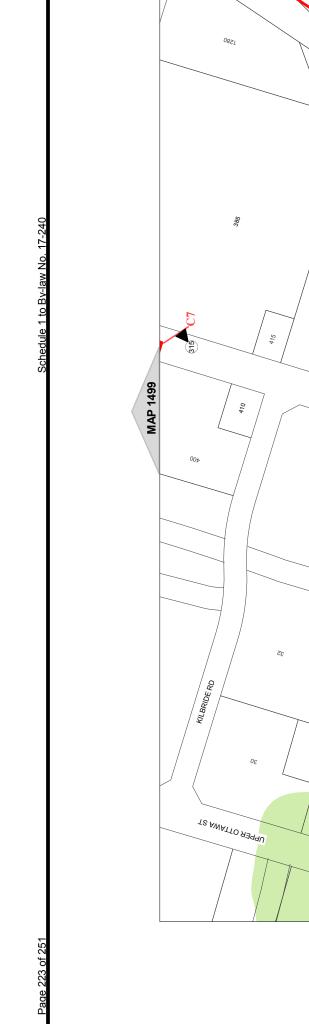

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

City of Hamilton Zoning By-Law 05-200

Hamilton

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

MAP 1547

475

2421 9AM

455


Lake

Railway ‡ ‡ Note: Features in the Legend may not appear in each individual map for every batch series of map


SCALE 1: 3,332


MAP 1546 of Schedule 'A'

583

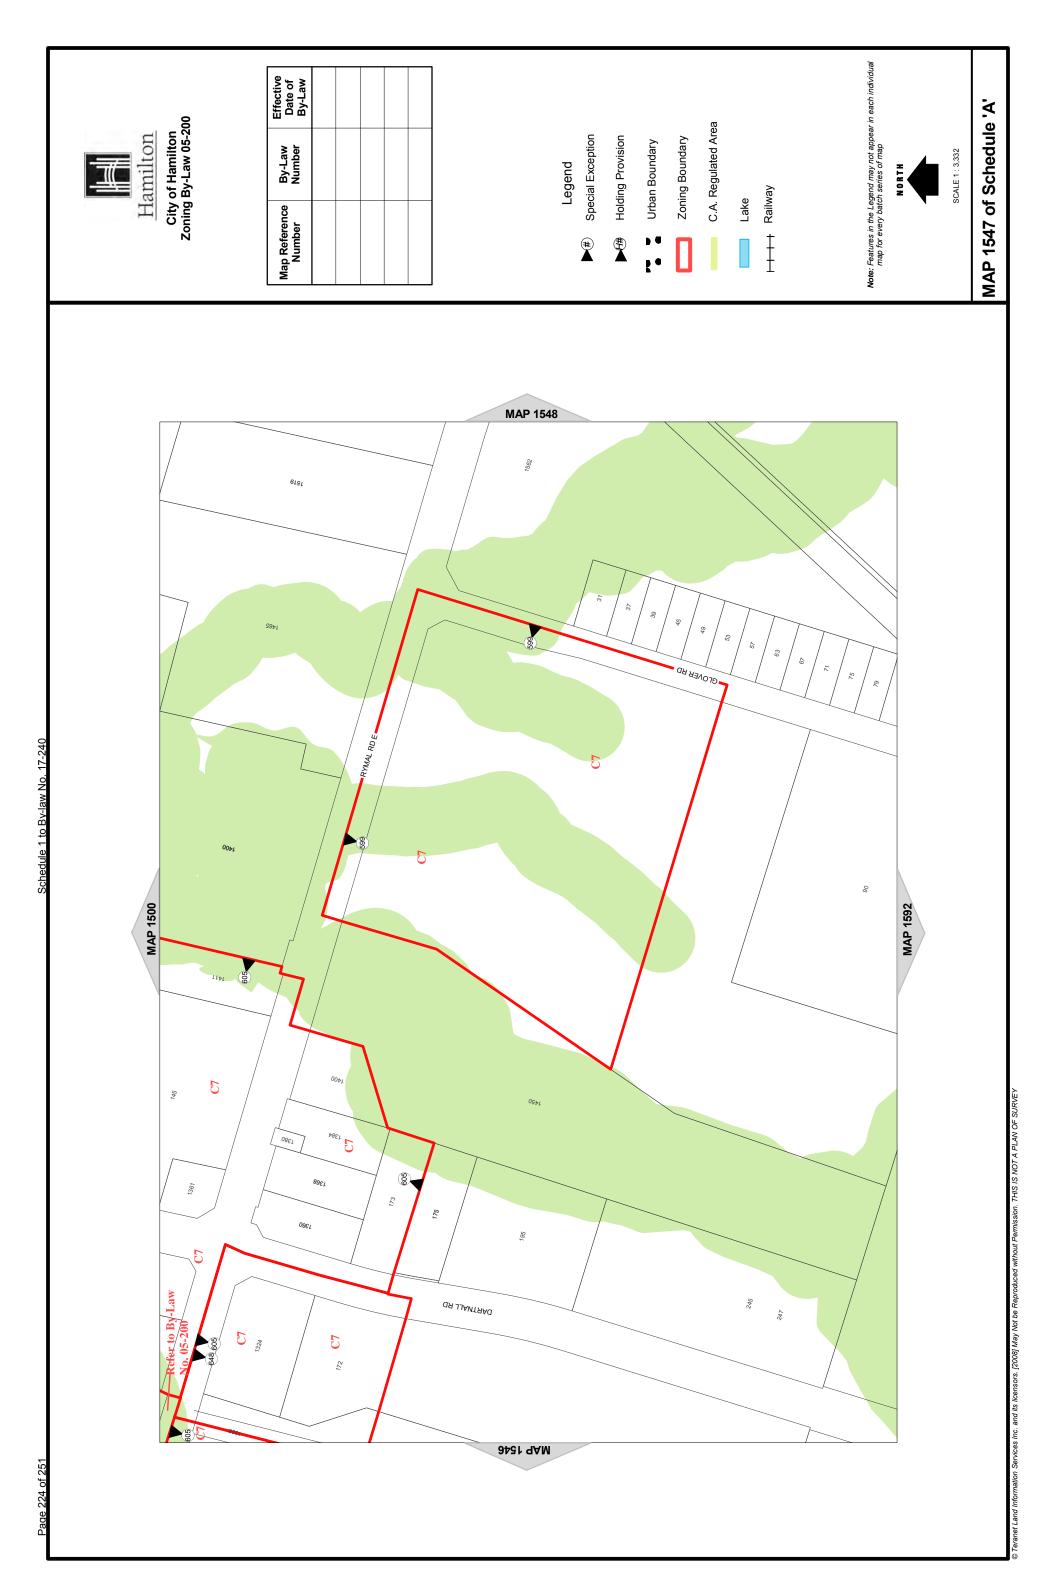

ie Reproduced without Permission. THIS IS NOTA PLAN OF SURVEY

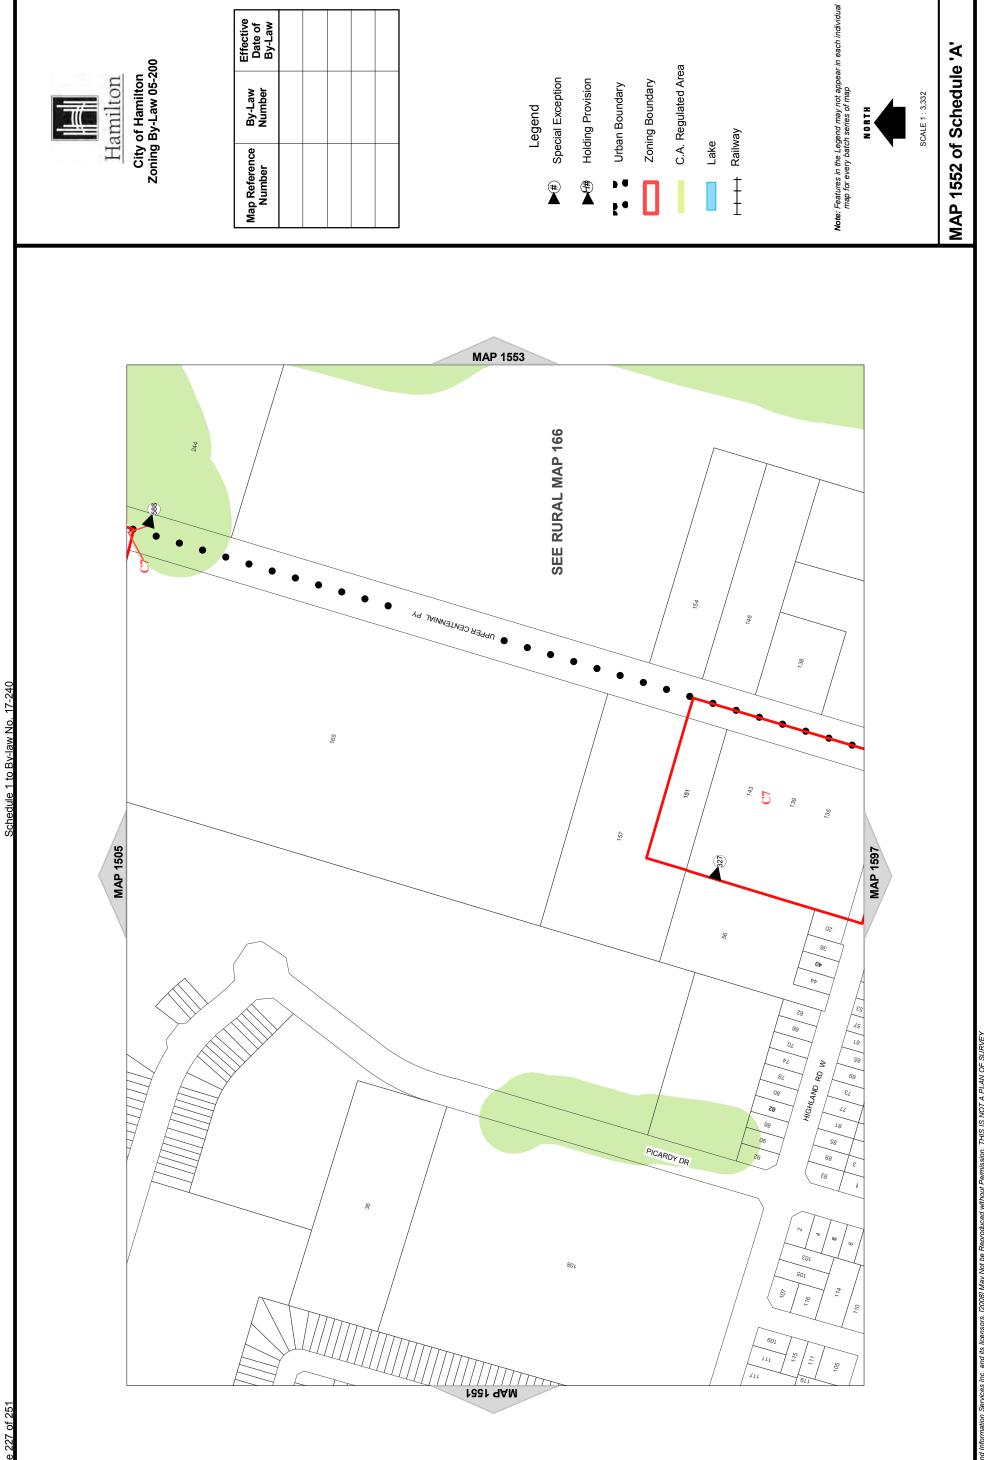

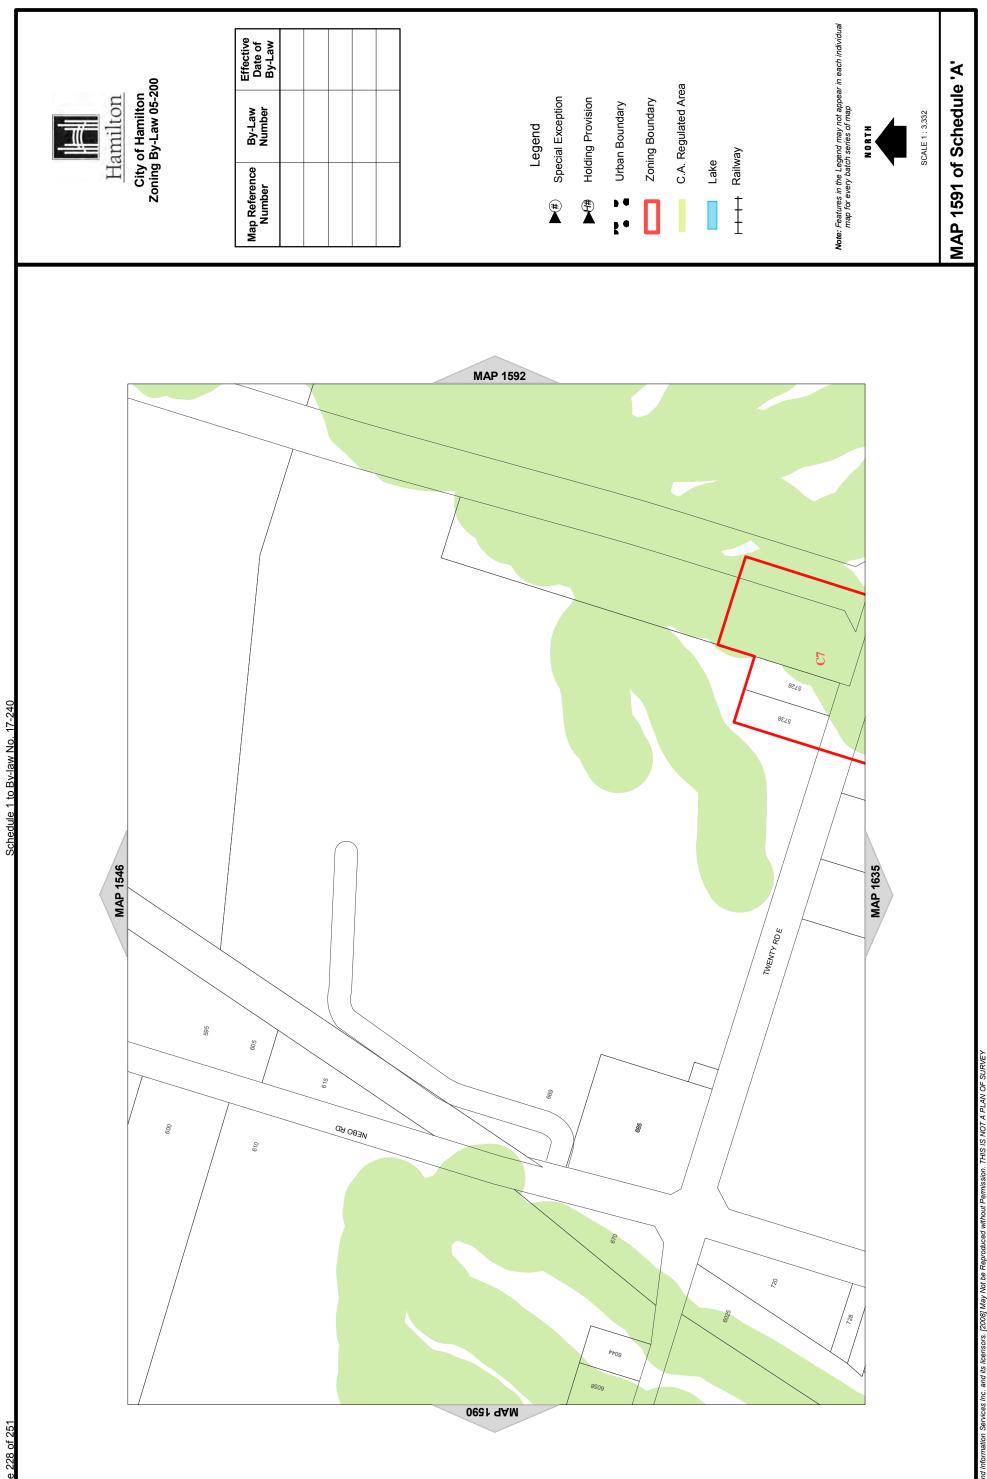

MAP 1594 ~ LILYVALLEY LW BELFLOWERBY \mathbb{S} GERANIUM AV VA MTONAD MAP 1548 **MAP 1637** SEE RURAL MAP 165 TRINITY CHURCH RD 89 **2621 9AM**

Effective Date of By-Law City of Hamilton Zoning By-Law 05-200 Hamilton By-Law Number

Map Reference Number

Special Exception Legend

Holding Provision

Urban Boundary

Zoning Boundary

C.A. Regulated Area

Lake

Railway ‡ ‡ **Note:** Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 1593 of Schedule 'A'

MAP 1549



City of Hamilton Zoning By-Law 05-200

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

PYNAL RD E

1911 C5

1912

ENCLAVE PL

E831 9AM

Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

MAP 1595

FLETCHER RD

C.A. Regulated Area

Lake

Railway

Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1594 of Schedule 'A'

MAP 1638

Effective Date of By-Law

Special Exception

MAP 1595 of Schedule 'A'


MAP 1551



Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Legend Legend Special Exception Holding Provision C.A. Regulated Area	By-Law											ā	
							-egend	cial Exception	ding Provision	an Boundary	ing Boundary	Regulated Are	
	2						_			▶ 4	Zon	C.A.	




MAP 1596 of Schedule 'A'

SCALE 1: 3,332


MAP 1597 S 92 501 8 8 8 76 79 79 79 79 79 79 79	
8 8 8 9 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	
	7
851 SET SET SET SET SET SET SET SET SET SET	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	
330N/18	
8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	
8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	0
21	MAP 1640
61 69 88 8 61 161 161 161 161 161 161 161 161	
25	
\$\frac{1}{2}\frac{1}\frac{1}{2}\f	
S163	
981 981 981 981 981 981 981 981	
2.13 2.13	
96 80 80 80 80 80 80 80 80 80 80 80 80 80	
251 25 25 25 25 25 25 25 25 25 25 25 25 25	


t Land Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SL

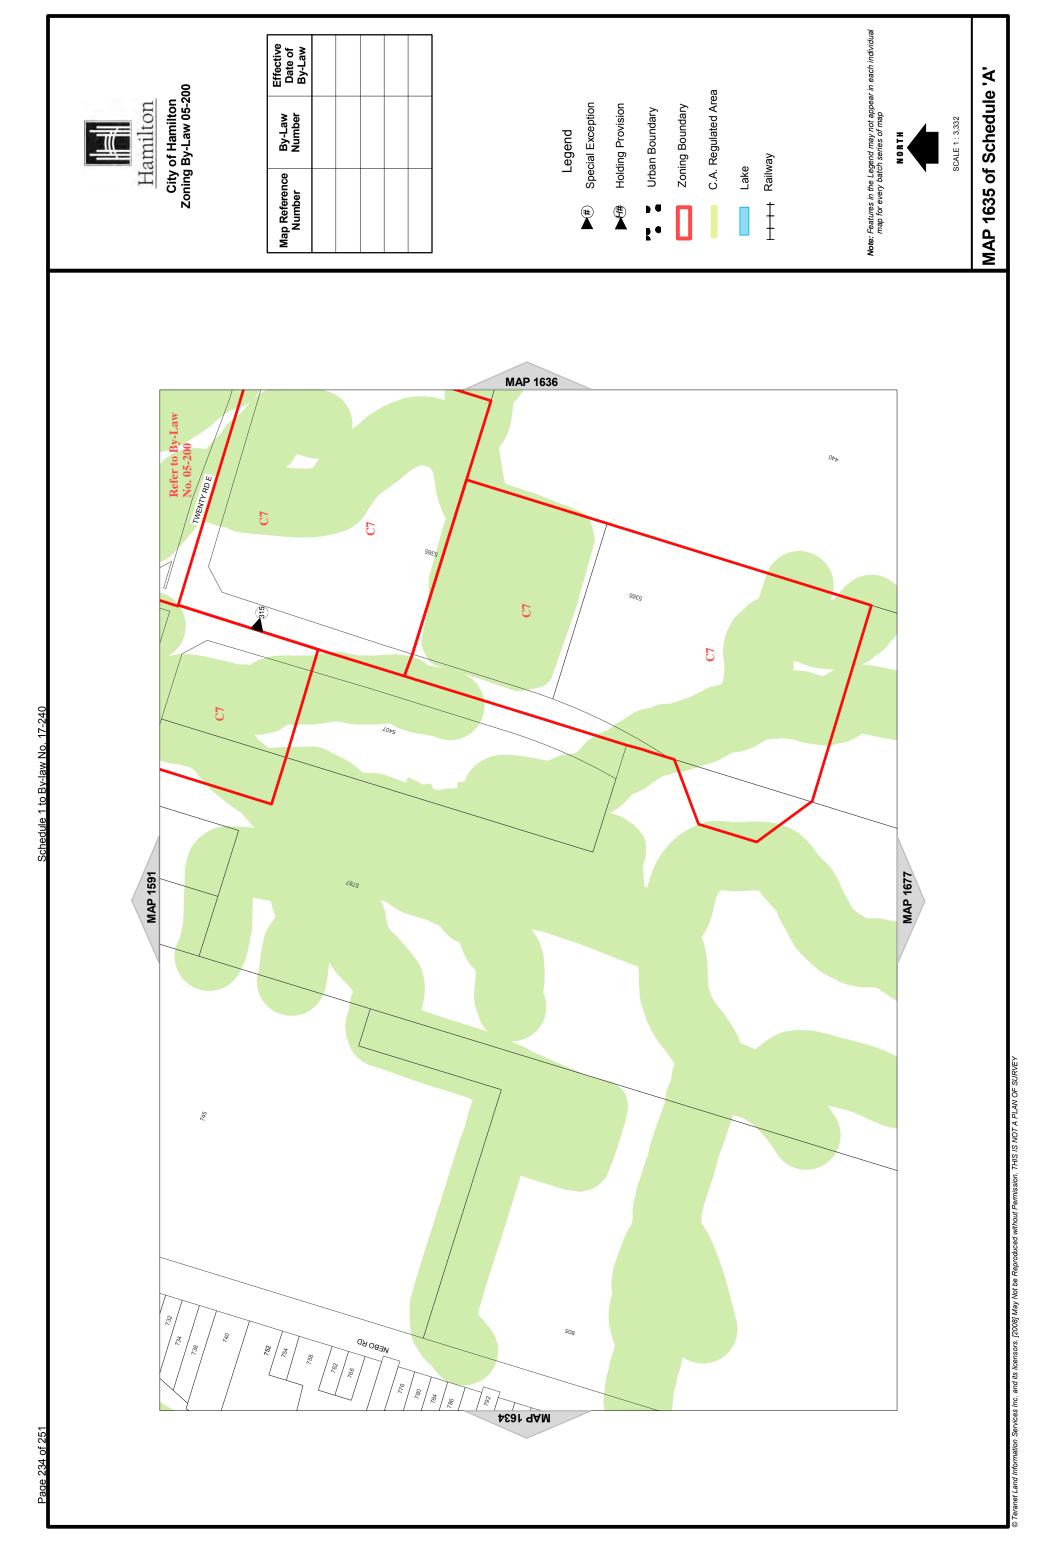





es Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

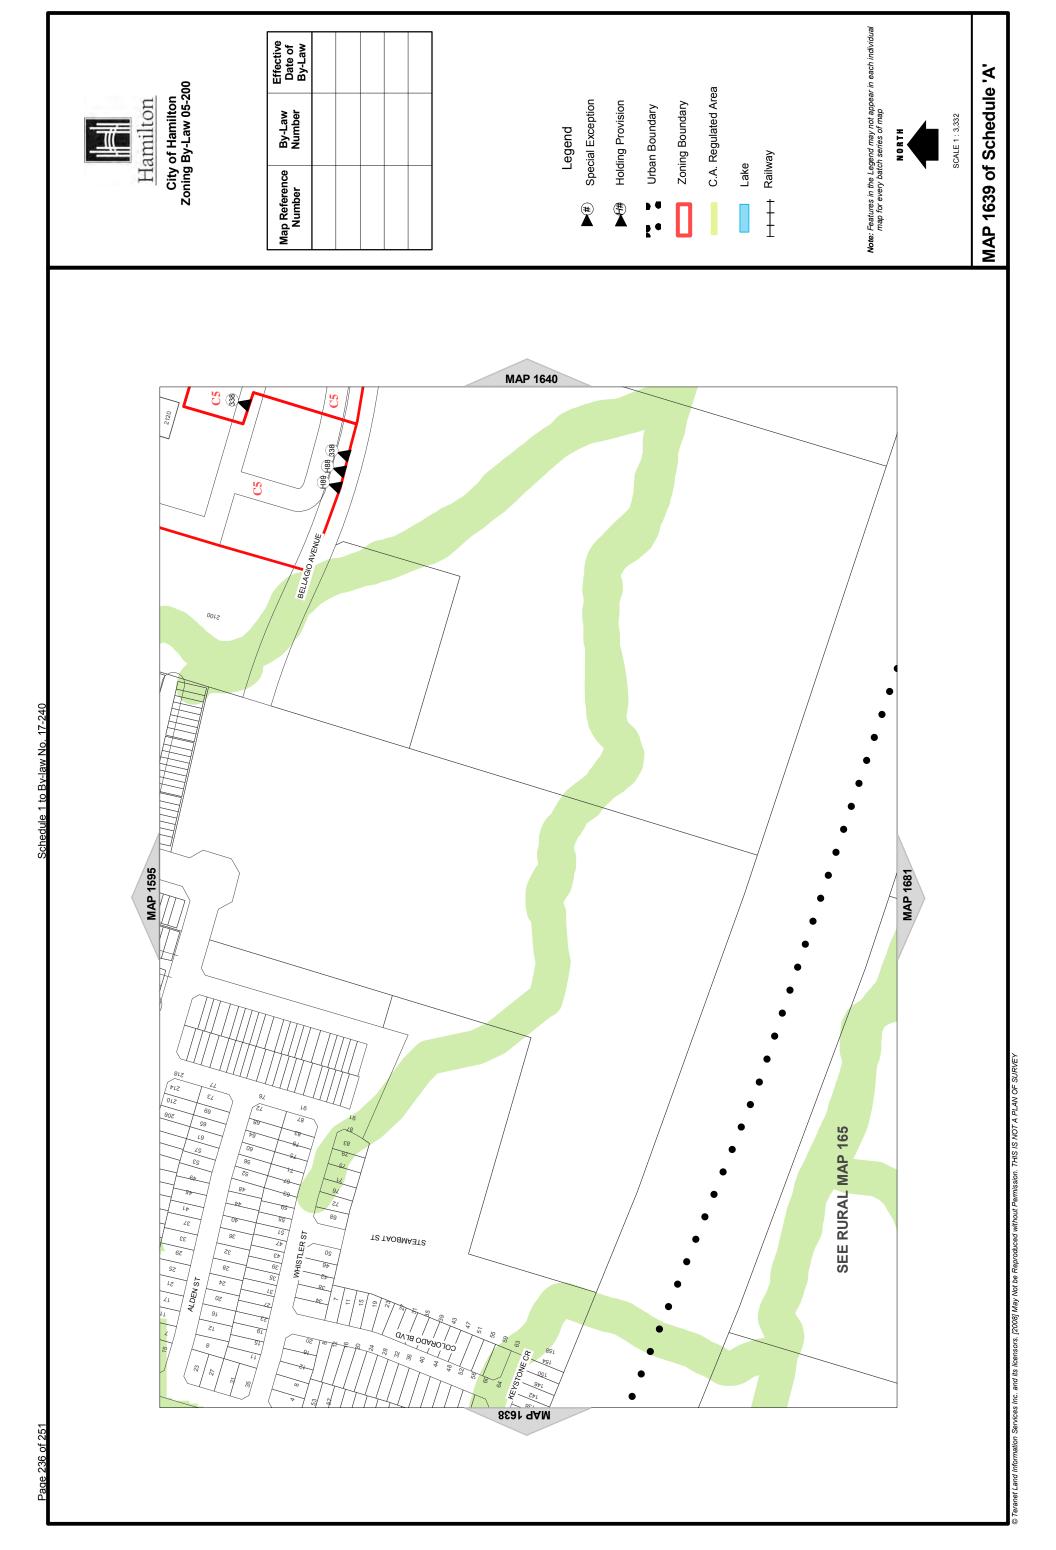

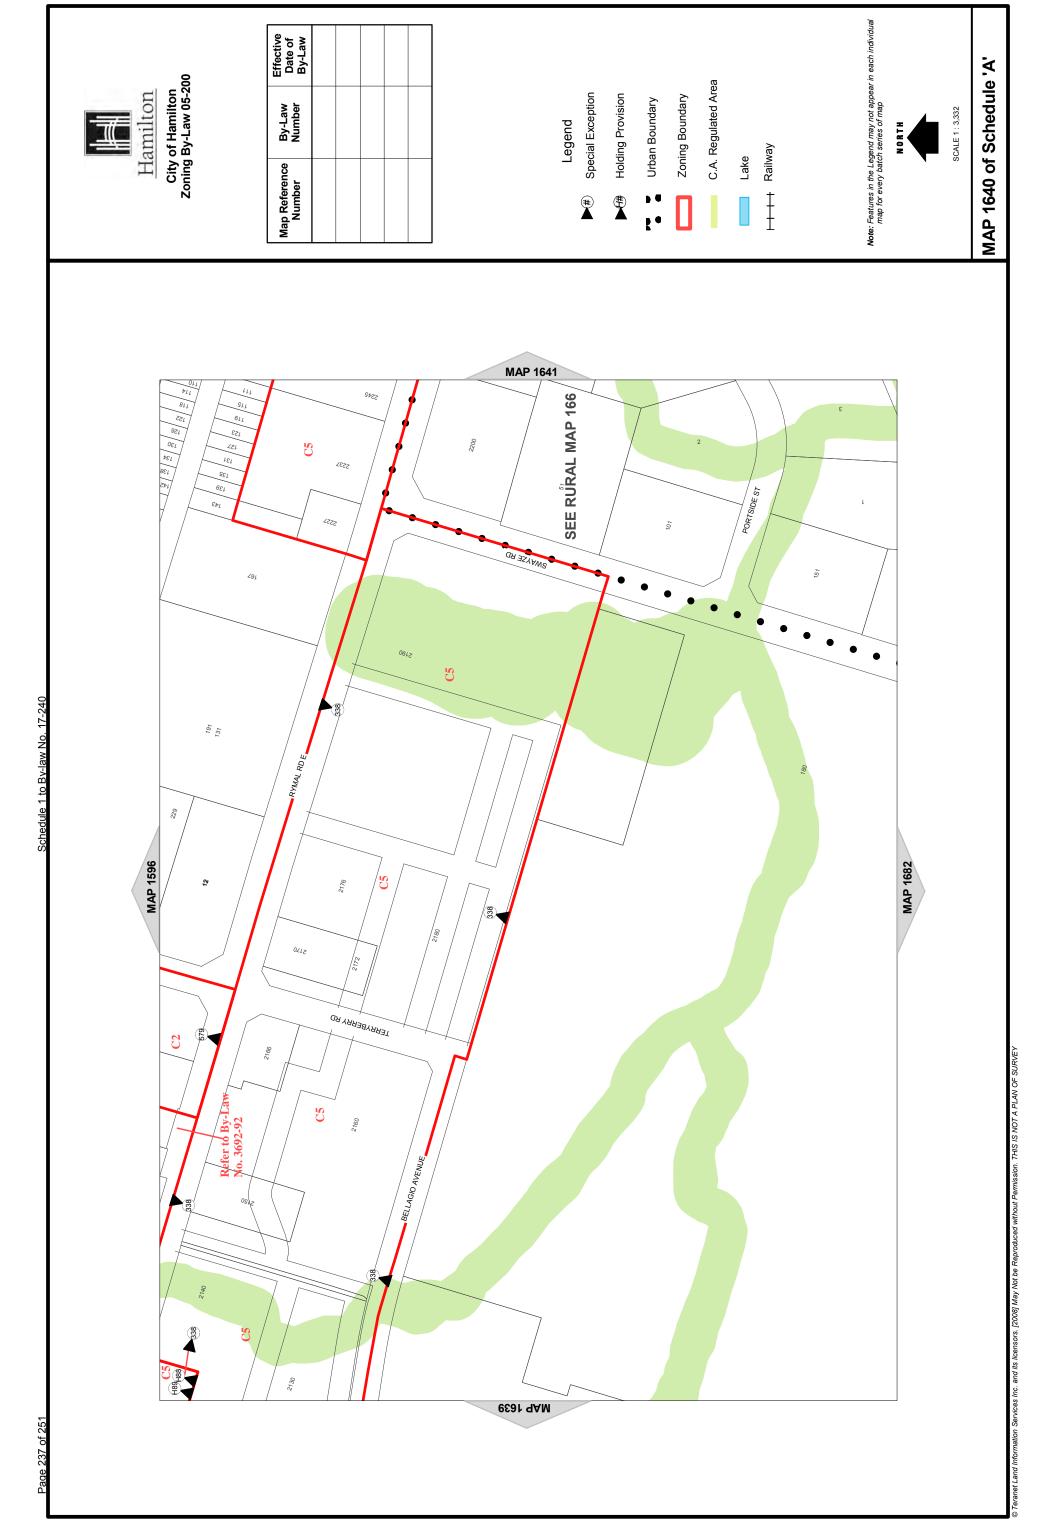

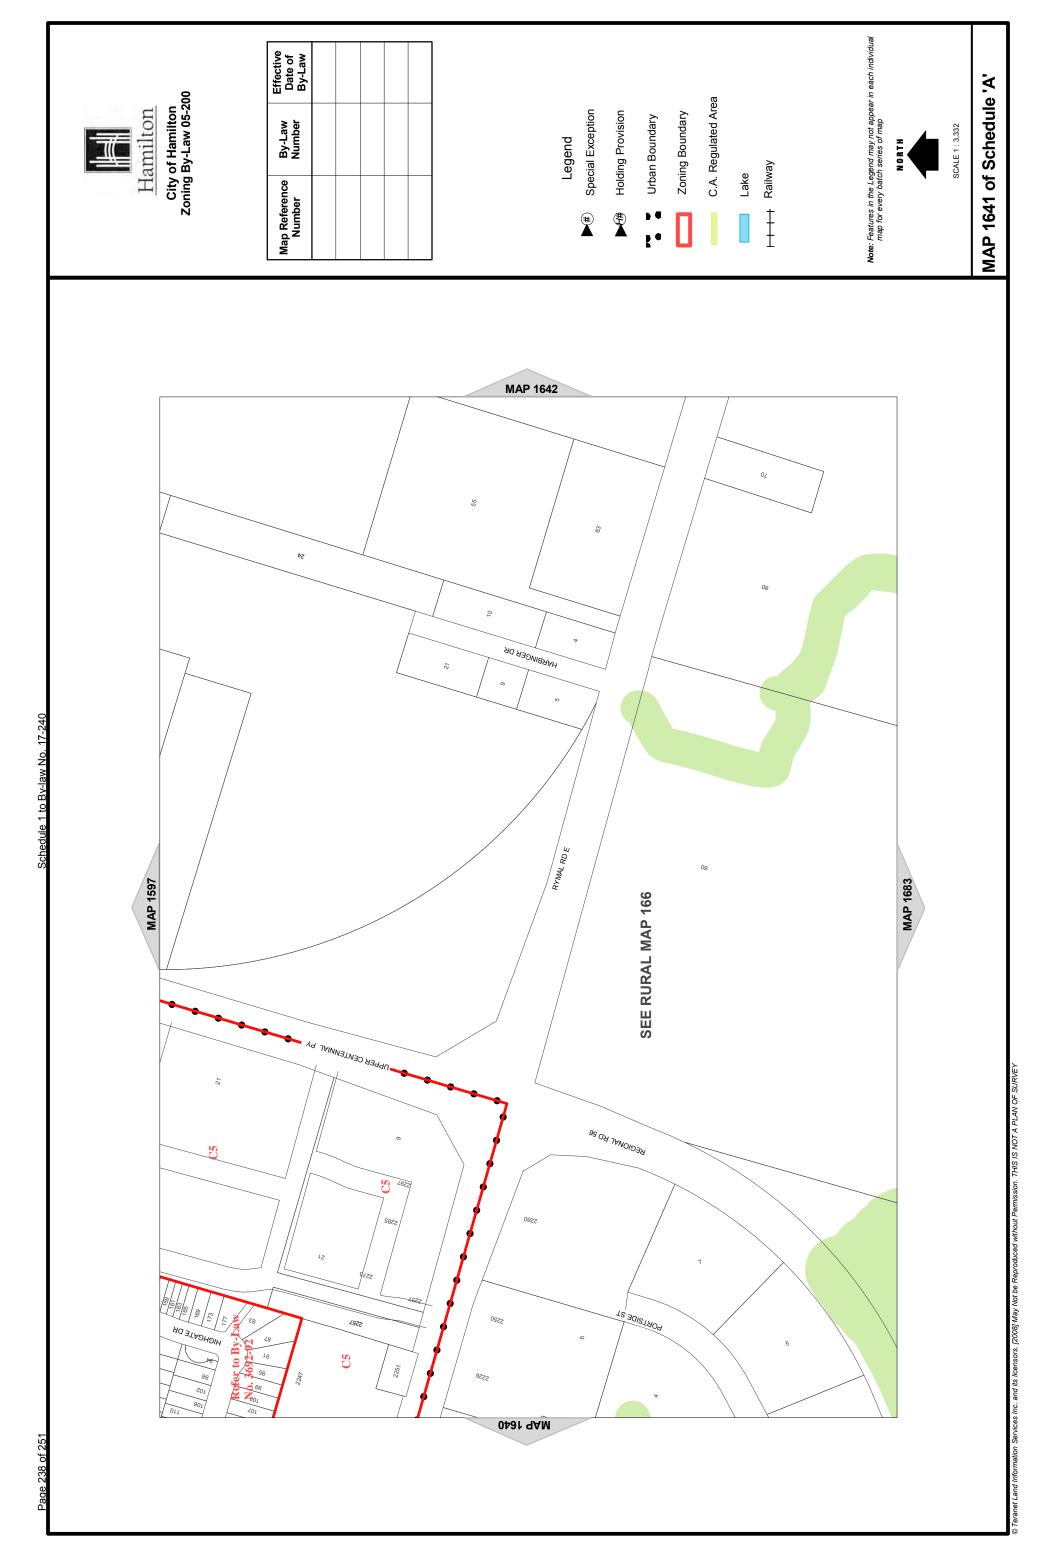

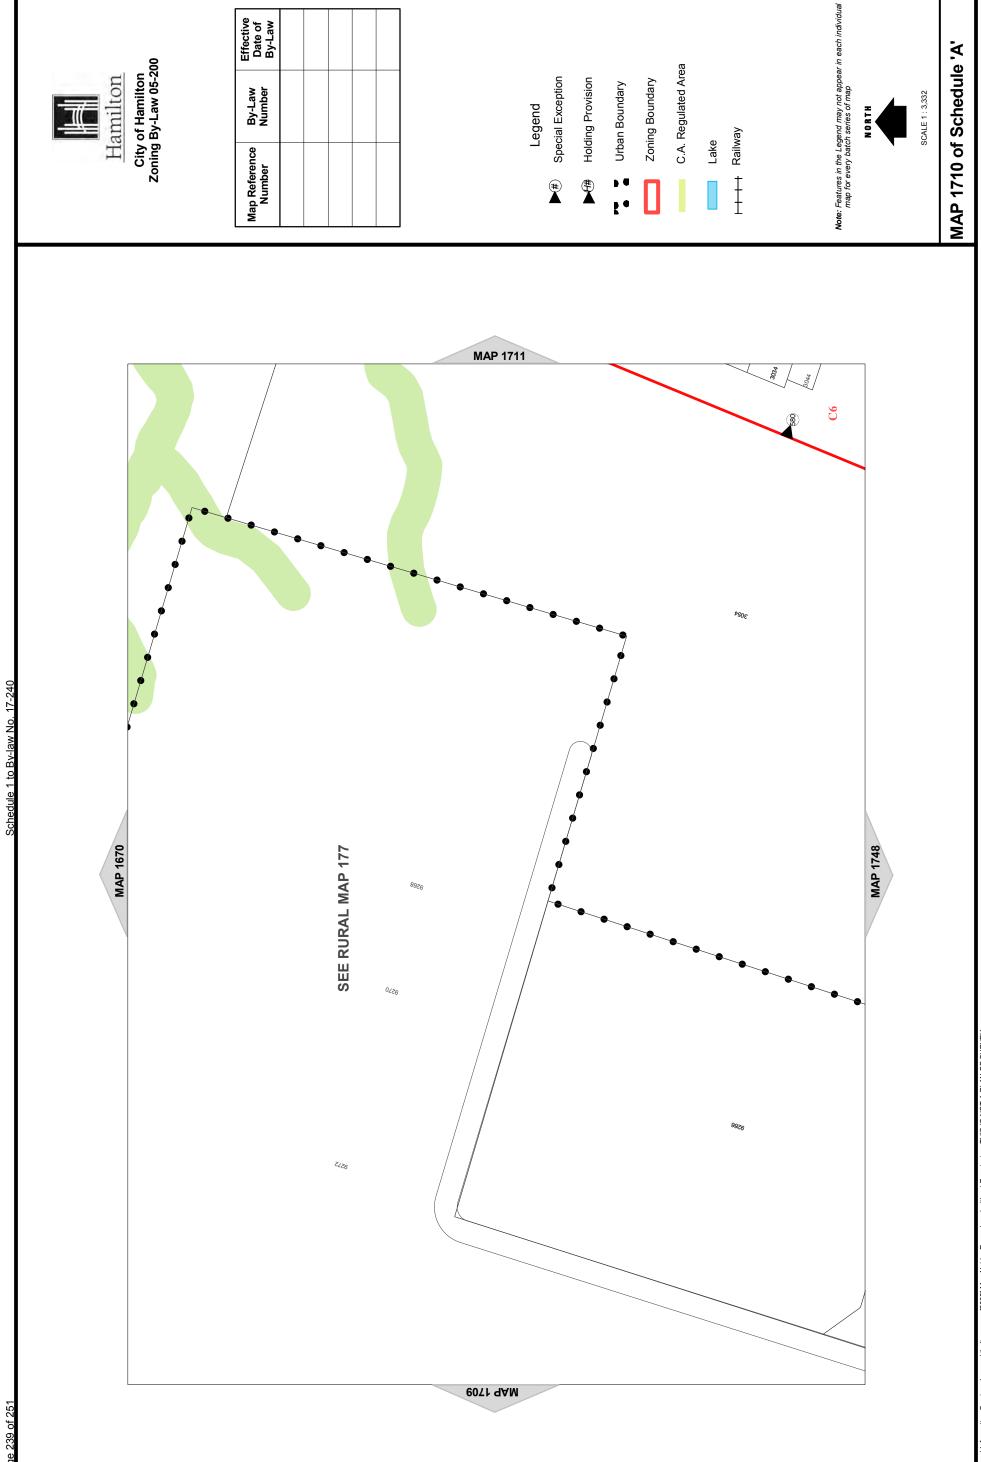

d Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

and Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOTA PLAN OF SUI



Land Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOTA PLAN OF SURVEY

Effective Date of By-Law City of Hamilton Zoning By-Law 05-200 Hamilton By-Law Number Map Reference Number


C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Lake

Railway Ī


Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 1785 of Schedule 'A'

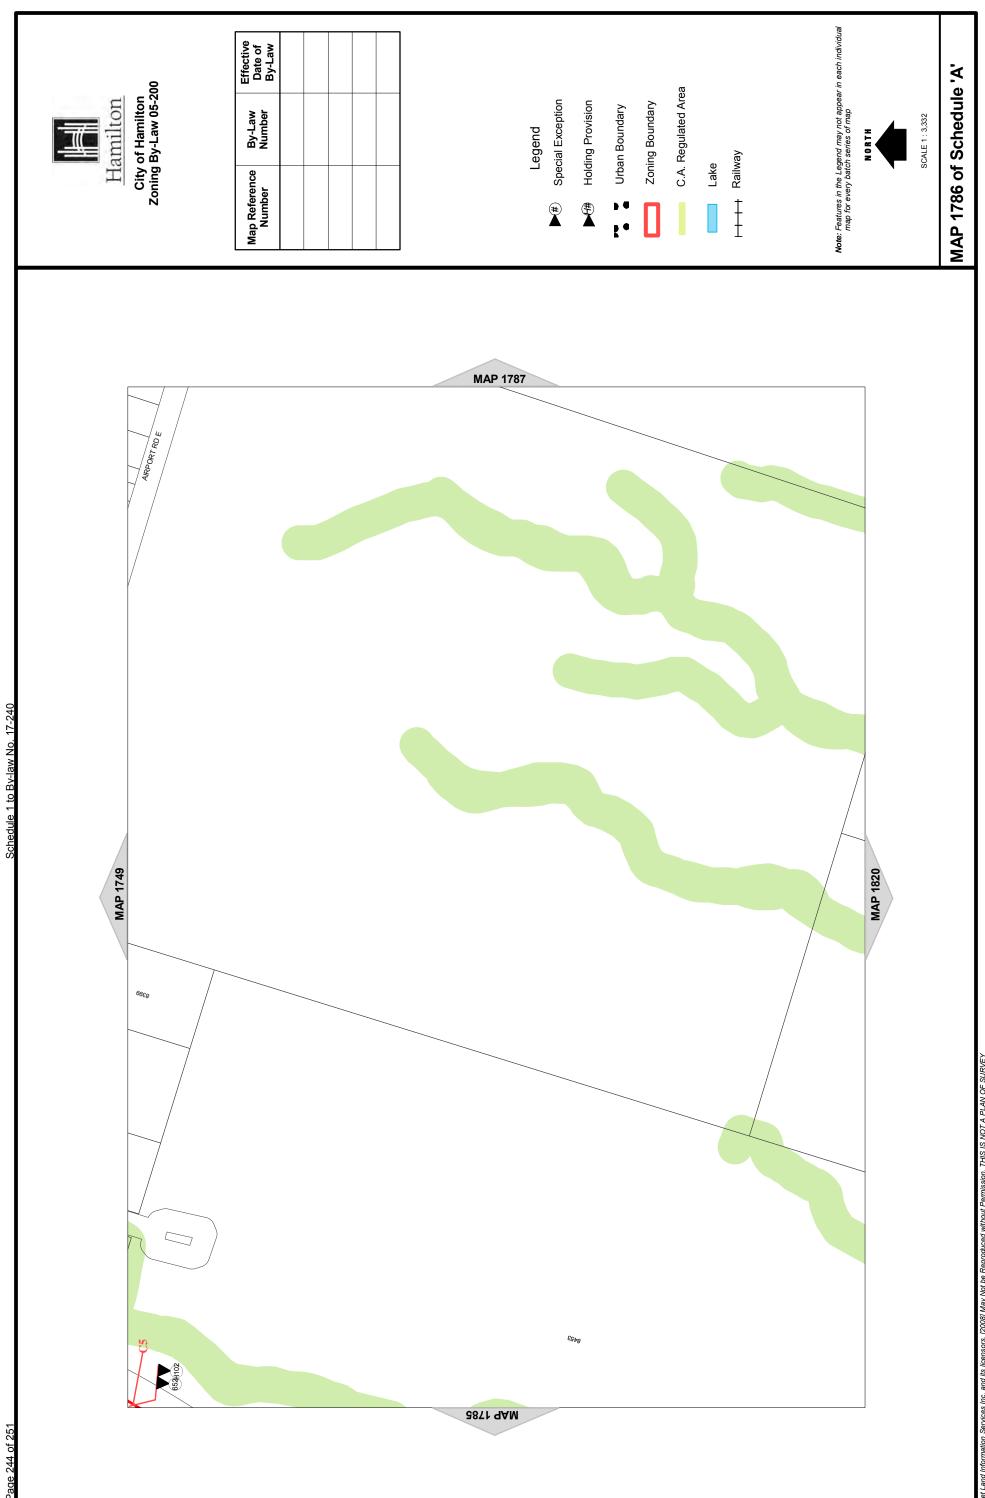

d Information Services Inc. and its licensors. [2008] May Not be Reproduced without Permission. THIS IS NOT A PLAN OF SURVEY

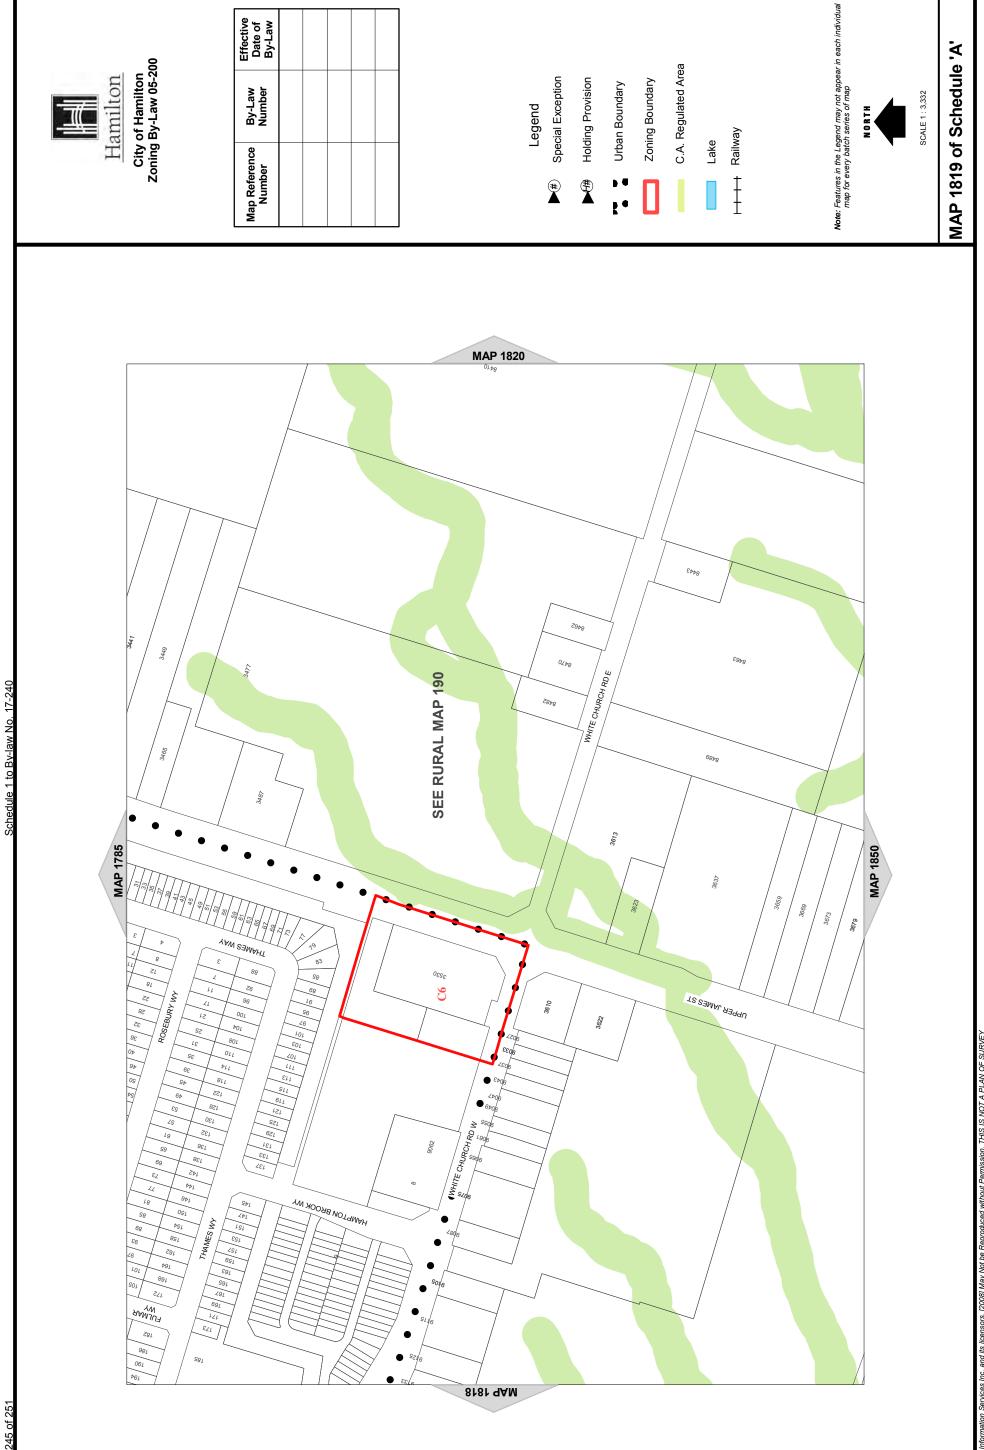

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake ‡ ‡ Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 1887 of Schedule 'A'

City of Hamilton Zoning By-Law 05-200 Hamilton

3095

SEE RURAL MAP 205

140

168 172 941

MAP 1886

3183

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

HILL GARTNER LN (PR) 81 81 61 72 82

39 37 27 23 33 33

GADDYE LN (PR)

23 23 27

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend

MAP 1912

STICKLAND LN (PR)

FALL FAIR WY

30 28 24

2 8 8 8 8

MCKINNELL LN (PR)

21#01 SI#01

0161 **9AM**

BLUE RIBBON WY

MINNERS MY

20 20 18 47

ECKER LN (PR)

ECKER LN (PR)

Lake

Railway Ī

REGIONAL RD 56

C

S

108

153

133

141

JO TWALIANT CL


JO TWALIANT CL


9 4

Note: Features in the Legend may not appear in each individual map for every batch series of map

SCALE 1: 3,332

MAP 1911 of Schedule 'A'

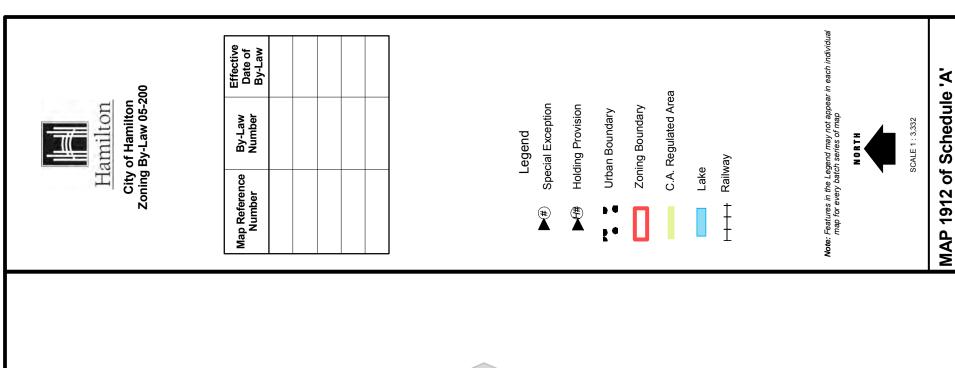

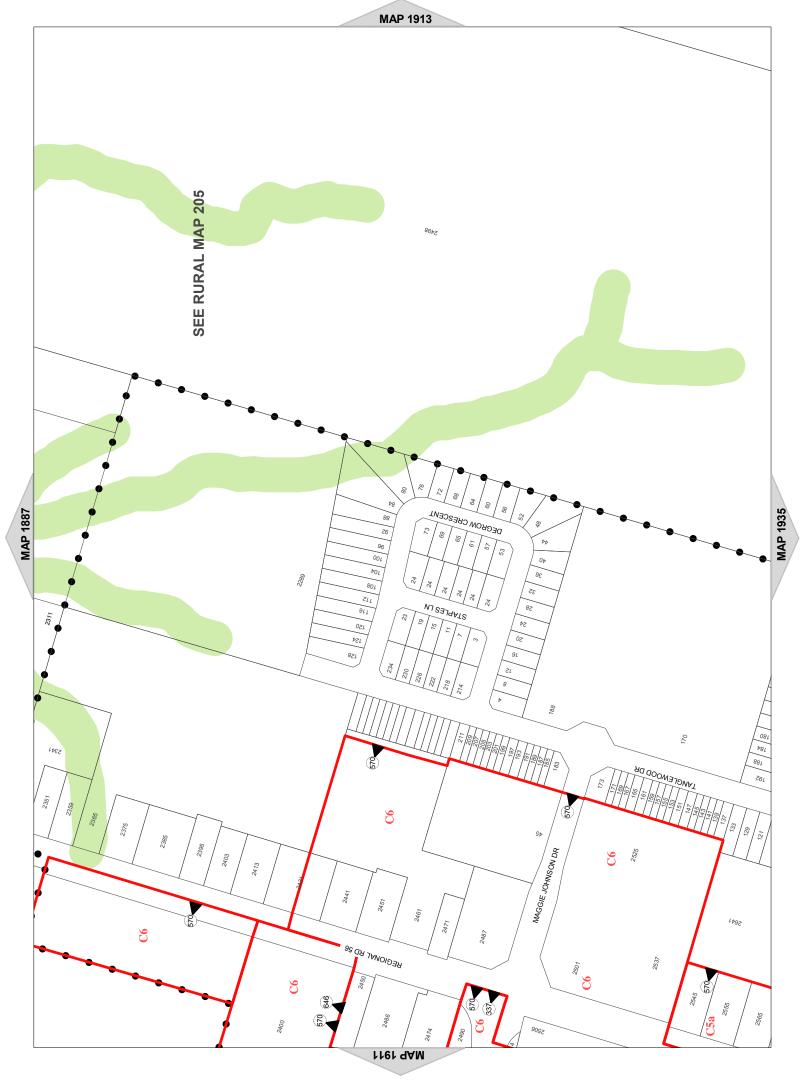

Schedule 1 to By-law No. 17-240

Effective Date of By-Law

By-Law Number

Map Reference Number

City of Hamilton Zoning By-Law 05-200

Hamilton

MAP 1934 of Schedule 'A'

Note: Features in the Legend may not appear in each individual map for every batch series of map

C.A. Regulated Area

Railway Lake

Ī

Zoning Boundary

Urban Boundary

Special Exception

Legend

Holding Provision

SCALE 1: 3,332



City of Hamilton Zoning By-Law 05-200 Hamilton

Effective Date of By-Law			
By-Law Number			
Map Reference Number			

C.A. Regulated Area Special Exception Holding Provision Zoning Boundary Urban Boundary Legend Railway Lake İ Note: Features in the Legend may not appear in each individual map for every batch series of map

MAP 1956 of Schedule 'A'

SCALE 1: 3,332

